



Firestone

**TRUCK TIRE
DATA BOOK**

2018

VERSION 18.1

Firestone

2018 Tire Data Book Medium & Light Truck

TABLE OF CONTENTS

| | |
|--|---------|
| Recommended Medium Truck Tire Application | 2 |
| Medium Truck Tire Size & Availability Chart | 5 |
| Medium Truck Tires | 3 - 23 |
| <i>Medium Truck Tire – Discontinued Products</i> | 22 - 23 |
| Light Truck Tire Size & Availability Chart | 26 |
| Commercial Light Truck Tires | 25 - 29 |
| <i>Commercial Light Truck Tire – Discontinued Products</i> | 29 |
| General Technical Information | 31 - 62 |
| Load & Inflation Tables | 63 - 71 |
| Technical Bulletins | 73 - 87 |
| Truck Tire Comparison Guide | 88 - 89 |

Recommended Medium Truck Tire Application

CHOOSE THE FIRESTONE THAT'S BEST FOR YOU

■ Recommended ▲ Suitable

| SERVICE | MODEL | PAGE | STEER AXLE | DRIVE AXLE | | TRAILER AXLE | |
|---|------------|-------|------------|------------|--------|--------------|--------|
| | | | | SINGLE | TANDEM | TANDEM | SPREAD |
| Long Haul Regional Haul | FS591 | 6 | ■ | ▲ | ▲ | ▲ | |
| | FD691 | 10 | | ■ | ■ | | |
| | FT491 | 13 | | ▲ | ▲ | ■ | ▲ |
| Long Haul Motor Coach | FS400 | 14 | ■ | ▲ | ▲ | ▲ | |
| | FD600 | 15 | | ■ | ■ | | |
| Long Haul Regional Haul Local/Pickup & Delivery | FD690 PLUS | 11 | | ■ | ■ | | |
| | FD663 | 12 | | ■ | ■ | | |
| Regional Haul Local/Pickup & Delivery | FS561 | 7 | ■ | ▲ | ▲ | ▲ | |
| | FS560 PLUS | 9 | ■ | ▲ | ▲ | ▲ | ▲ |
| On/Off-Highway | FS820 | 16 | ■ | ■ | ■ | ▲ | |
| | T819 | 17 | ■ | ■ | ■ | ■ | |
| | T831 | 18 | | ■ | ■ | | |
| | FS818 | 20-21 | ■ | ■ | ■ | ■ | |
| Severe On/Off-Highway | FD835 | 19 | | ■ | ■ | | |

SLOWER TIRE WEAR

FASTER TIRE WEAR



Long Haul Service | Regional Haul Service | Local/Pickup & Delivery Service | On/Off-Highway Service

Medium Truck Tires

| | |
|---|---------|
| Medium Truck Tire Size & Availability Chart | 5 |
| FS591 Fuel-Efficient Steer Tire | 6 |
| FS561 Steer Tire | 7 |
| FS560 PLUS All-Position Tire | 9 |
| FD691 Fuel-Efficient Drive Tire | 10 |
| FD690 PLUS Drive Tire | 11 |
| FD663 Drive Tire | 12 |
| FT491 Fuel-Efficient Trailer Tire | 13 |
| FS400 All-Position Tire | 14 |
| FD600 Drive Tire | 15 |
| FS820 On/Off-Highway All-Position Tire | 16 |
| T819 On/Off-Highway All-Position Tire | 17 |
| T831 On/Off-Highway Drive Tire | 18 |
| FD835 On/Off-Highway Drive Tire | 19 |
| FS818 On/Off-Highway All-Position Wide Base Tire | 20 - 21 |
| Medium Truck Tire – Discontinued Products | 22 - 23 |

Medium Truck Tire Size & Availability Charts

LOAD RANGE & TREAD DEPTHS (IN 32NDS) INDICATE AVAILABILITY

| FIRESTONE | FS591 | FS561 | FS560 PLUS | FD691 | FD690 PLUS | FD663 | FT491 | FS400 | FD600 | FS820 | T819 | T831 | FD835 | FS818 |
|--|--------------------------|-----------------|-----------------|-------|-----------------|-----------------|-------|---------------|-------|-----------------|-----------------|-------|-------|-------|
| SmartWay® Verified & CARB Compliant | ■ | | | ■ | | | ■ | | | | | | | |
| PAGE | 6 | 7 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20-21 |
| REPLACES BFGOODRICH | ST244 | ST230 | ST230 | DR454 | | | | | | | | | DR675 | ST565 |
| REPLACES CONTINENTAL | | | | | | | | HSL1 Coach | HDR2 | | | | | |
| REPLACES HANKOOK | AL11, AL07+ | AH12 | AH12 | DL11 | DL12, DL07 | DH06, Z35A | TL01 | | | AM06 | AM06 | DM04 | | AM15 |
| REPLACES YOKOHAMA | 101ZL, RY617 | 108ZR, RY023 | 103ZR, RY023 | 709ZL | 703ZL, TY577 | SY767, TY303 | RY587 | None | None | MY507, 501ZA | MY507, 501ZA | LY053 | LY053 | |
| SIZE | LOAD RANGE - TREAD DEPTH | | | | | | | | | | | | | |
| 9R22.5 | | F-19 | | | | | | | | | | | | |
| 10R22.5 | | F/G-20 | | | | F-25 | | | | | | | | |
| 11R22.5 | G/H-18 | G/H-21 | G/H-19 | G-26 | G-29 | G/H-26 | G-11 | | | H-24 | H-20 | H-31 | | |
| 12R22.5 | | H-21 | | | | H-26 | | | | | H-20 | H-31 | | |
| 11R24.5 | G/H-18 | G/H-21 | G/H-20 | G-26 | G-29 | G/H-26 | G-11 | | | H-24 | H-20 | H-31 | H-33 | |
| 12R24.5 | | | | | | | | | | | H-20 | | | |
| 215/75R17.5 | | H-15 | | | | | | | | | | | | |
| 225/70R19.5 | | F/G-16 | | | F/G-19 | | | | | | | | | |
| 245/70R19.5 | | F/G-18 | | | G-20 | | | | | | | | | |
| 255/70R22.5 | | | H-18 | | | | H-11 | | | | | | | |
| 275/70R22.5 | | J-21 | | | | | | | | | | | | |
| 295/75R22.5 | G/H-18 | G-21 | G-19 | G-26 | G-29 | G-26 | G-11 | | | | | | | |
| 315/80R22.5 | | | | | | | | L-18 | J-27 | L-26 | L-20 | | | |
| 385/65R22.5 | | | | | | | | | | | | | | J-23 |
| 425/65R22.5 | | | | | | | | | | | | | | L-23 |
| 445/65R22.5 | | | | | | | | | | | | | | L-24 |
| 285/75R24.5 | G-18 | G-21 | G-19 | G-26 | G-29 | G-26 | G-11 | | | | | | | |



FS591

Fuel-Efficient Steer Tire

- Combines low rolling resistance tread and energy-saving casing design to optimize fuel efficiency.
- ULTI-Rib™ and Defense Side Groove™ designs combat the initiation and spread of irregular wear.
- A wider and deeper tread and proprietary shoulder design results in greater removal mileage and irregular wear resistance.
- Innovative sidewall design reduces overall tire weight to improve fuel efficiency without sacrificing durability.

Recommended Application

An all-position tire recommended for steer applications in:
Long Haul Service / Regional Haul Service

Replaces: BFGoodrich: ST244
 Hankook: AL11, AL07+
 Yokohama: 101ZL, RY617

EPA SmartWay® verified
 and CARB compliant.

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS591 | | | | | | | | | | | | | | | |
| 11R22.5 | G | 238-532 | 118 | 8.25 | 41.1 | 11.5 | 19.2 | 12.3 | 504 | 18 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R22.5 | H | 238-549 | 119 | 8.25 | 41.1 | 11.5 | 19.2 | 12.3 | 504 | 18 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 75 |
| 11R24.5 | G | 238-566 | 126 | 8.25 | 43.1 | 11.5 | 20.2 | 12.3 | 480 | 18 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 11R24.5 | H | 238-583 | 127 | 8.25 | 43.1 | 11.5 | 20.2 | 12.3 | 480 | 18 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 75 |
| 295/75R22.5 | G | 233-738 | 114 | 8.25 | 40.2 | 11.4 | 18.8 | 12.5 | 516 | 18 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 295/75R22.5 | H | 233-755 | 115 | 8.25 | 40.2 | 11.4 | 18.8 | 12.5 | 516 | 18 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 75 |
| 285/75R24.5 | G | 238-498 | 120 | 8.25 | 41.3 | 11.4 | 19.4 | 12.2 | 502 | 18 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FS561 Steer Tire

- Tread cap compound and solid shoulder ribs enhance resistance to maneuvering scrub, leading to increased tread life.
- Stone rejectors in center grooves help provide resistance to stone drilling and protect belts for enhanced casing durability.
- Stress relief sipes fight irregular wear by absorbing rib edge stresses in the footprint for long, even wear.
- Sidewall protector ribs help protect the casing from cuts, snags and abrasions due to curbing and impacts.
- Innovative sidewall design reduces overall weight to improve fuel efficiency without sacrificing durability.

Recommended Application

An all-position tire recommended for steer application in:
Regional Haul Service / Pickup & Delivery Service

NOT recommended for spread axle, heavy haul, high-scrub applications.

Replaces: BFGoodrich: ST230

Hankook: AH12

Yokohama: 108ZR, RY023

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS561 | | | | | | | | | | | | | | | |
| 9R22.5 | F | 248-562 | 90 | 6.75 | 38.4 | 9 | 18 | 9.9 | 541 | 19 | 2060@720 | 4540@105 | 1950@720 | 4300@105 | 75 |
| 10R22.5 | F | 248-579 | 109 | 7.50 | 40.2 | 9.9 | 18.8 | 10.9 | 517 | 20 | 2360@690 | 5205@100 | 2240@690 | 4940@100 | 75 |
| 10R22.5 | G | 248-596 | 109 | 7.50 | 40.2 | 9.9 | 18.8 | 10.9 | 517 | 20 | 2575@790 | 5675@115 | 2430@790 | 5355@115 | 75 |
| 11R22.5 | G | 248-307 | 114 | 8.25 | 41.5 | 10.9 | 19.3 | 12 | 501 | 21 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R22.5 | H | 248-324 | 114 | 8.25 | 41.5 | 10.9 | 19.3 | 12 | 501 | 21 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 75 |
| 12R22.5 | H | 248-494 | 139 | 9.00 | 42.7 | 11.6 | 19.8 | 12.8 | 487 | 21 | 3350@830 | 7390@120 | 3075@830 | 6780@120 | 75 |
| 11R24.5 | G | 248-358 | 120 | 8.25 | 43.6 | 10.9 | 20.4 | 12 | 477 | 21 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 11R24.5 | H | 248-375 | 120 | 8.25 | 43.6 | 10.9 | 20.4 | 12 | 477 | 21 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 75 |
| 215/75R17.5 | H | 248-511 | 66 | 6.00 | 30.7 | 8.8 | 14.4 | 9.7 | 677 | 15 | 2180@830 | 4805@120 | 2060@830 | 4540@120 | 65 |
| 225/70R19.5 | F | 248-409 | 64 | 6.00 | 32.2 | 8.7 | 15.0 | 9.5 | 644 | 16 | 1650@660 | 3640@95 | 1550@660 | 3415@95 | 75 |
| 225/70R19.5 | G | 248-426 | 64 | 6.00 | 32.2 | 8.7 | 15.0 | 9.5 | 644 | 16 | 1800@760 | 3970@110 | 1700@760 | 3750@110 | 75 |
| 245/70R19.5 | F | 248-443 | 82 | 6.75 | 33.3 | 9.3 | 15.5 | 10.3 | 623 | 18 | 1850@660 | 4080@95 | 1750@660 | 3860@95 | 75 |
| 245/70R19.5 | G | 248-477 | 82 | 6.75 | 33.3 | 9.3 | 15.5 | 10.3 | 623 | 18 | 2060@760 | 4545@110 | 1985@760 | 4375@110 | 75 |
| 275/70R22.5 | J | 248-545 | 99 | 8.25 | 38.1 | 11.5 | 17.9 | 12.7 | 545 | 21 | 3150@900 | 6940@130 | 2900@900 | 6395@130 | 75 |
| 295/75R22.5 | G | 248-273 | 111 | 8.25 | 40.4 | 10.9 | 18.9 | 12 | 514 | 21 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 248-290 | 121 | 8.25 | 41.5 | 10.9 | 19.5 | 12 | 501 | 21 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



Standard Profile

Low-Profile



FS560 PLUS

All-Position Tire

- Wide flow-through grooves and cross-rib sipes help to enhance traction.
- Wider tread spreads load over a larger area, distributing footprint pressure to promote long, smooth wear.
- Protector ribs on both sidewalls help resist cuts, snags, and abrasions from curbing and impacts.

Recommended Application

An all-position tire recommended for steer applications and suitable for spread axle, heavy haul, high-scrub applications in:

**Regional Haul Service
Pickup & Delivery Service**

Replaces: Continental: HSR2, HSR
Yokohama: 103ZR, RY023

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|-------------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS560 PLUS | | | | | | | | | | | | | | | |
| 11R22.5 | G | 156-531 | 114 | 8.25 | 41.3 | 10.8 | 19.3 | 11.8 | 503 | 19 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R22.5 | H | 156-558 | 114 | 8.25 | 41.3 | 10.8 | 19.3 | 11.8 | 503 | 19 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 75 |
| 11R24.5 | G | 156-574 | 122 | 8.25 | 43.3 | 10.7 | 20.3 | 11.7 | 480 | 19 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 11R24.5 | H | 156-582 | 122 | 8.25 | 43.3 | 10.7 | 20.3 | 11.7 | 480 | 19 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 75 |
| 255/70R22.5 | H | 192-982 | 93 | 8.25 | 36.7 | 10.3 | 17.1 | 11.3 | 567 | 18 | 2500@830 | 5510@120 | 2300@830 | 5070@120 | 75 |
| 295/75R22.5 | G | 156-566 | 111 | 8.25 | 40.3 | 10.9 | 18.8 | 11.8 | 515 | 19 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 156-590 | 116 | 8.25 | 41.5 | 10.6 | 19.5 | 11.9 | 501 | 19 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FD691

*Fuel-Efficient
Drive Tire*

- Special cap and sidewall compounds and construction improve wear life and irregular wear resistance without sacrificing traction.
- Bead design helps to lower rolling resistance and improve fuel economy.
- Innovative low rolling resistance casing saves fuel throughout the life-cycle of the casing.
- Innovative sidewall design reduces overall tire weight to improve fuel efficiency without sacrificing durability.

Recommended Application

A drive tire recommended for tandem- and single-drive axle applications in:

Long Haul Service / Regional Haul Service

Replaces: BFGoodrich: DR454

Hankook: DL11

Yokohama: 709ZL

EPA SmartWay® verified
and CARB compliant.

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FD691 | | | | | | | | | | | | | | | |
| 11R22.5 | G | 241-558 | 126 | 8.25 | 41.9 | 11.3 | 19.5 | 12.4 | 496 | 26 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R24.5 | G | 241-575 | 132 | 8.25 | 43.7 | 11.2 | 20.4 | 12.3 | 475 | 26 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 295/75R22.5 | G | 241-524 | 118 | 8.25 | 40.6 | 11.3 | 18.9 | 12.5 | 512 | 26 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 241-541 | 125 | 8.25 | 41.8 | 11.3 | 19.6 | 12.5 | 497 | 26 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FD690 PLUS

Drive Tire

- Suitable for single- and tandem-axle drive radials.
- Solid shoulder design distributes weight and torque evenly to fight irregular wear.
- Solid shoulder and aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread.
- Cap/base compounding combines a slow-wearing cap compound with a cool-running base that shields the casing from damaging heat to enhance retreadability.

Recommended Application

A drive tire recommended for tandem- and single-drive axle applications in:

**Long Haul Service / Regional Haul Service
Pickup & Delivery Service**

Replaces: Hankook: DL12, DL07
Yokohama: 703ZL, TY577

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|-------------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FD690 PLUS | | | | | | | | | | | | | | | |
| 11R22.5 | G | 006-504 | 122 | 8.25 | 42.1 | 10.8 | 19.6 | 11.8 | 493 | 29 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R24.5 | G | 006-506 | 137 | 8.25 | 44.0 | 10.7 | 20.5 | 11.8 | 472 | 29 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 225/70R19.5 | F | 186-675 | 70 | 6.00 | 32.3 | 8.5 | 15.0 | 9.4 | 643 | 19 | 1650@660 | 3640@95 | 1550@660 | 3415@95 | 75 |
| 225/70R19.5 | G | 227-074 | 70 | 6.00 | 32.3 | 8.5 | 15.0 | 9.4 | 643 | 19 | 1800@760 | 3970@110 | 1700@760 | 3750@110 | 75 |
| 245/70R19.5 | G | 006-510 | 79 | 6.75 | 33.5 | 9.1 | 15.5 | 10.0 | 620 | 20 | 2060@760 | 4545@110 | 1985@760 | 4375@110 | 75 |
| 295/75R22.5 | G | 006-6514 | 122 | 8.25 | 41.0 | 11.1 | 19.1 | 12.2 | 507 | 29 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 006-6516 | 128 | 8.25 | 42.2 | 10.9 | 19.8 | 11.9 | 492 | 29 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FD663 Drive Tire

- Tie bars control movement of tread blocks to help minimize irregular wear tendencies, leading to long service life.
- Open-shoulder design helps to provide traction and grip in mud and snow.
- Four full-width steel belts help casing durability and enhance retreadability by combating casing penetration.
- Cap/base compounding combines a slow-wearing cap compound with a cool-running base that shields the casing from damaging heat to enhance retreadability.

Recommended Application

A drive tire recommended for high traction and high-scrub drive axle applications in:

**Long Haul Service / Regional Haul Service
Pickup & Delivery Service**

Replaces: Hankook: DH06, Z35A
Yokohama: SY767, TY303

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FD663 | | | | | | | | | | | | | | | |
| 10R22.5 | F | 281-034 | 110 | 7.50 | 40.5 | 9.8 | 18.9 | 10.8 | 513 | 25 | 2360@690 | 5205@100 | 2240@690 | 4940@100 | 75 |
| 11R22.5 | G | 281-042 | 125 | 8.25 | 41.9 | 10.7 | 19.5 | 11.8 | 496 | 26 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R22.5 | H | 211-206 | 125 | 8.25 | 41.9 | 10.8 | 19.5 | 11.9 | 496 | 26 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 75 |
| 12R22.5 | H | 151-009 | 154 | 9.00 | 43.0 | 11.6 | 20.0 | 12.6 | 483 | 26 | 3350@830 | 7390@120 | 3075@830 | 6780@120 | 75 |
| 11R24.5 | G | 281-069 | 133 | 8.25 | 43.9 | 10.7 | 20.5 | 11.8 | 473 | 26 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 11R24.5 | H | 293-733 | 134 | 8.25 | 43.9 | 10.7 | 20.5 | 11.8 | 473 | 26 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 75 |
| 295/75R22.5 | G | 281-050 | 117 | 8.25 | 40.6 | 11.1 | 18.9 | 12.2 | 512 | 26 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 281-077 | 122 | 8.25 | 41.9 | 10.6 | 19.6 | 11.7 | 496 | 26 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FT491

*Fuel-Efficient
Trailer Tire*

- Sidewall protector ribs resist curb damage and abrasion.
- ULTI-Rib™ and Defense Groove™ designs combat the initiation and spread of irregular wear.
- Wider tread spreads load over a larger area, distributing footprint pressure to promote long, smooth wear. The wider design takes a full-size drive cap for even more low-cost miles.
- Innovative sidewall design reduces overall tire weight to improve fuel efficiency without sacrificing durability.

Recommended Application

A trailer tire suitable for single- and tandem-axle trailer and dolly applications in:

Long Haul Service / Regional Haul Service

Replaces: Hankook: TL01
Yokohama: RY587

EPA SmartWay® verified
and CARB compliant.

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FT491 | | | | | | | | | | | | | | | |
| 11R22.5 | G | 006-634 | 103 | 8.25 | 40.9 | 11.3 | 19.1 | 12.5 | 507 | 11 | 2800@720 | 6175@105 | 2650@720 | 5840@105 | 75 |
| 11R24.5 | G | 006-635 | 109 | 8.25 | 42.9 | 11.4 | 20.1 | 12.5 | 485 | 11 | 3000@720 | 6610@105 | 2725@720 | 6005@105 | 75 |
| 255/70R22.5 | H | 006-636 | 84 | 8.25 | 36.3 | 10.4 | 17.1 | 11.5 | 572 | 11 | 2500@830 | 5510@120 | 2300@830 | 5070@120 | 75 |
| 295/75R22.5 | G | 006-638 | 94 | 8.25 | 39.7 | 11.3 | 18.6 | 12.5 | 523 | 11 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |
| 285/75R24.5 | G | 006-640 | 100 | 8.25 | 41.0 | 11.3 | 19.3 | 12.4 | 507 | 11 | 2800@760 | 6175@110 | 2575@760 | 5675@110 | 75 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FS400 All-Position Tire

- Built for heavy loads in on-highway and inter-city bus service.
- Deep tread, flow-through grooves and cross-rib siping provide long life and high traction in all weather conditions.
- Shoulder wear protector ribs combat initiation and spread of irregular wear.
- Stone-rejector platforms help prevent the retention of casing-damaging stones for enhanced retreadability.

Recommended Application

An all-position tire recommended for:
Long Haul Service / Motor Coach

Replaces: Continental: HSL 1 Coach

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS400 | | | | | | | | | | | | | | | |
| 315/80R22.5† | L | 004-168 | 146 | 9.00 | 42.4 | 12.4 | 19.7 | 13.9 | 490 | 18 | 4250@900 | 9370@130 | 4000@900 | 8820@130 | 75 |

† Requires the use of a 9.00-inch rim to carry over 8,000 lbs.

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FD600 Drive Tire

- Open-shoulder lug pattern and tread design help to provide aggressive traction on wet and dry conditions.
- Individual traction blocks and multiple block edges offer improved pulling power.
- Flow-through design allows for water evacuation to help enhance road grip.
- Cap/base compounding combines a slow-wearing cap compound with a cool-running base that shields the casing from damaging heat to enhance retreadability.

Recommended Application

An all-position tire recommended for:
Long Haul Service / Motor Coach

Replaces: Continental: HDR2

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|---------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FD600 | | | | | | | | | | | | | | | |
| 315/80R22.5 † | J | 219-696 | 165 | 9.00 | 42.9 | 12.4 | 19.9 | 13.6 | 484 | 27 | 3750@830 | 8270@120 | 3450@830 | 7610@120 | 75 |

† Requires the use of a 9.00-inch rim to carry over 8,000 lbs.

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FS820

*On/Off-Highway
All-Position Tire*

- Special tread compounds help resist cuts, chips, and tears for long original tread life.
- Rugged five-rib design combats stone retention for long mileage and retreadability.
- All-steel casing construction and cap/base compounding helps resist cuts and improves durability and retreadability.
- Stone rejecter platforms (center groove 315/80R22.5; each major groove 11R22.5 & 11R24.5) protect belts from potential damage.

Recommended Application

An all-position tire recommended for steer, drive, and trailer positions in on/off-highway service.

Replaces: Hankook: AM06
Yokohama: MY507, 501ZA

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS820 | | | | | | | | | | | | | | | |
| 11R22.5 | H | 241-252 | 134 | 8.25 | 42.0 | 10.9 | 19.5 | 12.0 | 495 | 24 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 65 |
| 11R24.5 | H | 233-840 | 144 | 8.25 | 44.0 | 10.9 | 20.5 | 12.0 | 472 | 24 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 65 |
| 315/80R22.5 | L | 233-874 | 148 | 9.00 | 42.9 | 12.6 | 19.9 | 13.9 | 484 | 26 | 4125@900 | 9090@130 | 3750@900 | 8270@130 | 65 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



T819

*On/Off-Highway
All-Position Tire*

- Rugged four-rib design with special groove shape to combat stone retention for long mileage and retreadability.
- Tread compounded and constructed to resist cuts and impacts in on/off-highway service.
- Tread designed with variable-pitch noise treatment to help deliver a quiet ride, and help to improve durability and traction.
- Four steel belts and an all-steel casing ply for durability and improved retread performance.

Recommended Application

An all-position tire designed for steer, drive and trailer positions in on/off-highway service.

Replaces: Hankook: AM06
Yokohama: MY507, 501ZA

TECHNICAL DATA

| Tire Size | Load Range | Article Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|-------------|------------|----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| T819 | | | | | | | | | | | | | | | |
| 11R22.5 | H | 294-535 | 125 | 8.25 | 41.6 | 10.7 | 19.4 | 11.7 | 499 | 20 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 65 |
| 12R22.5 | H | 157-341 | 139 | 9.00 | 42.7 | 11.6 | 19.8 | 12.6 | 487 | 20 | 3350@830 | 7390@120 | 3075@830 | 6780@120 | 65 |
| 11R24.5 | H | 294-543 | 131 | 8.25 | 43.6 | 10.7 | 20.4 | 11.7 | 476 | 20 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 65 |
| 12R24.5 | H | 157-368 | 148 | 9.00 | 44.7 | 11.3 | 20.8 | 12.3 | 465 | 20 | 3550@830 | 7830@120 | 3250@830 | 7160@120 | 65 |
| 315/80R22.5 | L | 157-147 | 148 | 9.00 | 42.7 | 12.1 | 19.7 | 13.1 | 487 | 20 | 4125@900 | 9090@130 | 3750@900 | 8270@130 | 55 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



T831

On/Off-Highway Drive Tire

- Aggressive lug pattern for a strong grip.
- Extra-deep tread for long original mileage.
- Specially formulated on/off-highway tread compound helps resist chips, cuts, and tears.
- Stress-relief body ply contour helps to provides durability and retreadability.

Recommended Application

A drive tire recommended for use in on/off-highway service.

Replaces: BFGoodrich: DR675
Hankook: DM04
Yokohama: LY053

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|-------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| T831 | | | | | | | | | | | | | | | |
| 11R22.5 | H | 281-557 | 134 | 8.25 | 42.4 | 10.7 | 19.7 | 11.8 | 490 | 31 | 3000@830 | 6610@120 | 2725@830 | 6005@120 | 55 |
| 12R22.5 | H | 281-581 | 150 | 9.00 | 43.6 | 11.4 | 20.2 | 12.7 | 476 | 31 | 3350@830 | 7390@120 | 3075@830 | 6780@120 | 55 |
| 11R24.5 | H | 281-565 | 142 | 8.25 | 44.5 | 10.7 | 20.8 | 11.8 | 467 | 31 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 55 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FD835

*On/Off-Highway
Drive Tire*

- Extra-deep tread helps to extend original casing life.
- Block design with angled siping helps to provide aggressive traction for both on and off highway use.
- Tough tread compound helps resist cuts, chips, chunks, and tears.
- Split-belt construction provides extra flexibility and durability in severe-service applications.

Recommended Application

A drive tire recommended for use in severe on/off highway service, such as logging.

Replaces: Dunlop: SP 881
Yokohama: LY053

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|----------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FD835 | | | | | | | | | | | | | | | |
| 11R24.5 | H | 208-945 | 144 | 8.25 | 44.7 | 10.8 | 20.8 | 11.9 | 465 | 33 | 3250@830 | 7160@120 | 3000@830 | 6610@120 | 65 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



FS818

*On/Off-Highway
All-Position Wide Base Tire*

- Wide base design for higher payload and flotation so tires maintain grip and traction without digging into the ground.
- Four full-width steel belts combat tread squirm and enhance retreadability.
- Self-cleaning tread pattern provides high traction with stone rejector platforms in every groove for excellent durability.

Recommended Application

An all-position wide base tire recommended for steer, drive and trailer positions in on/off-highway service.

Replaces: BFGoodrich: ST565
Hankook: AM15

TECHNICAL DATA

| Tire Size | Load Range | Material Number | Weight (lbs.) | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Overall Width (Loaded) | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | | Max. Speed (MPH) |
|--------------|------------|-----------------|---------------|-----------|---------------|---------------|----------------------|------------------------|---------------|-------------------|-------------------------|----------|-----------------------|---------|------------------|
| | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI | |
| FS818 | | | | | | | | | | | | | | | |
| 385/65R22.5 | J | 247-780 | 172 | 12.25 | 42.9 | 15.1 | 19.8 | 16.6 | 484 | 23 | 9370@120 | 4250@830 | - | - | 68 |
| 425/65R22.5 | L | 241-235 | 194 | 12.25 | 44.8 | 16.1 | 20.6 | 17.7 | 463 | 23 | 11400@120 | 5150@830 | - | - | 68 |
| 445/65R22.5 | L | 247-797 | 214 | 13.00 | 46.0 | 17.5 | 21.1 | 19.2 | 452 | 24 | 12300@120 | 5600@830 | - | - | 68 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



SPECIAL TREAD COMPOUNDS

help resist cuts, chips, tearing and irregular wear

DEEP TREAD

for aggressive traction and long original mileage

FOUR STEEL BELTS



extend casing life while providing protection from cuts and punctures

FIRESTONE F SHIELD

identifies the location of the tread wear indicators within the tread

SIDEWALL PROTECTOR RIBS

helps fight cuts, snags and abrasions

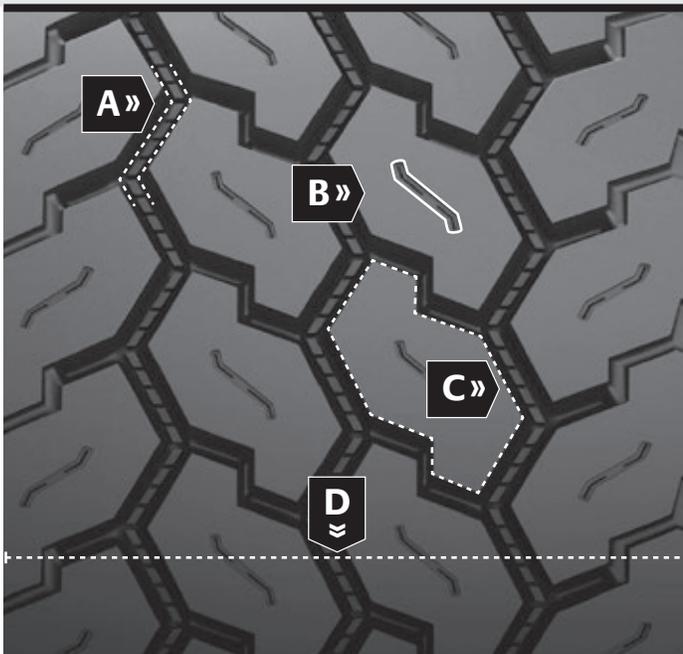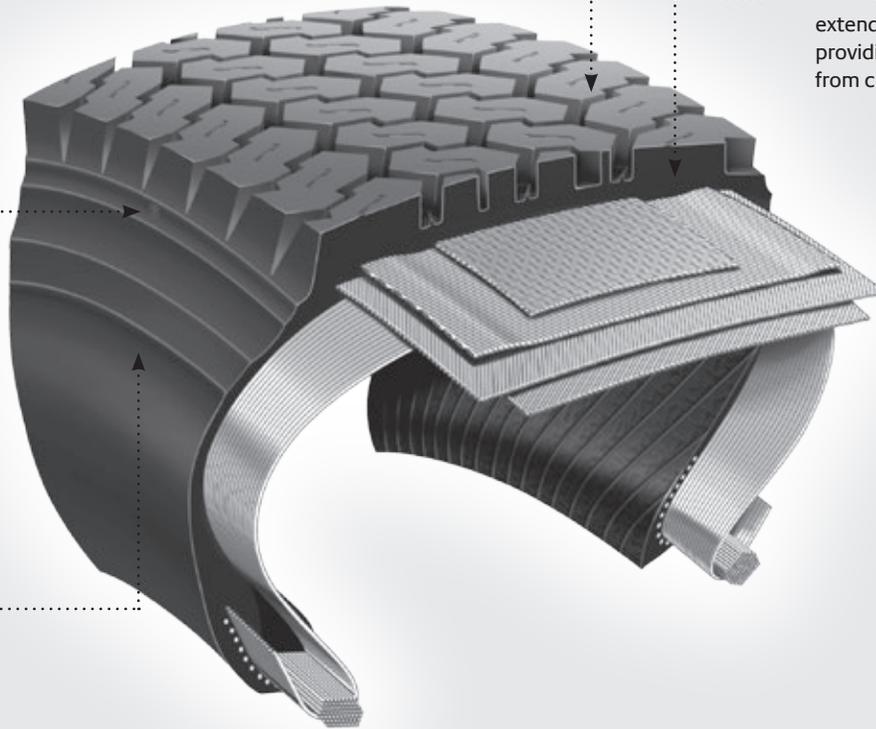

A STONE REJECTOR PLATFORMS

help to prevent stones from pushing deeper into tread grooves and piercing belt layer, damaging and exposing belts to moisture

B BLOCK SIPES

promote traction by slicing through water for a solid grip on wet roads

C BLOCK DESIGN AND EDGES

provide traction for both on and off highway use

D WIDE BASE DESIGN

for higher payload and outstanding flotation

Medium Truck Tire – Discontinued Products

| TIRE SPECIFICATIONS | | | | | | | | | | | |
|---------------------|---------------|------------|-----------------|----------------------|-----------|---------------|---------------|----------------------|--------------|---------------|-------------|
| Pattern | Size | Load Range | Material Number | Replace With | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Loaded Width | Revs Per Mile | Tread Depth |
| FS507 | 11R22.5 | G | 297-003 | FS591 | 8.25 | 41.3 | 10.6 | 19.0 | 11.6 | 503 | 19 |
| FS507 | 11R22.5 | H | 297-011 | FS591 | 8.25 | 41.3 | 10.6 | 19.0 | 11.6 | 503 | 19 |
| FS507 | 11R24.5 | G | 297-038 | FS591 | 8.25 | 43.4 | 10.7 | 20.0 | 11.8 | 479 | 19 |
| FS507 | 11R24.5 | H | 297-046 | FS591 | 8.25 | 43.4 | 10.7 | 20.0 | 11.8 | 479 | 19 |
| FS507 | 295/75R22.5 | G | 297-054 | FS591 | 8.25 | 40.2 | 10.7 | 19.0 | 11.8 | 517 | 19 |
| FS507 | 295/75R22.5 | H | 297-062 | FS591 | 8.25 | 40.2 | 10.7 | 19.0 | 11.8 | 517 | 19 |
| FS507 | 285/75R24.5 | G | 297-070 | FS591 | 8.25 | 41.4 | 10.7 | 19.0 | 11.7 | 502 | 19 |
| FS507 PLUS | 11R22.5 | G | 244-142 | FS591 | 8.25 | 41.3 | 10.6 | 19.3 | 11.6 | 503 | 19 |
| FS507 PLUS | 11R22.5 | H | 244-159 | FS591 | 8.25 | 41.3 | 10.6 | 19.3 | 11.6 | 503 | 19 |
| FS507 PLUS | 11R24.5 | G | 244-176 | FS591 | 8.25 | 43.4 | 10.7 | 20.3 | 11.8 | 478 | 19 |
| FS507 PLUS | 11R24.5 | H | 244-193 | FS591 | 8.25 | 43.4 | 10.7 | 20.3 | 11.8 | 478 | 19 |
| FS507 PLUS | 295/75R22.5 | G | 244-091 | FS591 | 8.25 | 40.2 | 10.7 | 18.8 | 11.8 | 517 | 19 |
| FS507 PLUS | 295/75R22.5 | H | 244-108 | FS591 | 8.25 | 40.2 | 10.7 | 18.8 | 11.8 | 517 | 19 |
| FS507 PLUS | 285/75R24.5 | G | 244-125 | FS591 | 8.25 | 41.4 | 10.7 | 19.4 | 11.7 | 502 | 19 |
| FD695 PLUS | 11R22.5 | G | 238-243 | FD691 | 8.25 | 41.9 | 11.3 | 19.5 | 12.4 | 496 | 26 |
| FS590 PLUS | 11R22.5 | G | 296-902 | FS591 | 8.25 | 41.3 | 10.8 | 19.2 | 11.8 | 503 | 18 |
| FS590 PLUS | 11R24.5 | G | 296-910 | FS591 | 8.25 | 43.3 | 10.8 | 20.2 | 11.8 | 480 | 18 |
| FS590 PLUS | 295/75R22.5 | G | 296-929 | FS591 | 8.25 | 40.1 | 10.8 | 18.7 | 11.8 | 518 | 18 |
| FS590 PLUS | 285/75R24.5 | G | 296-937 | FS591 | 8.25 | 41.3 | 10.7 | 19.4 | 11.8 | 503 | 18 |
| FS560 PLUS | 9R22.5 | F | 193-016 | FS561 | 6.75 | 38.4 | 8.9 | 18.0 | 9.8 | 542 | 17 |
| FS560 PLUS | 10R22.5 | F | 211-274 | FS561 | 7.50 | 40.1 | 9.8 | 18.7 | 10.8 | 518 | 18 |
| FS560 PLUS | 10R22.5 | G | 193-050 | FS561 | 7.50 | 40.1 | 9.8 | 18.7 | 10.8 | 518 | 18 |
| FS560 PLUS | 12R22.5 | H | 156-523 | FS561 | 9.00 | 42.7 | 11.6 | 19.8 | 12.6 | 487 | 19 |
| FS560 PLUS | 215/75R17.5 | H | 160-716 | FS561 | 6.00 | 32.2 | 8.5 | 15.3 | 9.4 | 647 | 16 |
| FS560 PLUS | 225/70R19.5 | F | 208-860 | - | 6.00 | 32.2 | 8.5 | 15.3 | 9.4 | 647 | 16 |
| FS560 PLUS | 245/70R19.5 * | F | 169-981 | - | 6.00 | 30.6 | 8.7 | 14.3 | 9.5 | 680 | 15 |
| FS560 PLUS | 245/70R19.5 * | G | 169-964 | - | 6.75 | 33.3 | 9.4 | 15.7 | 10.3 | 624 | 17 |
| FS560 PLUS | 225/70R19.5 | G | 227-057 | FS561 | 6.75 | 33.3 | 9.4 | 15.7 | 10.3 | 624 | 17 |
| FS560 PLUS | 275/70R22.5 | H | 192-999 | FS561 | 8.25 | 38.0 | 10.8 | 17.6 | 11.8 | 547 | 18 |
| FS561 PLUS | 255/70R22.5 | H | 248-528 | - | 8.25 | 36.8 | 10.4 | 17.3 | 11.4 | 565 | 21 |
| FD695 PLUS | 11R24.5 | G | 238-277 | FD691 | 8.25 | 43.7 | 11.2 | 20.4 | 12.3 | 475 | 26 |
| FD695 PLUS | 295/75R22.5 | G | 238-209 | FD691 | 8.25 | 40.6 | 11.3 | 19.5 | 11.8 | 512 | 26 |
| FD695 PLUS | 285/75R24.5 | G | 238-226 | FD691 | 8.25 | 41.8 | 11.3 | 19.6 | 12.4 | 497 | 26 |
| FD690 PLUS | 11R22.5 | G | 158-676 | FD690 PLUS | 8.25 | 42.1 | 10.8 | 19.6 | 11.8 | 493 | 29 |
| FD690 PLUS | 11R24.5 | G | 159-135 | FD690 PLUS | 8.25 | 44.0 | 10.7 | 20.5 | 11.8 | 472 | 29 |
| FD690 PLUS | 245/70R19.5 | G | 186-692 | FD690 PLUS (006-510) | 6.75 | 33.5 | 9.1 | 15.5 | 10.0 | 620 | 20 |
| FD690 PLUS | 295/75R22.5 | G | 159-067 | FD690 PLUS | 8.25 | 41.0 | 11.1 | 19.1 | 12.2 | 507 | 29 |
| FD690 PLUS | 285/75R24.5 | G | 159-084 | FD690 PLUS | 8.25 | 42.2 | 10.9 | 19.8 | 11.9 | 492 | 29 |

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.

Medium Truck Tire – Discontinued Products

TIRE SPECIFICATIONS

| Pattern | Size | Load Range | Material Number | Replace With | Meas. Rim | Overall Diam. | Overall Width | Static Loaded Radius | Loaded Width | Revs Per Mile | Tread Depth |
|-------------------|--------------|------------|-----------------|------------------------|-----------|---------------|---------------|----------------------|--------------|---------------|-------------|
| FS400 | 315/80R22.5† | L | 240-623 | FS400 (004-168) | 9.00 | 42.4 | 12.4 | 19.7 | 13.9 | 490 | 18 |
| FT491 | 11R22.5 | G | 238-668 | FT491 | 8.25 | 40.9 | 11.3 | 19.1 | 12.5 | 507 | 11 |
| FT491 | 11R24.5 | G | 238-685 | FT491 | 8.25 | 42.9 | 11.4 | 20.1 | 12.5 | 485 | 11 |
| FT491 | 255/70R22.5 | H | 238-702 | FT491 | 8.25 | 36.3 | 10.4 | 17.1 | 11.5 | 572 | 11 |
| FT491 | 295/75R22.5 | G | 238-617 | FT491 | 8.25 | 39.7 | 11.3 | 18.6 | 12.5 | 523 | 11 |
| FT491 | 285/75R24.5 | G | 238-634 | FT491 | 8.25 | 41.0 | 11.3 | 19.3 | 12.4 | 507 | 11 |
| FT455 | 11R22.5 | G | 297-089 | FT491 | 8.25 | 41.0 | 10.6 | 19.1 | 11.7 | 507 | 12 |
| FT455 | 11R24.5 | G | 297-097 | FT491 | 8.25 | 43.0 | 10.6 | 20.1 | 11.7 | 483 | 12 |
| FT455 | 255/70R22.5 | H | 183-836 | FT491 | 8.25 | 36.3 | 10.3 | 17.0 | 11.4 | 572 | 12 |
| FT455 | 295/75R22.5 | G | 297-100 | FT491 | 8.25 | 39.8 | 10.7 | 18.6 | 11.8 | 522 | 12 |
| FT455 | 285/75R24.5 | G | 297-119 | FT491 | 8.25 | 41.2 | 10.6 | 19.3 | 11.6 | 504 | 12 |
| FT455 PLUS | 11R22.5 | G | 235-353 | FT491 | 8.25 | 41.0 | 10.6 | 19.1 | 11.7 | 507 | 12 |
| FT455 PLUS | 11R24.5 | G | 235-370 | FT491 | 8.25 | 43.0 | 10.6 | 20.1 | 11.7 | 483 | 12 |
| FT455 PLUS | 255/70R22.5 | H | 235-387 | FT491 | 8.25 | 36.3 | 10.3 | 17.0 | 11.4 | 572 | 12 |
| FT455 PLUS | 295/75R22.5 | G | 235-319 | FT491 | 8.25 | 39.8 | 10.7 | 18.6 | 11.8 | 522 | 12 |
| FT455 PLUS | 285/75R24.5 | G | 235-336 | FT491 | 8.25 | 41.2 | 10.6 | 19.3 | 11.6 | 504 | 12 |
| T559 | 9.00R20 | F | 290-440 | FS560 PLUS | 7.00 | 39.8 | 9.8 | 18.6 | 11.0 | 522 | 15 |
| T559 | 10.00R20 | G | 290-459 | FS560 PLUS | 7.50 | 41.6 | 10.6 | 19.3 | 11.8 | 499 | 16 |
| T559 | 9R22.5 | F | 290-467 | FS560 PLUS | 6.75 | 38.2 | 8.9 | 17.9 | 9.8 | 544 | 15 |
| T559 | 10R22.5 | F | 290-475 | FS560 PLUS | 7.50 | 39.8 | 9.8 | 18.6 | 10.8 | 521 | 15 |
| T559 | 10R22.5 | G | 290-483 | FS560 PLUS | 7.50 | 39.8 | 9.8 | 18.6 | 10.8 | 521 | 15 |
| T559 | 11R22.5 | G | 290-491 | FS560 PLUS | 8.25 | 41.2 | 10.8 | 19.2 | 11.9 | 504 | 16 |
| T559 | 11R22.5 | H | 290-505 | FS560 PLUS | 8.25 | 41.2 | 10.8 | 19.2 | 11.9 | 504 | 16 |
| T559 | 11R24.5 | G | 290-513 | FS560 PLUS | 8.25 | 43.2 | 10.8 | 20.2 | 11.9 | 481 | 16 |
| T559 | 11R24.5 | H | 290-521 | FS560 PLUS | 8.25 | 43.2 | 10.8 | 20.2 | 11.9 | 481 | 16 |
| T575 | 255/70R22.5 | H | 287-415 | FS560 PLUS | 7.50 | 36.7 | 9.9 | 17.3 | 10.9 | 566 | 18 |
| T546 | 9.00R20 | G | 294-748 | - | 7.00 | 40.3 | 10.1 | 18.8 | 11.2 | 515 | 25 |
| T546 | 10.00R20 | H | 294-721 | - | 7.50 | 41.5 | 10.8 | 19.3 | 11.9 | 501 | 26 |
| T819 | 10.00R20 | H | 294-497 | - | 7.50 | 41.5 | 10.6 | 19.3 | 11.6 | 501 | 20 |
| T819 | 11.00R20 | H | 294-500 | - | 8.00 | 42.6 | 11.5 | 19.8 | 12.5 | 486 | 20 |
| T819 | 12.00R20 | J | 294-519 | - | 8.50 | 44.8 | 12.3 | 20.7 | 13.4 | 464 | 21 |
| T819 | 11.00R22 | H | 294-527 | - | 8.00 | 44.7 | 11.4 | 20.8 | 12.5 | 465 | 20 |
| T831 | 10.00R20 | H | 281-549 | - | 7.50 | 42.3 | 10.8 | 19.7 | 11.8 | 491 | 31 |
| T831 | 11.00R20 | H | 281-573 | - | 8.00 | 43.5 | 11.4 | 20.2 | 12.5 | 478 | 31 |
| T839 | 385/65R22.5 | J | 294-586 | | 11.75 | 42.5 | 15.2 | 19.7 | 16.6 | 492 | 17 |
| T839 | 425/65R22.5 | L | 294-594 | | 12.25 | 44.5 | 16.3 | 20.5 | 17.7 | 470 | 18 |
| T839 | 445/65R22.5 | L | 294-608 | | 13.00 | 45.7 | 17.4 | 21.0 | 19.0 | 458 | 18 |

† 315/80R22.5 requires the use of a 9.00 rim to carry over 8000 lb.

- All dimensions taken with tire on measuring rim.
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 61 through 65.
- For minimum dual spacing and approved rim widths see page 44.
- For ply ratings see table on page 42.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.

Commercial Light Truck Tires

| | |
|--|----|
| Light Truck Tire Size & Availability Chart | 26 |
| Transforce HT | 27 |
| Transforce AT² | 28 |
| <i>Commercial Light Truck Tire – Discontinued Products</i> | 29 |

Light Truck Tire Size & Availability Chart

| LOAD RANGE AND TREAD DEPTHS IN 32NDS INDICATE AVAILABILITY | | |
|---|------------------|----------------------------|
| FIRESTONE | TRANSFORCE HT | TRANSFORCE AT ² |
| PAGE | 25 | 26 |
| REPLACES BFGOODRICH | T/A All Season | T/A Traction |
| REPLACES GOODYEAR | Wrangler SR-A | Wrangler Silent Armor |
| SIZE | LOAD-TREAD DEPTH | |
| LT235/75R15 | C-15 | C-17 |
| 205/65R15C | C-14 | |
| 235/65R16C | E-13 | |
| 195/75R16C | D-12 | |
| LT225/75R16 | E-14 | E-16 |
| LT245/75R16 | E-14 | E-16 |
| LT265/75R16 | E-15 | E-18 |
| LT215/85R16 | E-14 | E-16 |
| LT235/85R16 | E-14 | E-17 |
| 8.75R16.5LT | E-14 | |
| 9.50R16.5LT | E-15 | |
| LT245/70R17 | E-14 | C-16 |
| LT265/70R17 | E-14 | E-17 |
| LT225/75R17 | E-17 | E-17 |
| LT245/75R17 | E-14 | E-17 |
| LT265/75R17 | E-15 | E-17 |
| LT235/80R17 | E-15 | E-17 |
| LT265/70R18 | E-15 | E-15 |
| LT275/65R18 | E-15 | E-16 |
| LT275/70R18 | E-14 | E-16 |
| LT285/60R20 | | E-16 |



Transforce HT

- UNI-T technology for outstanding wet performance and a smooth, quiet ride.
- Advanced high-resilience tread compound helps slow wear and chip/tear resistance.
- Deep shoulder slots provide better traction in rain, snow and dry conditions.
- Circumferential grooves provide effective water evacuation.

Replaces: BF Goodrich: T/A All Season
Goodyear: Wrangler SR-A



The Ultimate Network of Intelligent Tire Technology is a combination of advanced tire technologies that deliver outstanding comfort and control, precise handling, long wear, increased fuel efficiency, reduced noise, and a smooth, quiet ride.

TECHNICAL DATA

| SW Style | Tire Size | Load Range | Service Description | Material Number | Wt. (lbs.) | Measuring Rim | Overall Diam. | Overall Width | Static Loaded Radius | Min. Dual Spac. | Revs Per Mile | Tread Depth (32') | Max. Tire Load (Single) | | Max. Tire Load (Dual) | |
|----------------------|-------------|------------|---------------------|-----------------|------------|------------------|---------------|---------------|----------------------|-----------------|---------------|-------------------|-------------------------|---------|-----------------------|---------|
| | | | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI |
| Transforce HT | | | | | | | | | | | | | | | | |
| BL | LT235/75R15 | C | 104/101R | 189-837 | 32 | (6.5) 6.0-7.0 | 28.9 | 9.3 | 12.8 | 10.8 | 721 | 15 | 900@350 | 1985@50 | 825@350 | 1820@50 |
| BL | 205/65R15C | C | 102/100T | 002-028 | 29 | (6.0) 5.5-6.5 | 25.5 | 8.2 | 11.6 | 9.4 | 817 | 14 | 850@375 | 1874@54 | 800@375 | 1764@54 |
| BL | LT215/85R16 | E | 115/112R | 189-701 | 35 | (6.0) 5.5-7.0 | 30.4 | 8.5 | 13.5 | 9.9 | 685 | 14 | 1215@550 | 2680@80 | 1120@550 | 2470@80 |
| BL | LT235/85R16 | E | 120/116R | 189-718 | 40 | (6.5) 6.0-7.5 | 31.7 | 9.3 | 14.0 | 10.8 | 657 | 14 | 1380@550 | 3042@80 | 1260@550 | 2778@80 |
| BL | 195/75R16C | D | 107/105R | 003-560 | 24 | (5.5) 5.0-6.0 | 27.5 | 7.7 | 12.4 | 8.9 | 758 | 12 | 975@475 | 2149@69 | 925@475 | 2039@69 |
| BL | LT225/75R16 | E | 115/112R | 189-752 | 35 | (6.0) 6.0-7.0 | 29.3 | 8.8 | 13.1 | 10.2 | 711 | 14 | 1215@550 | 2680@80 | 1120@550 | 2470@80 |
| BL | LT245/75R16 | E | 120/116R | 189-769 | 38 | (7.0) 6.5-8.0 | 30.5 | 9.8 | 13.5 | 11.3 | 684 | 14 | 1380@550 | 3042@80 | 1260@550 | 2778@80 |
| OWL | LT265/75R16 | E | 123/120R | 207-602 | 44 | (7.5) 7.0-8.0 | 31.7 | 10.5 | 14.0 | 12.2 | 657 | 15 | 1550@550 | 3415@80 | 1400@550 | 3085@80 |
| BL | LT265/75R16 | E | 123/120R | 189-786 | 44 | (7.5) 7.0-8.0 | 31.7 | 10.5 | 14.0 | 12.2 | 657 | 15 | 1550@550 | 3415@80 | 1400@550 | 3085@80 |
| BL | 235/65R16C | E | 121/119R | 003-561 | 34 | (7.0) 6.5-8.5 | 28.0 | 9.5 | 12.7 | 10.9 | 743 | 13 | 1450@575 | 3197@83 | 1360@575 | 2998@83 |
| BL | 8.75R16.5LT | E | 115/111R | 189-803 | 35 | (6.75) 6.0-6.75 | 29.5 | 8.8 | 13.2 | 9.9 | 706 | 15 | 1215@550 | 2680@80 | 1090@550 | 2405@80 |
| BL | 9.50R16.5LT | E | 121/117R | 189-820 | 40 | (6.75) 6.75-8.25 | 30.6 | 9.5 | 13.6 | 10.7 | 681 | 15 | 1415@550 | 3195@80 | 1285@550 | 2835@80 |
| BL | LT235/80R17 | E | 120/117R | 191-282 | 41 | (6.5) 6.0-7.5 | 31.8 | 9.3 | 14.2 | 10.8 | 655 | 14 | 1400@550 | 3085@80 | 1285@550 | 2835@80 |
| BL | LT225/75R17 | E | 116/113R | 224-133 | 37 | (6.0) 6.0-7.5 | 30.3 | 8.8 | 13.6 | 10.2 | 687 | 14 | 1250@550 | 2755@80 | 1150@550 | 2535@80 |
| BL | LT245/75R17 | E | 121R | 225-425 | 42 | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 11.3 | 661 | 12 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BL | LT245/75R17 | E | 121/118R | 233-007 | 42 | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 11.3 | 661 | 13 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BL | LT245/75R17 | E | 121/118R | 003-490 | 42 | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 11.3 | 661 | 13 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| OWL | LT245/75R17 | E | 121/118R | 207-483 | 42 | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 11.3 | 661 | 13 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BL | LT245/70R17 | E | 119/116R | 232-990 | 41 | (7.0) 6.5-8.0 | 30.6 | 9.8 | 13.7 | 11.3 | 681 | 14 | 1360@550 | 3000@80 | 1250@550 | 2755@80 |
| BL | LT245/70R17 | E | 119/116R | 191-316 | 41 | (7.0) 6.5-8.0 | 30.6 | 9.8 | 13.7 | 11.3 | 681 | 14 | 1360@550 | 3000@80 | 1250@550 | 2755@80 |
| OWL | LT265/70R17 | E | 121/118R | 200-156 | 46 | (8.0) 7.0-8.5 | 31.7 | 10.7 | 14.7 | 12.4 | 657 | 14 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| OWL | LT265/70R18 | E | 124/121R | 000-011 | 50 | (8.0) 7.0-9.0 | 32.6 | 10.7 | 14.6 | 12.4 | 638 | 15 | 1599@550 | 3525@80 | 1449@550 | 3195@80 |
| OWL | LT275/70R18 | E | 125/122R | 207-500 | 50 | (8.0) 7.0-8.5 | 33.2 | 11 | 14.8 | 12.8 | 627 | 15 | 1650@550 | 3640@80 | 1500@550 | 3305@80 |
| BL | LT275/70R18 | E | 125/122S | 250-109 | 50 | (8.0) 7.0-8.5 | 33.2 | 11 | 14.8 | 12.8 | 608 | 16 | 1650@550 | 3640@80 | 1500@550 | 3305@80 |
| OWL | LT275/65R18 | E | 123/120S | 207-619 | 50 | (8.0) 7.5-9.0 | 32.1 | 11 | 14.5 | 12.8 | 649 | 17 | 1550@550 | 3415@80 | 1400@550 | 3085@80 |

- All dimensions taken with tire on measuring rim (in parenthesis above).
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 66 through 69.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.



Transforce AT²

- Built with a chip and tear resistant compound — tough enough to deal with rough road conditions.
- Deeper tread features improve traction in rain, snow and dry conditions.
- Pattern features combined with an innovative tread-to-road contact footprint help performance for longer tire life.
- High ratings on wet and off-road performance.

Replaces: BF Goodrich: T/A Traction
Goodyear: Wrangler Silent Armor

TECHNICAL DATA

| SW Style | Tire Size | Load Range | Service Description | Material Number | Wt. (lbs.) | Measuring Rim | Overall Diam. | Overall Width | Static Loaded Radius | Min. Dual Spac. | Revs Per Mile | Tread Depth (32") | Max. Tire Load (Single) | | Max. Tire Load (Dual) | |
|----------------------------------|-------------|------------|---------------------|-----------------|------------|---------------|---------------|---------------|----------------------|-----------------|---------------|-------------------|-------------------------|---------|-----------------------|---------|
| | | | | | | | | | | | | | Kg/kPa | Lbs/PSI | Kg/kPa | Lbs/PSI |
| Transforce AT² | | | | | | | | | | | | | | | | |
| BW | LT215/85R16 | E | 115R | 000-178 | 36 | (6.0) 5.5-7.0 | 30.4 | 8.5 | 13.5 | 9.9 | 685 | 16 | 1215@550 | 2680@80 | 1120@550 | 2470@80 |
| BW | LT225/75R16 | E | 115R | 000-180 | 36 | (6.0) 6.0-7.0 | 29.3 | 8.8 | 13.1 | 10.2 | 711 | 16 | 1215@550 | 2680@80 | 1120@550 | 2470@80 |
| BW | LT235/85R16 | E | 120R | 000-179 | 41 | (6.5) 6.0-7.5 | 31.7 | 9.3 | 14.0 | 10.8 | 656 | 17 | 1380@550 | 3042@80 | 1250@550 | 2755@80 |
| BW | LT245/75R16 | E | 120R | 000-181 | 41 | (7.0) 6.5-8.0 | 30.5 | 9.8 | 13.5 | 11.3 | 684 | 17 | 1380@550 | 3042@80 | 1250@550 | 2755@80 |
| BW | LT265/75R16 | E | 123R | 000-182 | 43 | (7.5) 7.0-8.0 | 31.7 | 10.5 | 14.0 | 12.2 | 658 | 17 | 1550@550 | 3415@80 | 1400@550 | 3085@80 |
| BW | LT225/75R17 | E | 116R | 000-183 | 37 | (6.0) 6.0-7.5 | 30.3 | 8.8 | 13.6 | 10.2 | 687 | 16 | 1250@550 | 2755@80 | 1150@550 | 2535@80 |
| BW | LT235/80R17 | E | 120R | 000-185 | 41 | (6.5) 6.0-7.5 | 31.8 | 9.3 | 14.2 | 10.8 | 655 | 17 | 1400@550 | 3085@80 | 1285@550 | 2755@80 |
| BW | LT245/70R17 | E | 119R | 000-186 | 41 | (7.0) 6.5-8.0 | 30.6 | 9.8 | 13.7 | 11.3 | 682 | 17 | 1360@550 | 3000@80 | 1250@550 | 2755@80 |
| OWL | LT245/75R17 | E | 121R | 000-184 | 43 | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 11.3 | 661 | 17 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| OWL | LT265/70R17 | E | 121R | 000-187 | 45 | (8.0) 7.0-8.5 | 31.7 | 10.7 | 14.1 | 12.4 | 658 | 17 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BW | LT285/70R17 | E | 121R | 000-780 | 33 | (8.5) 7.5-9.0 | 32.8 | 11.5 | 14.5 | 13.4 | 636 | 18 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BW | LT265/70R18 | E | 124R | 000-188 | 49 | (8.0) 7.0-9.0 | 32.6 | 10.7 | 14.6 | 12.4 | 638 | 17 | 1600@550 | 3525@80 | 1450@550 | 3195@80 |
| OWL | LT275/65R18 | E | 123R | 000-190 | 50 | (8.0) 7.5-9.0 | 32.1 | 11.0 | 14.5 | 12.8 | 649 | 16 | 1550@550 | 3415@80 | 1400@550 | 3085@80 |
| OWL | LT275/70R18 | E | 125R | 000-189 | 53 | (8.0) 7.0-8.5 | 33.2 | 11.0 | 14.8 | 12.8 | 628 | 18 | 1650@550 | 3640@80 | 1500@550 | 3305@80 |
| BW | LT265/60R20 | E | 121R | 000-192 | 46 | (8.0) 7.5-9.5 | 32.5 | 10.7 | 14.9 | 12.4 | 641 | 15 | 1450@550 | 3195@80 | 1320@550 | 2910@80 |
| BW | LT275/65R20 | E | 126R | 000-191 | 51 | (8.0) 7.5-9.5 | 34.1 | 11.0 | 15.5 | 12.8 | 611 | 16 | 1700@550 | 3750@80 | 1550@550 | 3415@80 |

- All dimensions taken with tire on measuring rim (in parenthesis above).
- Loaded dimensions and RPM measured at maximum dual load.
- For load and inflation tables see pages 66 through 69.

Firestone tires and tubes are subject to an ongoing development program. Bridgestone Americas Tire Operations, LLC retains the right to amend specifications at any time without notice or obligations. Please refer to rim manufacturer's load and inflation limits. Never exceed rim manufacturer's limits without the consent of the component manufacturer.

Commercial Light Truck — Discontinued Products

TIRE SPECIFICATIONS

| Pattern | Size | Load Range | Measuring Rims | Overall Diameter | Overall Width | Static Loaded Radius | Revs Per Mile | Min. Duel Spacing | Tread Depth (32") |
|---------------------|----------------|------------|----------------|------------------|---------------|----------------------|---------------|-------------------|-------------------|
| Steeltex R4S | 7.00R15LT | D | 5.50 | 29.6 | 8.0 | 13.7 | 704 | 9.0 | 13 |
| Steeltex R4S | 8.75R16.5LT | D/E | 6.75 | 29.5 | 8.8 | 13.8 | 706 | 9.9 | 14 |
| Steeltex R4S | 9.50R16.5LT | D/E | 6.75 | 30.6 | 9.5 | 14.2 | 681 | 10.7 | 14 |
| Steeltex R4S | LT215/85R16 | D/E | 6.00 | 30.4 | 8.5 | 13.5 | 685 | 9.9 | 13 |
| Steeltex R4S | LT235/85R16 | D | 6.50 | 31.7 | 9.3 | 14.0 | 657 | 10.8 | 14 |
| Steeltex R4S | LT225/75R16 | C/D/E | 6.00 | 29.3 | 8.8 | 13.1 | 711 | 10.2 | 13 |
| Steeltex R4S | LT245/75R16 | C/E | 7.00 | 30.5 | 9.8 | 13.6 | 683 | 11.3 | 14 |
| Steeltex R4S | LT265/75R16 II | D | 7.50 | 31.7 | 10.5 | 14.0 | 657 | 12.2 | 14 |
| Steeltex R4S | LT215/75R15 | C | 6.00 | 27.7 | 8.5 | 12.4 | 752 | 9.9 | 13 |
| Steeltex R4S | LT235/75R15 | C | 6.50 | 28.9 | 9.3 | 12.8 | 721 | 10.8 | 12 |
| Steeltex R4S | LT225/75R16 II | E | 6.00 | 29.3 | 8.8 | 13.1 | 711 | 10.2 | 13 |
| Steeltex R4S | LT245/75R16 II | E | 7.00 | 30.5 | 9.8 | 13.6 | 683 | 11.3 | 14 |
| Steeltex R4S | 7.50R16LT | D | 6.00 | 31.8 | 8.7 | 14.7 | 655 | 10.0 | 13 |
| Steeltex R4S | 8.00R16.5LT | D | 6.00 | 28.3 | 8.0 | 13.3 | 736 | 9.0 | 13 |
| Steeltex A/T | 7.50R16LT | D | 6.00 | 31.8 | 8.7 | 14.7 | 655 | 10.0 | 17 |
| Steeltex A/T | LT245/75R16 | C/E | 7.00 | 30.5 | 9.8 | 13.6 | 683 | 11.3 | 14/16 |
| Steeltex A/T | LT265/75R16 | D/E | 7.50 | 31.7 | 10.5 | 14.0 | 657 | 12.2 | 18 |
| Steeltex A/T | LT235/85R16 | D | 6.50 | 31.7 | 9.3 | 14.0 | 657 | 10.8 | 17 |
| Steeltex A/T | 8.00R16.5LT | D | 6.00 | 28.3 | 8.0 | 13.3 | 736 | 9.0 | 17 |
| Steeltex A/T | 8.75R16.5LT | D/E | 6.75 | 29.5 | 8.8 | 13.8 | 706 | 9.9 | 17 |
| Steeltex A/T | 9.50R16.5LT | D/E | 6.75 | 30.6 | 9.5 | 14.2 | 681 | 10.7 | 18 |
| Steeltex A/T | LT235/75R15 | C | 6.50 | 28.9 | 9.3 | 12.8 | 721 | 10.8 | 17 |
| Steeltex A/T | LT225/75R16 | D | 6.00 | 29.3 | 8.8 | 13.1 | 711 | 10.2 | 17 |
| Steeltex A/T | LT215/85R16 | D | 6.00 | 30.4 | 8.5 | 13.5 | 685 | 9.9 | 17 |
| Steeltex 23° SPS | LT235/75R15 | C | 6.50 | 28.9 | 9.3 | 12.8 | 721 | 10.8 | 17 |
| Steeltex 23° SPS | LT225/75R16 | D | 6.00 | 29.3 | 8.8 | 13.1 | 711 | 10.2 | 16 |
| Steeltex 23° SPS | LT245/75R16 | E | 7.00 | 30.5 | 9.8 | 13.6 | 683 | 11.3 | 17 |
| Steeltex 23° SPS | LT215/85R16 | D | 6.00 | 30.4 | 8.5 | 13.5 | 685 | 9.9 | 17 |
| Steeltex 23° SPS | LT235/85R16 | E | 6.50 | 31.7 | 9.3 | 14.0 | 657 | 10.8 | 17 |
| Steeltex 23° SPS | 9.50R16.5LT | D | 6.75 | 30.6 | 9.5 | 14.2 | 681 | 10.7 | 17 |
| Transforce HT | LT215/85R16 | D | 6.0 | 30.4 | 8.5 | 14.1 | 686 | 9.9 | 14 |
| Transforce HT | LT225/75R16 | D | 6.0 | 29.3 | 8.8 | 13.6 | 712 | 10.2 | 14 |
| Transforce HT | LT235/75R17 | E | 6.50 | 31.8 | 9.3 | 14.8 | 656 | 10.8 | 15 |
| Transforce AT | LT225/75R16 | D | 6.0 | 29.5 | 8.8 | 13.8 | 706 | 10.2 | 16 |
| Transforce AT | LT275/65R18 | E | 8.0 | 32.1 | 10.9 | 14.9 | 651 | 12.8 | 17 |
| Transforce AT / BL | LT235/75R15 | C | (6.5) 6.0-7.0 | 28.9 | 9.3 | 12.8 | 716 | 10.8 | 17 |
| Transforce AT / BL | LT215/85R16 | E | (6.0) 5.5-7.0 | 30.4 | 8.5 | 13.5 | 681 | 9.9 | 17 |
| Transforce AT / BL | LT235/85R16 | E | (6.5) 6.0-7.5 | 31.7 | 9.3 | 14.0 | 651 | 10.8 | 16 |
| Transforce AT / BL | LT225/75R16 | E | (6.0) 6.0-7.0 | 29.3 | 8.8 | 13.1 | 706 | 10.2 | 16 |
| Transforce AT / BL | LT245/75R16 | E | (7.0) 6.5-8.0 | 30.5 | 9.8 | 13.5 | 679 | 11.3 | 16 |
| Transforce AT / BL | LT265/75R16 | E | (7.5) 7.0-8.0 | 31.7 | 10.5 | 14.0 | 653 | 12.2 | 17 |
| Transforce AT / OWL | LT265/75R16 | E | (7.5) 7.0-8.0 | 31.7 | 10.5 | 14.0 | 653 | 12.2 | 18 |
| Transforce AT / BL | LT235/80R17 | E | (6.5) 6.0-7.5 | 31.8 | 9.3 | 14.2 | 655 | 10.8 | 17 |
| Transforce AT / BL | LT225/75R17 | E | (6.0) 6.0-7.5 | 30.3 | 8.8 | 13.6 | 681 | 10.2 | 17 |
| Transforce AT / OWL | LT245/75R17 | E | (7.0) 6.5-7.5 | 31.5 | 9.8 | 14.1 | 661 | 11.3 | 17 |
| Transforce AT / BL | LT245/70R17 | C | (7.0) 6.5-8.0 | 30.6 | 9.8 | 13.7 | 676 | 11.3 | 16 |
| Transforce AT / BL | LT245/70R17 | E | (7.0) 6.5-8.0 | 30.6 | 9.8 | 13.7 | 676 | 11.3 | 17 |
| Transforce AT / BL | LT265/70R17 | E | (8.0) 7.0-8.5 | 31.7 | 10.7 | 14.1 | 658 | 12.4 | 17 |
| Transforce AT / OWL | LT265/70R17 | E | (8.0) 7.0-8.5 | 31.7 | 10.7 | 14.7 | 653 | 12.4 | 18 |
| Transforce AT / OWL | LT275/70R18 | E | (8.0) 7.0-8.5 | 33.2 | 11 | 14.8 | 627 | 12.8 | 16 |
| Transforce AT / OWL | LT275/70R18 | E | (8.0) 7.0-8.5 | 33.2 | 11 | 14.8 | 627 | 12.8 | 15 |
| Transforce AT / OWL | LT275/65R18 | E | (8.0) 7.5-9.0 | 32.1 | 11 | 14.5 | 649 | 12.8 | 13 |
| Transforce AT / OWL | LT285/60R20 | E | (8.5) 8.0-10.0 | 33.5 | 11.5 | 15.2 | 603 | 13.4 | 16 |


General Technical Information

| | |
|---|---------|
| Adjustment Treadwear Chart | 32 |
| Truck Tire Limited Warranty | 33 - 40 |
| Commercial Tire Tubes, Valves & Flaps | 41 |
| Radial & Bias Tire Construction..... | 41 |
| Definitions | 42 - 43 |
| Ply Rating/Load Range..... | 44 |
| Speed Symbol | 44 |
| International Load Index Numbers..... | 44 |
| Inflation Pressure | 45 |
| Tire Mixing | 45 |
| Dual Matching..... | 45 |
| Medium Truck Tire Approved Rim Width & Minimum Dual Spacing..... | 46 |
| Tire Rotation | 47 |
| Regrooving..... | 47 |
| Branding..... | 47 |
| Wheel Alignment | 48 |
| Balance/Runout..... | 49 - 50 |
| Tire Mounting for Low Vibration | 50 - 51 |
| Storage | 52 |
| Tire Inspection..... | 52 |
| Irregular Wear of Radial Truck Tires..... | 53 |
| Low Profile Tires | 53 |
| Mounting/Demounting Procedures..... | 54 - 55 |
| Tire Vibration..... | 56 |
| Repair & Retreading..... | 56 |
| Large Truck Fuel Economy | 57 - 61 |
| Truck Type by Weight Class | 62 |

Adjustment Treadwear Chart

ORIGINAL TREAD DEPTH

| REMAINING TREAD DEPTH | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | REMAINING TREAD DEPTH |
|-----------------------|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----------------------|
| | Percentage of Usable Tread Wear Charges to the Customer | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2/32 | 100% | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 100 | 2/32 |
| 3/32 | 86% | 88 | 89 | 90 | 91 | 92 | 92 | 93 | 93 | 94 | 94 | 94 | 95 | 95 | 95 | 95 | 96 | 96 | 96 | 96 | 96 | 96 | 97 | 97 | 97 | 97 | 3/32 |
| 4/32 | 71% | 75 | 78 | 80 | 82 | 83 | 85 | 86 | 87 | 88 | 88 | 89 | 89 | 90 | 90 | 91 | 91 | 92 | 92 | 92 | 93 | 93 | 93 | 93 | 94 | 94 | 4/32 |
| 5/32 | 57% | 63 | 67 | 70 | 73 | 75 | 77 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 86 | 87 | 88 | 88 | 88 | 89 | 89 | 90 | 90 | 90 | 91 | 5/32 |
| 6/32 | 43% | 50 | 58 | 60 | 64 | 67 | 69 | 71 | 73 | 75 | 76 | 78 | 79 | 80 | 81 | 82 | 83 | 83 | 84 | 85 | 85 | 86 | 86 | 87 | 87 | 88 | 6/32 |
| 7/32 | 29% | 38 | 44 | 50 | 55 | 58 | 62 | 64 | 67 | 69 | 71 | 72 | 73 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 81 | 82 | 83 | 83 | 84 | 84 | 7/32 |
| 8/32 | 14% | 25 | 33 | 40 | 45 | 50 | 54 | 57 | 60 | 63 | 65 | 67 | 68 | 70 | 71 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 79 | 80 | 81 | 81 | 8/32 |
| 9/32 | 0% | 13 | 22 | 30 | 36 | 42 | 46 | 50 | 53 | 56 | 59 | 61 | 63 | 65 | 67 | 68 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 77 | 78 | 9/32 |
| 10/32 | | 0 | 11 | 20 | 27 | 33 | 38 | 43 | 47 | 50 | 53 | 56 | 58 | 60 | 62 | 64 | 65 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 10/32 |
| 11/32 | | | 0 | 10 | 18 | 25 | 31 | 36 | 40 | 44 | 47 | 50 | 53 | 55 | 57 | 59 | 61 | 63 | 64 | 65 | 67 | 68 | 69 | 70 | 71 | 72 | 11/32 |
| 12/32 | | | | 0 | 9 | 17 | 23 | 25 | 33 | 38 | 41 | 44 | 47 | 50 | 52 | 55 | 57 | 58 | 60 | 62 | 63 | 64 | 66 | 67 | 68 | 69 | 12/32 |
| 13/32 | | | | | 0 | 8 | 15 | 21 | 29 | 31 | 35 | 39 | 42 | 45 | 48 | 50 | 52 | 54 | 56 | 58 | 59 | 61 | 62 | 63 | 65 | 66 | 13/32 |
| 14/32 | | | | | | 0 | 8 | 14 | 20 | 25 | 29 | 33 | 37 | 40 | 43 | 45 | 48 | 50 | 52 | 54 | 56 | 57 | 59 | 60 | 61 | 63 | 14/32 |
| 15/32 | | | | | | | 0 | 7 | 13 | 19 | 24 | 28 | 32 | 35 | 38 | 41 | 43 | 46 | 48 | 50 | 52 | 54 | 55 | 57 | 58 | 59 | 15/32 |
| 16/32 | | | | | | | | 0 | 7 | 13 | 17 | 22 | 26 | 30 | 33 | 36 | 39 | 42 | 44 | 46 | 48 | 50 | 52 | 53 | 55 | 56 | 16/32 |
| 17/32 | | | | | | | | | 0 | 6 | 12 | 18 | 21 | 25 | 29 | 32 | 35 | 38 | 40 | 42 | 44 | 46 | 48 | 50 | 52 | 53 | 17/32 |
| 18/32 | | | | | | | | | | 0 | 6 | 11 | 16 | 20 | 24 | 27 | 30 | 33 | 36 | 38 | 41 | 43 | 45 | 47 | 48 | 50 | 18/32 |
| 19/32 | | | | | | | | | | | 0 | 6 | 11 | 15 | 19 | 23 | 26 | 29 | 32 | 35 | 37 | 39 | 41 | 43 | 45 | 47 | 19/32 |
| 20/32 | | | | | | | | | | | | 0 | 5 | 10 | 14 | 18 | 22 | 25 | 28 | 31 | 33 | 36 | 38 | 40 | 42 | 44 | 20/32 |
| 21/32 | | | | | | | | | | | | | 0 | 5 | 10 | 14 | 17 | 21 | 24 | 27 | 30 | 32 | 34 | 37 | 39 | 41 | 21/32 |
| 22/32 | | | | | | | | | | | | | | 0 | 5 | 9 | 13 | 17 | 20 | 23 | 26 | 29 | 31 | 33 | 35 | 38 | 22/32 |
| 23/32 | | | | | | | | | | | | | | | 0 | 5 | 9 | 13 | 16 | 19 | 22 | 25 | 28 | 30 | 32 | 34 | 23/32 |
| 24/32 | | | | | | | | | | | | | | | | 0 | 4 | 8 | 12 | 15 | 19 | 21 | 24 | 27 | 29 | 31 | 24/32 |
| 25/32 | | | | | | | | | | | | | | | | | 0 | 4 | 8 | 12 | 15 | 18 | 21 | 23 | 26 | 28 | 25/32 |
| 26/32 | | | | | | | | | | | | | | | | | | 0 | 4 | 8 | 11 | 14 | 17 | 20 | 23 | 25 | 26/32 |
| 27/32 | | | | | | | | | | | | | | | | | | | 0 | 4 | 7 | 11 | 14 | 17 | 19 | 22 | 27/32 |
| 28/32 | | | | | | | | | | | | | | | | | | | | 0 | 4 | 7 | 10 | 13 | 16 | 19 | 28/32 |
| 29/32 | | | | | | | | | | | | | | | | | | | | | 0 | 4 | 7 | 10 | 13 | 16 | 29/32 |
| 30/32 | | | | | | | | | | | | | | | | | | | | | | 0 | 3 | 7 | 10 | 13 | 30/32 |
| 31/32 | | | | | | | | | | | | | | | | | | | | | | | 0 | 3 | 6 | 9 | 31/32 |
| 32/32 | | | | | | | | | | | | | | | | | | | | | | | | 0 | 3 | 6 | 32/32 |
| 33/32 | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 3 | 33/32 |
| 34/32 | | | | | | | | | | | | | | | | | | | | | | | | | | 0 | 34/32 |



How To Calculate Adjusted Prices

1. Find the original tread depth in the price/data book.
2. Using 32nds gauge, measure the remaining tread at three points in the two center grooves and average the three measurements.
3. Where the averaged tread depth remaining line meets the appropriate original tread depth column, the percentage of tread worn off the tire will be found.
4. Use this percentage to calculate the customer's replacement price.

With a tire-marking crayon, mark on the adjusted tire:

1. Location of the service condition (circled).
2. Adjustment Claim Number
3. Retailer Name
4. Rub across the DOT serial number so it can be easily read.

Make sure the customer COMPLETES and SIGNS the CUSTOMER section of the Adjustment Form!

Truck Tire Limited Warranty & Safety Manual

For the latest tire warranty information, visit commercial.firestone.com

To ensure optimum tire performance and reduce the risk of a tire failure, Bridgestone Americas Tire Operations, LLC (“BATO”) strongly recommends you read and follow all maintenance and safety information contained in this manual. In addition, we recommend periodic inspection and maintenance, if necessary, by a qualified tire service professional.

Eligibility

Firestone brand truck tires purchased after January 1, 2015 and bearing a U.S. Department of Transportation (DOT) tire identification serial number 0114 or later, are “Eligible Tires” covered under the terms of this Limited Warranty provided that all of the following apply:

- You are the original owner, or original owner’s authorized agent.
- The tire size is specified or recommended for use by the vehicle and rim manufacturers.
- The tire load range and speed rating are equivalent to or greater than that specified or recommended for use by the vehicle manufacturer for the loads anticipated.
- The new tire was approved for sale in the United States, listed in a U.S. price or data book, and purchased from an authorized Firestone brand truck tire retailer.

What Is Warranted & For How Long

Subject to the terms and conditions stated herein, BATO will repair or replace Eligible Tires that becomes unserviceable within six years from the date of manufacture or before the tread has worn down to 2/32 inch (1.6 mm), being to the top of the built-in indicators in the original tread grooves, whichever first occurs.

What This Limited Warranty Does Not Cover

This Limited Warranty does not cover the following:

1. Tire damage due to:
 - A. **Road hazards**, including, without limitation: puncture, cut, impact break, stone drill, bruise, bulge, snag, etc.
 - B. **Improper use or operation**, including, without limitation, improper inflation pressure, overloading, tire/wheel spinning, curbing, use of an improper rim/wheel, tire chain damage, misuse, misapplication, negligence, tire alteration, or for racing or competition purposes.
 - C. **Insufficient or improper maintenance**, including, without limitation: wheel misalignment, worn suspension components, improper tire mounting or demounting, tire/wheel assembly imbalance, improper brake adjustment, or other vehicle conditions, defects, or characteristics.

D. **Contamination or degradation** by petroleum products or other chemicals, fire or other externally generated heat, or water or other material trapped inside the tire during mounting or inflation.

2. Irregular wear, rapid wear, or wear-out; no mileage warranty is expressed or implied.
3. Weather/ozone cracking after four years from date of tire manufacture.
4. Tires subjected to severe under-inflation or run-flat conditions.
5. Tires that have been improperly repaired.
6. Tires rendered unretreadable due to excessive tread wear or improper buffing.
7. Tires improperly retreaded, including without limitation, improper or inadequate inspection, preparation, equipment, material, repair, etc.
8. Ride disturbance or vibration after tread wear use beyond 10% of original usable tread depth.
9. Tires damaged by the use of internally applied additives for balance, sealing, cooling, or any other alleged tire performance enhancement.
10. Tires inflated with anything other than air or nitrogen.
11. Tires purchased or used outside of the United States.
12. The cost of applicable federal, state, and local taxes.
13. Failure to follow any of the safety and maintenance recommendations or warnings contained in this manual.

12 Month — 10% Wear No-Charge Replacement Tire

Eligible Tires adjusted under this Limited Warranty during the first 10% of original usable tread depth or within 12 months from date of purchase (without proof of purchase date, then within 12 months from the date of tire manufacture), whichever occurs first, will be replaced free of charge (Federal Excise Tax included). The cost of mounting and balancing and other service charges, disposal fees, or applicable taxes are payable by you.

6 Year — Worn Original Tread Tire Pro-Rated Replacement

Eligible Tires adjusted under this Limited Warranty that are worn beyond the first 10% of original usable tread depth, or are over 12 months from the date of purchase (without proof of purchase date, then 12 months from the date of tire manufacture), will, at BATO’s option, be repaired or replaced with an equivalent new Firestone brand truck tire on a pro rata basis. To determine the pro-rated replacement price, the percent of used tread wear is multiplied by the dealer’s current selling price for the replacement tire(s). The cost of mounting, balancing, full Federal Excise Tax, and other service charges, disposal fees, or applicable taxes are payable by you.

Enhanced Casing Credit Limited Warranty

For coverage under the Enhanced Casing Limited Warranty, the Eligible Tire must have been used only in long haul, regional, P&D highway service for the entire life of the casing and subsequent retread(s) must have been inspected and retreaded by an authorized Bandag dealer only. Subject to the terms and conditions stated herein, an Enhanced Casing Credit Limited Warranty is available for the tire sizes listed below if all the "Eligibility" requirements listed above are met and an eligible pattern, size and load range tire becomes unserviceable within 6.5 years (78 months) from the date of tire manufacture and with no more than three (3) retreads. Eligible Tires adjusted under the Enhanced Casing Credit Limited Warranty will receive a casing credit as follows:

Eligible Patterns: All

Eligible Sizes & Load Ranges: All

| Original Tread or Retread Count | Dollar Values (22.5 and 24.5 Rim Diameters) | Dollar Values (17.5 and 19.5 Rim Diameters) |
|---------------------------------|---|---|
| Original Tread: | \$100 | \$60 |
| 1st Retread: | \$80 | \$40 |
| 2nd Retread: | \$50 | \$20 |

Replacement Tire Warranty

If you receive a replacement tire under this Limited Warranty, it will be covered by the manufacturer's warranty, if any, given on that tire at that time.

Where to Go

Tire adjustments under this Limited Warranty will only be made at an authorized Firestone brand truck tire retailer in the United States. Consult a phone directory (often listed in the Yellow Pages under "Tire Dealers"), the Internet at www.commercial.firestone.com, or call 1-800-815-9793 for the location nearest you.

Consumer Rights

This Limited Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

Conditions and Exclusions

THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH EXTEND BEYOND THIS WARRANTY. **BATO specifically excludes any obligation for consequential damages or incidental expenses including claims for loss of use of the vehicle on which the tire was installed, loss of time, inconvenience, or commercial loss. This warranty gives you specific legal rights. You may also have other rights that may vary from state-to-state. Some states do not allow limitations on how long an implied warranty lasts or allow the exclusion or limitation of incidental or consequential damages. The above limitation or exclusion may not apply to you.**

This Limited Warranty applies only to consumers actually purchasing and using the tire in the United States.

Obligations under this policy may not be enlarged or altered by anyone.

In accordance with Federal Law, this Limited Warranty has been designated as a "Limited Warranty." Nothing in this Limited Warranty is intended to be a representation that tire failures cannot occur. This Limited Warranty is given in the United States by Bridgestone Americas Tire Operations, LLC, 200 4th Avenue South, Nashville, TN 37201.

Owner's Obligations

It is your obligation to maintain proper tire inflation pressures as specified by the vehicle manufacturer and to operate the vehicle within tire/vehicle load capacity and speed limitations. It is also your obligation to maintain proper wheel alignment and tire/wheel assembly balance.

To request an adjustment, you must present the tire to an authorized Firestone brand truck tire retailer. Your vehicle on which the tire was equipped must also be available for inspection. Complete and sign the customer section of the Bridgestone Americas Tire Operations, LLC Limited Warranty Form or an electronic version of the Limited Warranty Form and pay appropriate replacement price, taxes, disposal fees, and service charges, if any. Tires accepted for warranty compensation become the property of BATO.

Arbitration

You and Bridgestone Americas Tire Operations, LLC agree that all claims, disputes, and controversies between you and it, including any of its agents, employees, successors, or assigns, arising out of or in connection with this Truck Tire Limited Warranty, or any other warranties, express or implied, including a failure of warranty and the validity of this arbitration clause, shall be resolved by binding arbitration between you and it, according to the formal dispute resolution procedures of the National Arbitration Forum, under the Code of Procedure then in effect. This arbitration will be conducted as a document hearing. If you request any procedures beyond a document hearing, you will be responsible for all fees, including filing and administrative fees, above and beyond the fees required for document hearings. The arbitration between you and BATO shall not include any other customers, be combined or consolidated in any fashion with arbitrations involving other customers, or proceed in any form of class action in which the claims of numerous customers are considered together. Any award of the arbitrator(s) may be entered as a judgment in any court of competent jurisdiction. The arbitrators will have no authority to award punitive or other damages not measured by the prevailing party's actual damages, except as may be required by statute. Information may be obtained and claims may be filed at any office of the National Arbitration Forum or at P.O. Box 50191, Minneapolis, MN 55405.

IMPORTANT SAFETY INFORMATION

Any tire, no matter how well constructed, may fail in use as a result of punctures, impact damage, improper inflation pressure, overloading, or other conditions resulting from use or misuse. Tire failure may create a risk of property damage, serious personal injury or death.

SAFETY WARNING

Serious personal injury or death may result from a tire failure. Many tire failures are preceded by vibration, bumps, bulges or irregular wear. If a vibration occurs while driving your vehicle or you notice a bump, bulge or irregular wear, have your tires and vehicle evaluated by a qualified tire service professional.

To reduce the risk of tire failure, Bridgestone Americas Tire Operations, LLC strongly recommends you read and follow all safety information contained in this manual, tire industry publications such as those published by the Rubber Manufacturer's Association (RMA), and tire mounting procedures published by the Occupational Safety and Health Administration (OSHA) of the U. S. Department of Labor. In addition, we recommend periodic inspection and maintenance, if necessary, by a qualified tire service professional.

Tire Inflation Pressure

Tires need proper inflation pressure to operate effectively and perform as intended. Tires carry the vehicle, passenger, and cargo loads and transmit the braking, acceleration, and turning forces. The vehicle manufacturer recommends the inflation pressures for the tires mounted on your vehicle.

SAFETY WARNING

Driving on tires with improper inflation pressure is dangerous.

- *Under-inflation causes excessive tire heat build-up and internal structural damage.*
- *Over-inflation makes it more likely for tires to be cut, punctured, or broken by sudden impact.*

These situations can cause a tire failure, even at a later date, which could lead to serious personal injury or death. Consult the vehicle tire information placard and/or owner's manual for the recommended inflation pressures.

In addition to tire damage, improper inflation pressure may also:

- Adversely affect vehicle ride and handling.
- Reduce tire tread wear.
- Affect fuel economy.

Therefore, follow these important recommendations for tire and vehicle safety, mileage, and economy:

- Always keep the vehicle manufacturer's recommended inflation pressure in all your tires, including inside duals.
- Check their pressure at preventative maintenance intervals and during pre-trip vehicle inspections.

Your vehicle's tire information placard and/or owner's manual will tell you the recommended cold inflation pressure for all your tires. For tractor/trailers, a placard is applied to each. For questions about locating or understanding the tire information placard(s), consult your vehicle owner's manual or ask a qualified tire service professional

Maximum Pressure Indicated on the Tire Sidewall:

This is the maximum permissible inflation pressure for the tire only. The vehicle manufacturer's recommended tire pressures may be lower than, or the same as, the maximum pressure indicated on the tire sidewall. The vehicle manufacturer's specification of tire pressure is limited to your particular vehicle and takes into account your vehicle's load, ride, and handling characteristics, among other criteria. Since there may be several possible vehicle applications for a given tire size, a vehicle manufacturer may choose a different inflation pressure specification for that same size tire on a different vehicle. Therefore, always refer to the inflation pressure specifications on the vehicle tire information placard and/or in your vehicle owner's manual.

Pressure Loss: Truck tires can lose 2 psi (14 kPa) per month under normal conditions and can lose 2 psi (14 kPa) for every 10°F (5.6°C) temperature drop. A puncture, leaking valve, or other damage could also cause inflation pressure loss. If a truck tire loses more than 4 psi (28 kPa) per month, have it checked by a qualified tire service professional.

Tips for Safe Tire Inflation

SAFETY WARNING

Inflating an unsecured tire is dangerous. If it bursts, it could be hurled into the air with explosive force resulting in serious personal injury or death. Never adjust the inflation pressure of a truck tire unless it is placed in a safety cage or is secured to the vehicle or a tire mounting machine. Never stand or lean over the tire or in front of the valve when inflating.

SAFETY WARNING

Never re-inflate a truck tire that has been run at very low inflation pressure (i.e. 80% or less of normal operating pressure) without a complete inspection of the entire tire. Immediately have the tire demounted and inspected by a qualified tire service professional.

- The U.S. Department of Transportation requires a pre-trip vehicle inspection. Pre-trip vehicle inspections and preventative maintenance should include cold-tire inflation pressure checks. Don't forget to check the inflation pressure of inside duals.
- The only correct method for checking inflation pressure is to use an accurate tire inflation pressure gauge. Kicking or thumping a tire will only tell you when a tire is totally flat.
- Check inflation pressure when the tires are "cold." Tires are considered "cold" when the vehicle has been parked for three hours or more, or if the vehicle has been driven less than a mile at moderate speed.
- Never release pressure from a hot tire in order to reach the recommended cold tire inflation pressure. Normal driving causes tires to run hotter and inflation pressure to increase. If you reduce inflation pressure when your tires are hot, you may dangerously under inflate your tires.
- If it is necessary to adjust inflation pressure when your tires are "hot," set their inflation pressure to 10 psi (69 kPa) above the recommended cold inflation pressure. Recheck the inflation pressure when the tires are cold.
- If your tires lose more than 4 psi (28 kPa) per month, the tire, tube (if applicable), valve, or rim/wheel may be damaged. Consult a qualified tire service professional for an inspection.
- A difference of 5 psi (35 kPa) or more between duals is not recommended.
- Use valve caps to keep the valves clear of debris and to help guard against inflation pressure loss

Tips for Safe Loading

SAFETY WARNING

Driving your vehicle in an overloaded condition is dangerous. Overloading causes excessive tire heat build-up and internal structural damage. This can cause a tire failure, even at a later date, which could lead to serious personal injury or death. Consult the vehicle tire information placard, certification label, and owner's manual for the recommended vehicle load limits and loading recommendations.

- Always keep the vehicle manufacturer's recommended inflation pressure in all your tires, including inside duals. Check their pressure at preventative maintenance intervals and during pre-trip vehicle inspections.
- Never exceed the maximum load rating stamped on the sidewall of your tire.
- Never exceed the gross vehicle weight rating (GVWR) or gross axle weight ratings (GAWR) of your vehicle.
- Never exceed the maximum load or inflation pressure capacity of the rim/wheel.
- Consult your vehicle owner's manual for load recommendations and special instructions (such as for carrying unusually heavy loads).

Tire Damage & Inspection

Evaluation and maintenance of your tires is important to their performance and the service they provide to you. Over time and/or through use, the condition of a tire can change from exposure to everyday road conditions, the environment, damaging events such as punctures, and other external factors.

SAFETY WARNING

Driving on damaged tires is dangerous. A damaged tire can suddenly fail causing serious personal injury or death. Have your tires regularly inspected by a qualified tire service professional.

You should visually inspect your tires during pre-trip vehicle inspections and inflation pressure checks. In addition, have your tires periodically evaluated by a qualified tire service professional when your vehicle is serviced such as routine maintenance intervals, oil changes, and tire rotations. In particular, note the following tips for spotting tire damage:

- After striking anything unusual in the roadway, have a qualified tire service professional demount the tire and inspect it for damage. A tire may not have visible signs of damage on the tire surface. Yet, the tire may suddenly fail without warning, a day, a week, or even months later.

- Inspect your tires for cuts, cracks, splits or bruises in the tread and sidewall areas. Bumps or bulges may indicate a separation within the tire body. Have your tire inspected by a qualified tire service professional. It may be necessary to have it removed from the rim/wheel for a complete inspection. Do not delay performing any necessary repair(s).
- Inspect your tires for adequate tread depth. When the tire is worn to the built-in indicators at $\frac{2}{32}$ inch (1.6 mm) or less tread groove depth, or the tire cord or fabric is exposed, the tire is dangerously worn and must be replaced immediately.
- Federal regulations require steer axle tires to have $\frac{4}{32}$ inch (3.2 mm) or greater tread depth on vehicles over 10,000 lbs. (4536 kg) GVWR.
- Inspect your tires for uneven wear. Wear on one side of the tread or flat spots in the tread may indicate a problem with the tire or vehicle. Consult a qualified tire service professional.
- Inspect your rims/wheels also. If you have a bent, chipped, or cracked rim/wheel, it must be replaced.

Tire Manufacture Date

The tire manufacture date is determined by examining the DOT tire identification number, also known as the DOT serial number or code, which can be found on at least one sidewall near the rim/wheel. It may be necessary to look on both sides of the tire to find the entire serial code.

Tires Produced Since 2000: The last four (4) digits of the serial code identify the week and year of production. For example, a tire with a serial code ending in “2406” would have been produced in the 24th week of 2006.

Tires Produced Prior to 2000: The last three (3) digits of the serial code identify the week and year of production. For example, a tire with a code ending in “329” would likely have been produced in the 32nd week of 1999, but possibly produced in 1989. If in doubt, consult a qualified tire service professional.

Tire Repairs

SAFETY WARNING

Driving on an improperly repaired tire is dangerous. An improper repair can be unreliable or permit further damage to the tire. The tire may suddenly fail, causing serious personal injury or death. A complete inspection and repair of your tire in accordance with Rubber Manufacturers Association (RMA) procedures should be conducted by a qualified tire service professional.

The comprehensive procedures and recommendations for truck tire repair are beyond the scope of this manual; however, note the following:

- **The tire must be demounted from the rim/wheel for a complete inspection, inside and out.** Some damage to the tire may only be evident on the interior of the tire. Any tire repair done without removing the tire from the rim/wheel is improper.
- **A patch must be applied to the interior of the tire and the puncture hole filled with suitable plug/stem filler.** This helps ensure that the interior of the tire is adequately sealed to prevent inflation pressure loss and prevents contamination of the steel belts and other plies from the elements (such as water) in the outside world. Using only a plug/stem, or using only a patch, is not a safe or proper repair.
- **The truck/bus tire puncture repair injury limit to the tread area is $\frac{3}{8}$ inch (10 mm).** Larger injuries, or damage in areas outside the tread, should be evaluated and repaired, if possible, by qualified tire service professionals at a full-service repair facility using RMA-approved procedures.
- **Never substitute a tube for a proper repair or to remedy an improper repair.**
- **Not all punctured or damaged tires can be properly repaired;** consequently, they must be replaced.
- **Repair and retread, if possible, tires having a tread depth of $\frac{2}{32}$ inch (1.6 mm) or less remaining in any tread groove.**
- **Tubes, like tires, should only be repaired by a qualified tire service professional.**
- **Any improper repair voids the tire Limited Warranty.** See “Limited Warranty” in this manual.

Removing Tire/Wheel Assembly from Vehicle

SAFETY WARNING

Always follow the manufacturer's recommended procedure for securing and raising your vehicle prior to attempting to remove a tire.

SAFETY WARNING

If the tire has internal damage, it may burst with explosive force, causing serious personal injury or death. Always deflate a tire and wheel assembly completely before loosening any lug nut when removing a tire from a vehicle for service or demounting. On dual wheel assemblies, both tires should be deflated and removed before any work is started.

Tire Mounting & Other Servicing

SAFETY WARNING

Removing and replacing tires on wheels can be dangerous. Attempting to mount tires with improper tools or procedures may result in a tire explosion causing serious personal injury or death. This is only a job for a qualified tire service professional. Never perform tire service procedures without proper training, tools, and equipment.

This manual is not intended to provide proper training or service procedures for tire mounting, demounting, balancing, rotation, or repair. Please leave these tasks to qualified tire service professionals.

Only specially trained persons should mount tires. For proper mounting procedures, consult the requirements of the Occupational Safety and Health Administration (OSHA) of the U S Department of Labor and procedures published by the Rubber Manufacturers Association, 1400 K Street, NW Washington, D. C. 20005 (www.rma.org).

SAFETY WARNING

Inflating an unsecured tire is dangerous. If it bursts, it could be hurled into the air with explosive force resulting in serious personal injury or death.

- Always stand well clear of any tire mounting operation. This is especially important when the service operator inflates the tire.
- When inflating a tire after mounting on a rim/wheel, always use a safety cage and an extension hose with pressure gauge and clip-on chuck.
- Never adjust the inflation pressure of a truck tire unless it is placed in a safety cage or is secured to the vehicle or a tire mounting machine.
- Never stand or lean over the tire or in front of the valve when inflating.

SAFETY WARNING

Never pour or spray any flammable substance into or onto a tire or rim/wheel for any purpose whatsoever. The residue left by the substance could result in a fire or explosion which may cause severe injury or death.

SAFETY WARNING

Never put flammable substances such as gasoline or ethyl ether into a tire and light with a match/flare so that the resulting explosion seats the beads of a tubeless tire. This practice is extremely dangerous and may result in a severe explosion or undetected damage to the tire or rim/wheel which may cause a failure resulting in severe injury or death.

- **Tires must match the width and diameter requirements of the wheels.** For example, 22.5 inch diameter tires must only be mounted to 22.5 inch diameter rims/wheels. Radial tires must only be mounted to wheels approved for radial tires.
- **Inspect the tire and rim/wheel.** Rims/wheels must be free of cracks, dents, chips, and rust. Tires must be free of bead damage, cuts, punctures, foreign material, and moisture.
- **For a tubeless truck tire, always install a new valve, or new valve core and cap,** each time a new or retreaded tire is installed.
- **For a tube-type truck tire, always use a new, proper size tube and flap** each time a new or re-treaded tire is installed.
- **Use only vegetable oil-based lubricants in mounting or demounting.**
- **Always ensure rim components fit properly before inflating.**
 - Never tap component parts with a tool/hammer/mallet while tire is inflated.
 - Never attempt to disassemble multi-piece rims while inflated.
- **Never inflate a tire beyond 40 psi (275 kPa) to seat the beads.** Be absolutely certain beads are fully seated before adjusting inflation pressure to the level recommended for vehicle operation.
- **Use valve caps** to keep the valves clear of debris and to help guard against inflation pressure loss.
- **Always stand well away from the work area** when tires are being spin-balanced either on or off the vehicle.

Tire Mixing

SAFETY WARNING

Driving your vehicle with an improper mix of tires is dangerous. Your vehicle's handling characteristics can be seriously affected. You could have an accident resulting in serious personal injury or death. Consult your vehicle owner's manual and a qualified tire service professional for proper tire replacement.

Dual Matching

Tires paired in a dual assembly should be matched in tire construction and dimension. Improperly matched tires may result in irregular wear, rapid wear, and premature tire failure. Failure to match tires in a dual assembly may result in sudden tire destruction.

For radial tires, properly paired dimension tolerances are as follows:

- Diameter: within 1/4 inch (6.4 mm) of each other
- Circumference: within 3/4 inch (19 mm) of each other

High Speed Driving

SAFETY WARNING

Driving at high speed is dangerous and can cause a vehicle accident, including serious personal injury or death.

- Regardless of the speed and handling capabilities of your vehicle and its tires, a loss of vehicle control can result from exceeding the maximum speed allowed by law or warranted by traffic, weather, vehicle, or road conditions.
- High-speed driving should be left to trained professionals operating under controlled conditions.
- No tire, regardless of its design or speed rating, has unlimited capacity for speed, and a sudden tire failure can occur if its limits are exceeded. See "Tire Speed Restrictions," the next section in this manual.

Refer to your vehicle owner's manual for any tire pressure recommendations for high speed driving.

Tire Speed Restrictions

Firestone brand truck tires have maximum recommended speeds. When replacing your tires, check your vehicle owner's manual and tire information placard and consult with a Firestone brand truck tire retailer for recommendations and information about tire speed capability.

The speed capabilities of truck tires are based on standardized laboratory tests under specific, controlled conditions. While these tests may relate to performance on the road, real-world driving is rarely identical to any test conditions. Your tire's actual speed capability may be less since it is affected by factors such as inflation pressure, load, tire condition (including damage), wear, vehicle condition (including alignment), driving conditions, and duration at which the speed is sustained.

Tire Spinning

SAFETY WARNING

Spinning a tire to remove a vehicle stuck in mud, ice, snow, or wet grass can be dangerous. A tire spinning at a speedometer reading above 35 mph (55 km/h) can in a matter of seconds reach a speed capable of disintegrating a tire with explosive force. Under some conditions, a tire may be spinning at a speed twice that shown on the speedometer. This could cause serious personal injury or death to a bystander or passenger. Never spin a tire above a speedometer reading of 35 mph (55 km/h).

Tire Storage

Tires should be stored indoors in a cool, dry place where water cannot collect inside them. Tires should be placed away from electric generators/motors and sources of heat such as hot pipes. Storage surfaces should be clean and free of grease, gasoline, diesel fuel, or other substances which can deteriorate the rubber.

SAFETY WARNING

Improper storage can damage your tires in ways that may not be visible and can lead to a failure resulting in serious personal injury or death.

The spare tire in your vehicle is intended to be used as a spare when needed. The spare tire carrier is not intended to be used for long term storage.

Tire Service Customer Satisfaction

Normal tire maintenance and Limited Warranty services are available at locations across the U.S.A. Visit us at www.commercial.firestone.com, or call 1-800-815-9793 to find an authorized Firestone brand truck tire retailer nearest you.

Additional information on the care and service of truck tires is available from the following organizations:

US Tire Manufacturers Association

1400 K Street, N.W.
Washington, DC 20005-2403
www.USTires.org

Rubber Association of Canada

2000 Argentia Road, Plaza 4, Suite 250
Mississauga, Ontario L5N 1W1
www.rubberassociation.ca

Tire Registration

Registration of your tires is an important safety precaution since it enables the manufacturer to notify you in the event of a recall. When you purchase replacement tires, the retailer will provide a registration card on which the tire identification numbers have been recorded; fill in your name and address on the card and mail it promptly. Some retailers may submit the registration for you. You do not need to register original equipment tires on new vehicles as the vehicle manufacturer handles that for you.

For Assistance or Information:

1. First contact the nearest Firestone truck tire Dealer by consulting the yellow pages of your local telephone book.
2. If additional assistance is required, call or write the nearest Firestone Technical Service Center listed below.

Firestone Toll-Free Number

1-800-356-4644

Bridgestone Americas Tire Operations, LLC
200 4th Avenue South, Nashville, TN 37201
(615) 937-1000

Technical Service Centers

WEST REGION

2500 S. Doubleday • Ontario, CA 91761

Central Region

2100 Internationale Pkwy • Woodridge, IL 60517

EAST REGION

201 Bridgestone Pkwy • Lebanon, TN 37090

www.commercial.firestone.com

Effective January 2015

Commercial Tire Tubes, Valves & Flaps

| TIRE SIZE | TUBE | VALVE | FLAP |
|-----------|---------------|-------|------|
| 8.25R15 | 8.25R15 | TR444 | 15R7 |
| 9.00R15 | 9.00R15 | TR444 | 15R8 |
| 10.00R15 | 10.00R15 | TR444 | 15R8 |
| 8.25R20 | 8.25R20 | TR442 | 20R7 |
| 9.00R20 | 9.00R20 | TR444 | 20R8 |
| 10.00R20 | 11.1/10.00R20 | TR444 | 20R8 |
| 11.00R20 | 11.00R20 | TR444 | 20R8 |

| TIRE SIZE | TUBE | VALVE | FLAP |
|-----------|----------------|-----------|-------|
| 12.00R20 | 12.00R20 | TR444 | 20R9 |
| 13/80R20 | 13/80R20 | VS3-04-06 | 20R9 |
| 14/80R20 | 14/80R20 | VS3-04-06 | 20R10 |
| 10.00R22 | 10.00R22 | TR444 | 22R8 |
| 11.00R22 | 11.00R22 | TR444 | 22R8 |
| 11.00R24 | 11.00/12.00R24 | TR444 | 24R8 |
| 12.00R24 | 11.00/12.00R24 | TR444 | 24R9 |

Radial & Bias Tire Construction



Radial



Bias/Diagonal

Radial tire body ply cords are placed straight across the tire from bead to bead. In addition, radial tires have belt plies, which run circumferentially around the tires, under the tread. They constrict the radial ply cords and stabilize the tread area.

Bias/Diagonal tires have multiple layers of plies with the cords in adjacent plies running in alternate diagonal directions from bead to bead. The tires may also have narrow plies under the tread, called breakers, with cords that lie in approximately the same direction as the body ply cords.

The type of construction can be determined by looking at the size designation molded on the tire's sidewall. Radial truck tire sizes have an "R" in the size designation while bias/diagonal truck tire sizes have a hyphen in the size description. For example, a 10.00R20 tire is a radial, while a 10.00-20 tire is a non-radial.

In addition, ALL radial tires have the word "RADIAL" molded onto the sidewall. All radial truck tires also use an "R" in the size designation, e.g., 285/75R24.5.

Definitions

Truck Tire Size Designation

10.00 R 20 14 (G)

Nominal Section Width in Inches (Conventional)

Radial Construction

Tube Type Rim Diameter in Inches (5° Tapered Bead)

Ply Rating

Load Range

11 R 22.5 14 (G)

Nominal Section Width in Inches (Conventional)

Radial Construction

Tubeless Rim Diameter in Inches (15° Tapered Bead)

Ply Rating

Load Range

Nominal Section Width
in Millimeters (Metric)

A 285/75 R 24.5 14 (G)

Aspect Ratio

Radial Construction

Tubeless Rim Diameter in Inches (15° Tapered Bead)

Ply Rating

Load Range

see page 41

see page 44

see page 44

Nominal Section Width
in Millimeters (Metric)

315/80 R 22.5 20 (L)

Aspect Ratio

Radial Construction

Tubeless Rim Diameter in Inches (15° Tapered Bead)

Ply Rating

Load Range

Nominal Section Width
in Millimeters (Metric)

445/50 R 22.5 20 (L)

Aspect Ratio

Radial Construction

Tubeless Rim Diameter in Inches (15° Tapered Bead)

Ply Rating

Load Range

Truck Tire Dimensions

A. (Nominal) Section Width

Measurement of the cross section of an unladen tire across the casing only – not including ribs or protrusions.

A. Overall Width

Measurement of the cross section of an unladen tire, including ribs and protrusions. Usually the same as section width on radial tires.

B. Section Height

Distance from the bead seat to the tread surface of an unladen tire.

C. Aspect Ratio

$$\text{Aspect Ratio} = \frac{\text{Section Height}}{\text{Section Width}}$$

D. Tread Width

Distance across the tread face of an unladen tire.

E. Tread Depth

Distance from tread surface to major groove base at designated measuring point.

F. Loaded Width

The maximum section width of a loaded tire under maximum dual load and inflation as stamped on the sidewall of the tire.

G. Overall Diameter

The measurement of the distance of an unladen tire from tread surface to tread surface on opposite sides of the tire.

H. Static Loaded Radius

Distance from the center of the axle to the ground of a loaded tire under maximum dual load and inflation as stamped on the sidewall of the tire.

I. Rim Width

Distance between the rim flanges.

J. Nominal Rim Diameter


Diameter of the rim from bead seat to bead seat in inches.

Minimum Dual Spacing

The minimum allowable distance between the wheel center lines in a dual arrangement.

Revolutions Per Mile (RPM)

The number of tire revolutions in one mile, measured at 55 mph maximum dual load and inflation (as stamped on the tire's sidewall).

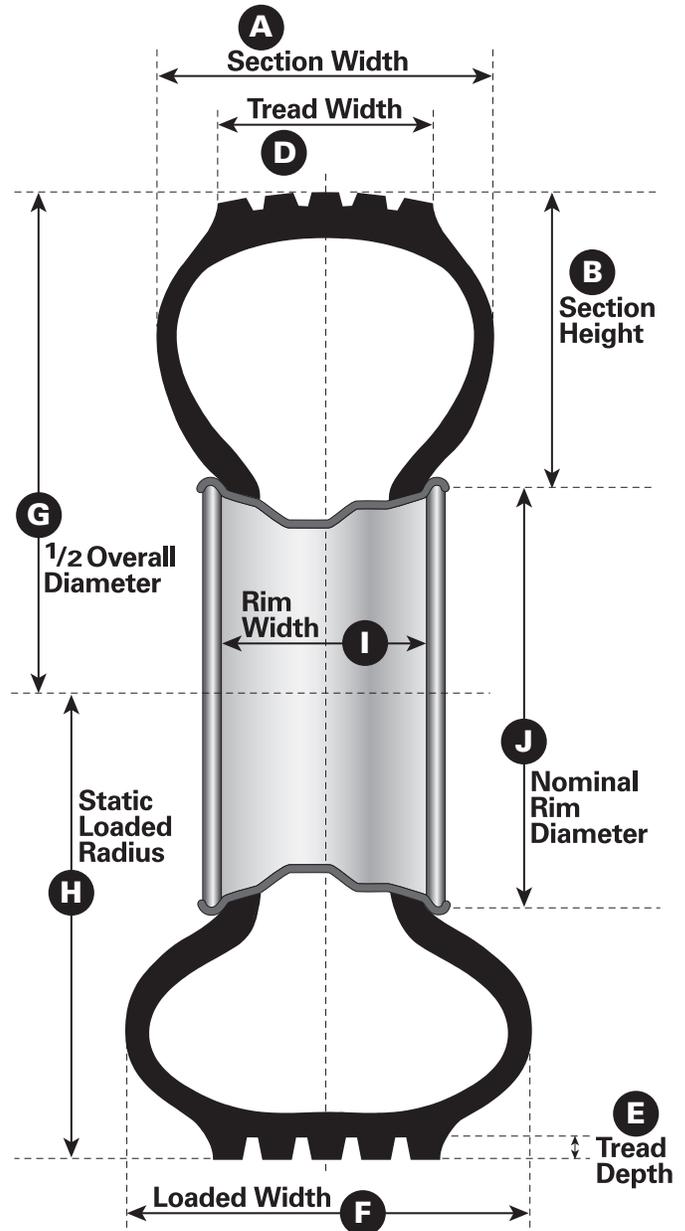

NOTE: Tires mounted and inflated to recommended pressure. All dimensions measured 24-hours after initial inflation.

Ply Rating/Load Range

| PLY RATING | LOAD RANGE |
|------------|------------|
| 2 | A |
| 4 | B |
| 6 | C |
| 8 | D |
| 10 | E |
| 12 | F |
| 14 | G |
| 16 | H |
| 18 | J |
| 20 | L |

While there is no industry-wide definition of ply rating, truck tires are frequently marked with ply rating and equivalent load range. These markings are used to identify the load and inflation limits of that particular tire, when used in a specific type of service. See adjacent table for conversion of tire markings. Corresponding loads may be found in appropriate load tables.

Speed Symbol

| SPEED SYMBOL | SPEED CATEGORY (KM/H) | MPH |
|--------------|-----------------------|-----|
| F | 80 | 50 |
| G | 90 | 55 |
| J | 100 | 62 |
| K | 110 | 68 |
| L | 120 | 75 |
| M | 130 | 81 |
| N | 140 | 87 |

The SPEED SYMBOL indicates the speed at which the tire can carry a load corresponding to its Load Index under service conditions specified by the tire manufacturer.

International Load Index Numbers

| LOAD INDEX | KGS | LBS | LOAD INDEX | KGS | LBS | LOAD INDEX | KGS | LBS | LOAD INDEX | KGS | LBS | LOAD INDEX | KGS | LBS | LOAD INDEX | KGS | LBS |
|------------|-----|------|------------|------|------|------------|------|------|------------|------|------|------------|------|------|------------|------|-------|
| 90 | 600 | 1325 | 104 | 900 | 1985 | 118 | 1320 | 2910 | 132 | 2000 | 4410 | 146 | 3000 | 6610 | 160 | 4500 | 9920 |
| 91 | 615 | 1355 | 105 | 925 | 2040 | 119 | 1360 | 3000 | 133 | 2060 | 4540 | 147 | 3075 | 6780 | 161 | 4625 | 10200 |
| 92 | 630 | 1390 | 106 | 950 | 2095 | 120 | 1400 | 3085 | 134 | 2120 | 4675 | 148 | 3150 | 6940 | 162 | 4750 | 10500 |
| 93 | 650 | 1435 | 107 | 975 | 2150 | 121 | 1450 | 3195 | 135 | 2180 | 4805 | 149 | 3250 | 7160 | 163 | 4875 | 10700 |
| 94 | 670 | 1475 | 108 | 1000 | 2205 | 122 | 1500 | 3305 | 136 | 2240 | 4940 | 150 | 3350 | 7390 | 164 | 5000 | 11000 |
| 95 | 690 | 1520 | 109 | 1030 | 2270 | 123 | 1550 | 3415 | 137 | 2300 | 5070 | 151 | 3450 | 7610 | 165 | 5150 | 11400 |
| 96 | 710 | 1565 | 110 | 1060 | 2335 | 124 | 1600 | 3525 | 138 | 2360 | 5205 | 152 | 3550 | 7830 | 166 | 5300 | 11700 |
| 97 | 730 | 1610 | 111 | 1090 | 2405 | 125 | 1650 | 3640 | 139 | 2430 | 5355 | 153 | 3650 | 8050 | 167 | 5450 | 12000 |
| 98 | 750 | 1655 | 112 | 1120 | 2470 | 126 | 1700 | 3750 | 140 | 2500 | 5510 | 154 | 3750 | 8270 | 168 | 5600 | 12300 |
| 99 | 775 | 1710 | 113 | 1150 | 2535 | 127 | 1750 | 3860 | 141 | 2575 | 5675 | 155 | 3875 | 8540 | 169 | 5800 | 12800 |
| 100 | 800 | 1765 | 114 | 1180 | 2600 | 128 | 1800 | 3970 | 142 | 2650 | 5840 | 156 | 4000 | 8820 | 170 | 6000 | 13200 |
| 101 | 825 | 1820 | 115 | 1215 | 2680 | 129 | 1850 | 4080 | 143 | 2725 | 6005 | 157 | 4125 | 9090 | | | |
| 102 | 850 | 1875 | 116 | 1250 | 2755 | 130 | 1900 | 4190 | 144 | 2800 | 6175 | 158 | 4250 | 9370 | | | |
| 103 | 875 | 1930 | 117 | 1285 | 2835 | 131 | 1950 | 4300 | 145 | 2900 | 6395 | 159 | 4375 | 9650 | | | |

Selection of Load Index Numbers: Select the load index number with the equivalent load of the tire (round up to midpoint). If the tire maximum load rating is only given in customary units, convert that load to kilograms and select the closest load index equivalent (Kg) load.

Inflation Pressure

For optimum tire performance, proper inflation pressures for the loads being carried must be maintained. The proper inflation pressure can be found in the load and inflation tables of this book.

Air pressure of all tires should be checked and corrected weekly with an accurate inflation pressure gauge. Since air expands when heated, tire pressures will increase due to the normal build-up of heat during operation. For this reason, tire pressures should be checked while cold. Do not bleed air from tires while hot. This will result in an under-inflated condition.

Under-inflated tires build up excessive heat due to over-deflection and may result in tire deterioration. Operating on an improperly inflated tire will cause severe tire damage.

The inflation pressures given are the minimum pressures for the associated load. Do not exceed the maximum loads listed in this book without consulting a Bridgestone Technical Representative. Any tire known or suspected to have been run at 80% or less of normal operating inflation pressure and/or overloading could possibly have permanent structural damage (steel cord fatigue).

Tire Mixing

Tires of different sizes or construction must never be mixed on the same axle.

Tires of different construction can be mixed in the following manner:

A) TRUCKS WITH TWO AXLES, FOUR WHEELS:
Radials can be mixed with bias ply tires providing the radials are mounted in pairs on the rear axle.

B) TRUCKS WITH TWO AXLES, SIX WHEELS:
(e.g. single axle tractors) Radials can be mixed with bias ply tires providing tires of the same construction are mounted on the same axle.

C) TRUCKS WITH MORE THAN TWO AXLES:
(e.g., tandem axle tractors) The front tires may be bias or radial and can be run with bias or radial on the drive axles. Trucks with multiple drive axles

should have tires of the same construction mounted on all drive positions.

D) TRAILERS:
Bias or radial tires may be used, providing tires on the same axle are of the same construction. Tires of different construction must not be used in dual fitments. Tubeless tires can be mixed with tube-type tires, providing they are of equivalent sizes.

E) WIDE BASE & DUALS:
Wide base and duals can be mounted together as long as overall diameter is within 1/4 inch.

Dual Matching


Tires in dual assemblies should be matched with regard to design and dimensional tolerances as noted below.

Improperly matched duals may result in irregular wear, rapid wear, vehicle mechanical problems and premature tire failure. Failure to match tires in a dual assembly may result in sudden tire destruction.

DUAL MATCHING LIMITS

| TIRE CONSTRUCTION | DIAMETER | CIRCUMFERENCE |
|-------------------|---------------|---------------|
| Radial | 0 to 1/4 inch | 0 to 3/4 inch |

Mismatched Duals

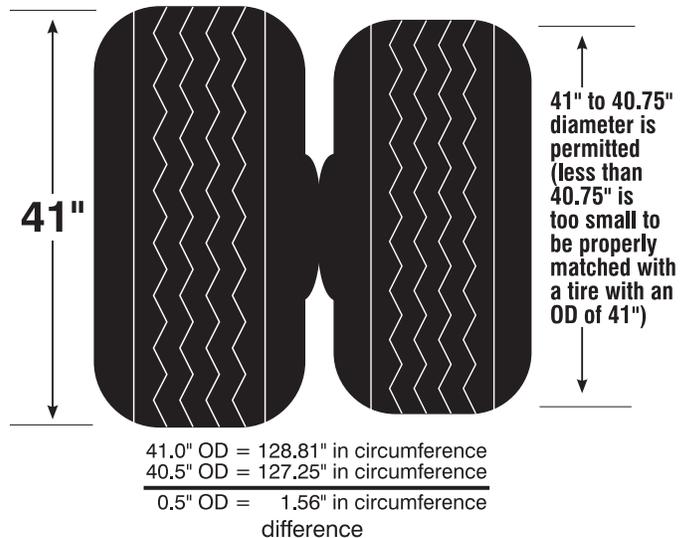

Medium Truck Approved Rim Width & Minimum Dual Spacing

| TIRE SIZE | APPROVED RIM WIDTH | MIN. DUAL SPACING |
|------------------|--|-------------------|
| TUBE TYPE | | |
| 11.00R24 | 8.5, 8.50VM, 8.0 , 7.5 | 13.2 |
| 12.00R24 | 9.0, 8.5 , 8.50VM, 8.0 | 14.1 |
| TUBELESS | | |
| 9R17.5HC | 6.75HC | 10.3 |
| 8R19.5 | 5.25, 6.00 , 6.00RW, 6.75, 6.75RW | 9.1 |
| 9R22.5 | 6.00, 6.75 , 7.50 | 10.3 |
| 10R22.5 | 6.75, 7.50 , 8.25 | 11.4 |
| 11R22.5 | 7.50, 8.25 | 12.5 |
| 12R22.5 | 8.25, 9.00 | 13.5 |
| 11R24.5 | 7.50, 8.25 | 12.5 |
| 12R24.5 | 8.25, 9.00 | 13.5 |
| 215/75R17.5 | 6.00HC , 6.75HC | 9.3 |
| 245/70R17.5 | 6.75 , 7.50 | 10.6 |
| 225/70R19.5 | 6.00, 6.00RW, 6.75 , 6.75RW | 10.0 |
| 245/70R19.5 | 6.75, 6.75RW, 7.50 , 7.50RW | 11.0 |
| 265/70R19.5 | 7.50 , 7.50RW, 8.25, 8.25RW | 11.6 |
| 285/70R19.5 | 7.50, 8.25 , 9.00 | 12.5 |
| 305/70R19.5 | 9.00 , 8.25, 8.25RW | 13.5 |
| 445/65R19.5 | 13.00 , 14.00 | NA |
| 245/75R22.5 | 6.75, 7.50 | 11.0 |
| 255/70R22.5 | 7.50 , 8.25 | 11.3 |
| 265/75R22.5 | 7.50 , 8.25 | 11.6 |
| 275/70R22.5 | 7.50, 8.25 , 9.00 | 12.2 |
| 295/60R22.5 | 9.00 , 9.75 | 13.0 |
| 295/75R22.5 | 8.25, 9.00 | 13.2 |
| 295/80R22.5 | 8.25, 9.00 | 13.2 |
| 305/70R22.5 | 8.25, 9.00 | 13.8 |
| 315/80R22.5 † | 8.25, 9.00 , 9.75 | 13.8 |
| 385/65R22.5 | 11.75 , 12.25 | NA |
| 425/65R22.5 | 11.75*, 12.25 , 13.00, 14.00 | NA |
| 445/50R22.5 | 14.00 | NA |
| 445/65R22.5 | 12.25*, 13.00 , 14.00 | NA |
| 455/55R22.5 | 14.00 | NA |
| 285/75R24.5 | 8.25 | 12.5 |

Minimum Dual Spacing is listed for the design rim width. If design rim not used Minimum Dual Spacing must be adjusted per note 1 (below) for other rim widths.

Design Rim Width shown in boldface type.

† 8.25-rim may be used if tire load is limited to 8,000 lbs. single and 7,610 lbs. dual @ 130 psi. Note: The minimum dual spacing for 8.25-rim is 13.2". Do not exceed manufacturer's recommended maximum load and inflation.

Note 1: New tire section widths and overall widths will change 0.10-inches for each 0.25-inch change in rim width.

Note 2: Use alternate rims only when recommended rims cannot be used.

Note 3: Do not use different rim widths in dual applications.

* This rim size maybe phased out in the future for this tire size.

Tire Rotation


Tire rotation is a practical means of reducing tire costs when irregular or rapid wear are prevalent. Rotation patterns, such as those recommended by vehicle manufacturers, may be followed. There are no restrictions on criss-cross rotation. Tires having directional type tread patterns should be mounted in the recommended direction of rotation for optimum performance.

For many directional type designs it is permissible to change the direction of rotation after the first $\frac{3}{32}$ " - $\frac{5}{32}$ " of tread wear. Contact tire manufacturer for pattern-specific recommendation. The casing, after retreading, may be run in either direction, as the casing is not directional.

Regrooving

Regroove only those tires marked "Regroovable" on the sidewall. Tires with a remaining tread depth of less than $\frac{2}{32}$ " should not be regrooved. It is recommended that tires exhibiting severe irregular wear not be regrooved. Regrooved tires should not be placed on the front axle.


Regrooving should be restricted to the tire's original tread grooves. A minimum rubber gauge of $\frac{4}{32}$ " must be maintained between the tire's top belt and the re-grooved grooves.

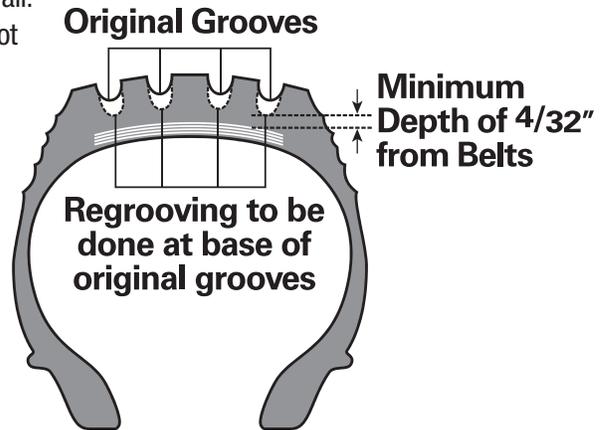

Branding

The location for branding must be chosen carefully due to the thin sidewall gauge. Many sidewalls have branding panels, or designated branding areas as noted in sketch at left. Branding in the wrong location may result in eventual tire failure. It is recommended that the brand be located between the rim line and size panel.


Branding depth should be $\frac{1}{32}$ ". Do not brand deeper than $\frac{2}{32}$ ".

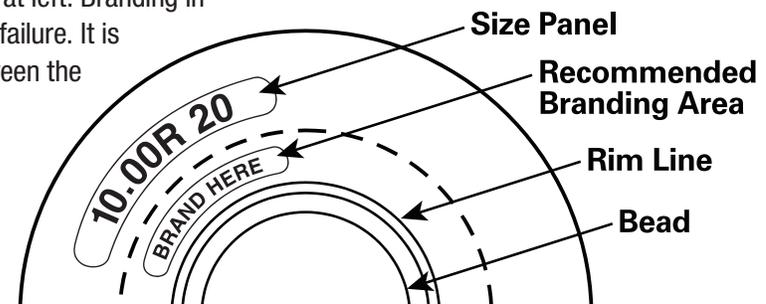

Proper Branding Area on Steel Radial Tire

Wheel Alignment

Toe-In

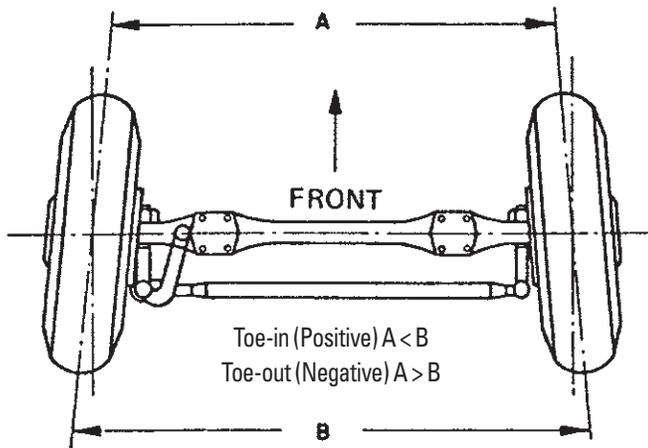


Proper wheel alignment is essential for optimum tire life and vehicle handling characteristics. **Alignment settings should be checked with the truck loaded.** Alignment adjustments can be made on an unloaded truck; however, modifications in the vehicle manufacturer's alignment recommendations may be required for proper "loaded" settings.

Front Axle Recommendations

- **Toe-in:** set as close to zero as vehicle manufacturer's recommendations allow in loaded condition. Do not set beyond zero, as a toe-out condition will develop.
- **Caster:** set to the maximum positive setting which the vehicle manufacturer's recommendations will allow.
- **Camber:** set as close to zero degrees as the vehicle manufacturer's recommendations allow in loaded condition.

Caster

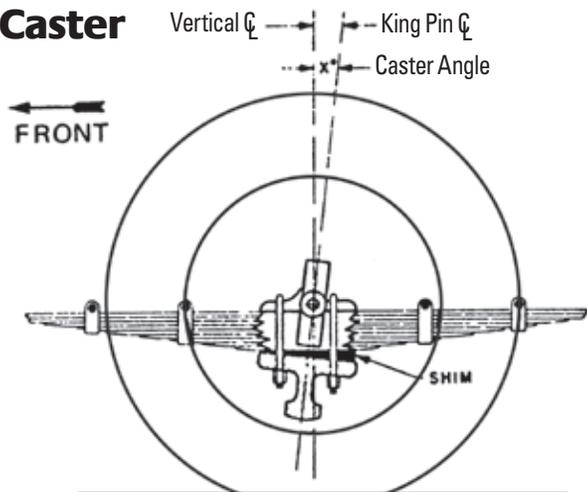


Drive Axle Recommendations

Misalignment of the drive axles may also cause rapid or irregular wear on the front axle as well as the drive axle due to constant steering correction. Drive axle alignment should be corrected before front axle settings are made.

Drive axles should be aligned in the following manner:

1. Position drive axles perpendicular to the chassis centerline.
2. For tandem drives, the drive axles should be positioned parallel to one another.

Camber

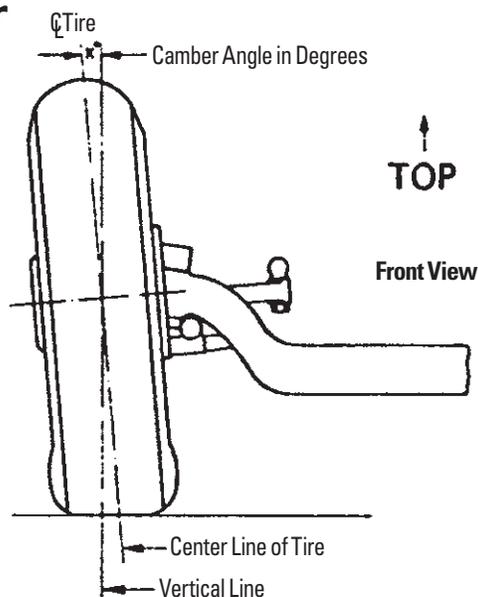

If they are not parallel, the condition is referred to as "tandem scrub." Our recommendation is the distance between the axle centers is set so the distance on the right is equal to or greater than the distance on the left by up to 1/8" (.125").

The distance on the axle centers on the right should never be shorter than the distance on the left. The wear pattern that will result from this situation is inside left front/outside right front shoulder wear.

Balance/Runout


Tire and wheel imbalance may result in irregular tire wear. Steering axle and drive axle tires should be balanced dynamically for best results. Vibration may also be the result of mismatch of the high and low spots of the tire and wheel.

To resolve vibration problems, the runout of tire and rim should be measured, then matched in the following manner:



1. With the tire mounted on the rim, number both at 12 asymmetrical points.
2. Measure runout at both shoulders of the tire (inside & outside) and record the results. (Note: accuracy in these measurements is essential.)
3. Demount the tire, measure both sides of the rim for runout, record the results, then average the inside and outside measurements.
4. Matching the lowest average point of the rim to the highest average point of the tire, remount the tire, then balance accurately.
5. It may be necessary to repeat this procedure since the tire cannot be measured accurately while on an imperfect rim.

Note: If a runout dial is not available, rotate the tire 180° relative to the rim and remount. If the vibration persists, rotate the tire another 90°, then another 180°.

6. The maximum suggested radial runout for a rotating tire/wheel assembly is 0.095 inches for both front and rear tire positions. If runout exceeds these limits, check for bent rims, cocked rims, improperly adjusted wheel bearings, improper tire bead seating, tire flat spots, improperly tightened rim clamps and rear rim spacers.



Proper Position for Measuring Runout

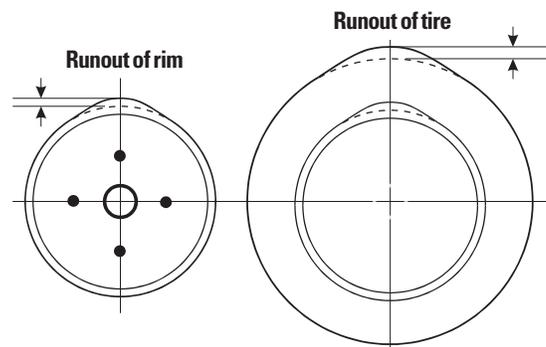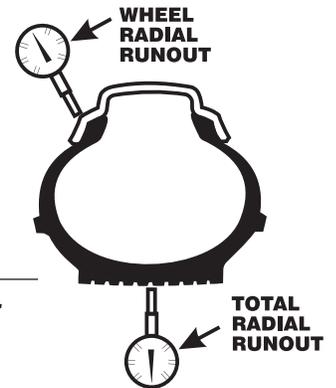

Runout of Tire Due to Runout of Rim

Special procedure for improving steering tire run-out on vehicles with hub-piloted wheels

If you suspect high run-out on the steering position and have hub-piloted wheels, use the following procedure to improve the radial run-out.

1. Measure the radial run-out of the tire/wheel assemblies on the vehicle's steering position. Mark the highest and lowest points of the radial run-out on the tire with chalk or other marker.
2. Remove the tire/wheel assembly and position the hub so that the gap between any two of the hub pilot pads is at 12:00. With the hub in this position place the tire/wheel assembly on the hub so that the high point mark is at the top (12:00). Carefully tighten one nut with a hand wrench until it is snug enough to hold the wheel securely. Reposition the wheel on the hub pilot pads while tightening.

(Don't use an air wrench to tighten the first nut. It will reposition the wheel and not let gravity keep the wheel in contact with the hub pads that are at the top). After the first nut is tightened with the hand wrench, tighten all nuts according to sequence and procedure shown in **TMC RP 222, User's Guide to Wheels and Rims**.

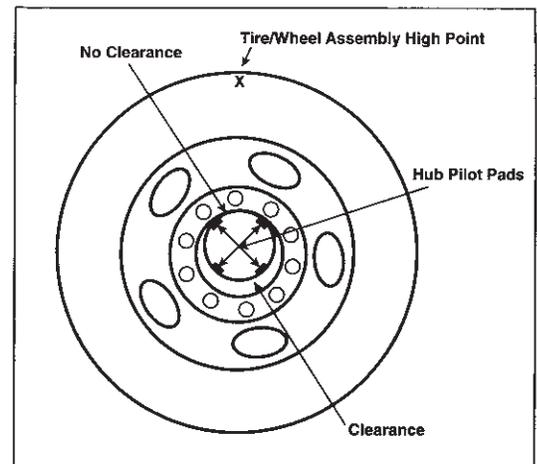


Figure 7

continues >>

If you have followed this procedure correctly, you will find there is clearance between the hub pads and the wheel pilot hole at the bottom and no clearance at the top (See Figure 7.) shown on previous page.

3. Recheck the radial runout to verify that it has been improved. By locating the high point, repositioning the wheel, putting the high point at the top and re-tightening, gravity should have put the wheel in a better position with

respect to the hub. Improvements up to .020" are common and can greatly improve the ride.

[Information reprinted with permission from: **RP 214B, Tire/Wheel Balance and Runout**, in **TMC's Recommended Practices Manual**, published by the Technology & Maintenance Council (TMC) of American Trucking Associations, 2200 Mill Road, Alexandria, VA 22314; (703) 838-1763. tmc.truckline.com]

Tire Mounting For Low Vibration


Special Low Vibration Mounting For Bridgestone Radial Truck Tires

All Bridgestone tires have yellow marks, to aid in initial balance. (White marks are factory inspection marks, and are not used in mounting or balancing).

Proper use of these marks during new tire mounting and installation can result in a better ride and less vehicle vibration.

Place the yellow mark next to the valve stem, regardless of wheel type. Torque wheel nuts with the yellow mark at the "12 o'clock" position.

On dual assemblies, regardless of tire marks, install tires on axles with valve stems approximately 180 degrees apart.

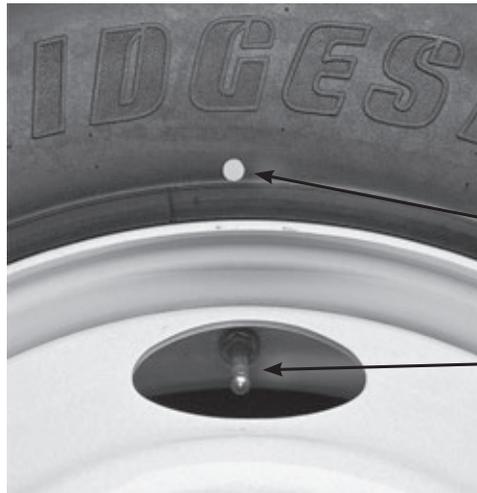

Mounting Radial Truck Tires to Help Reduce Vibration & Irregular Wear

Consistent, correct truck tire mounting is important for proper bead-to-wheel fit, and can help reduce vehicle vibration and irregular wear for better ride and longer original tread life.

Important steps:

1. Clean and paint used wheels.
2. Lubricate both tire beads and both wheel seats.
3. Check the assembly for even centering.

Always follow all OSHA, RMA and manufacturer's tire mounting safety precautions!

(See Section on Mounting/Demounting Procedures in this data book.)



1. Remove dirt, rust or corrosion that can interfere with proper seal or damage bead.



5. Inflate assembly to set bead and check for leaks around the wheel.




2. Protect bare metal with primer or anti-rust paint to prevent further corrosion. Allow to dry.



6. Measure distance from molded ring on tire to flange locations, 90 degrees apart.



3. Lubricate the wheel bead seat using vegetable oil-based lubricant approved for both tire and wheel.

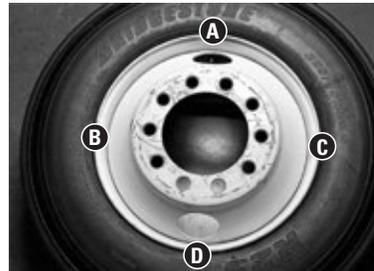

7. Distances A, B, C, and D should be within $2/32$ ". If they are not, break down, re-lubricate and mount again.



4. Lubricate tire bead. Do not use petroleum or solvent-based products. They cause rubber to deteriorate.

Storage

All tires should be stored in accordance with the following recommendations:

1. Avoid storing tires in direct sunlight.
2. Avoid storing tires near a heat source or in the path of a direct flow of forced air.
3. Keep tires away from electric motors and generators which produce ozone.
4. Do not store near petroleum products or chemicals (such as oil, grease, gasoline, solvent, etc.).
5. Limit vertical stacking to a maximum of 5 feet in height.
6. Store un-mounted tires indoors in a dry location. Steel radial tires may be severely damaged due to the presence of moisture inside the tire at mounting. Upon pressurization, this moisture can permeate the casing of the tire and cause severe deterioration of the steel cords.
7. Prior to mounting, inspect the inside surfaces of the tire and remove all foreign material and moisture.
8. Keep compressed air sources for tire inflation free of moisture.

Failure to follow the above recommendations could result in sudden tire failure, property damage and personal injury.

Tire Inspection

Prior to operating a vehicle, an inspection should be made of each tire, including the spare. Examine tires for cuts, bruises, cracks, bulges and penetrations. If any damage is found, have the tire examined by a Bridgestone dealer. Repair of tire damage must be made as soon as possible in order to avoid further deterioration of the tire structure.

Federal law requires that front axle truck tires on vehicles over 10,000 lbs. gross vehicle weight must have at least 4/32" tread depth. Tread wear indicators are contained in the tread of Bridgestone truck tires and become visible when the tread depth reaches 2/32" in two adjacent major grooves.

Drive and trailer tires should be replaced when the tread depth reaches 2/32" or the wear bars appear since 2/32" is the minimum permissible legal tread depth on all axles except the front.

Tires should also be inspected prior to mounting on a rim. Bridgestone steel radial tube-type truck tires are shipped with the flap in the tire. It is essential that the tire be disassembled and inspected thoroughly prior to mounting to insure the inside surfaces are completely dry and clean.

Water in casings of steel radial tires may cause tire failure. During normal operation, heat build-up inside the tire will turn water into vapor which may permeate the inner-liner and enter the steel casing cord, causing rust, deterioration, possible sudden tire failure, property damage and/or personal injury.

| | DOT Legal Limits |
|---------------|---------------------|
| Steering Axle | 4/32" |
| Drive Axle | 2/32" |
| Trailer Axle | 2/32" |

Irregular Wear of Radial Truck Tire

There are many factors that may trigger the occurrence of irregular wear. Among those, mechanical malfunctions of vehicles such as misalignment and uniformity of the tire and wheel assembly are the major factors. If, after correction of these problems is made, objectionable irregular wear is still observed, Bridgestone recommends the following steps be taken:

Steer-axle tires: Check thrust angle & apply higher inflation pressure within permissible range (100–115 psi).

Drive-axle tires: An increase of 10-15 psi makes the tire less susceptible to irregular wear. Forward movement of the fifth wheel within permissible range greatly reduces irregular wear.

Low Profile Tires

Low profile 75-series tubeless truck radial tires may offer several advantages over standard 90-series tubeless tires, such as:


1. Increased tread life
2. Positive handling
3. Lower vehicle height
4. Lighter weight

Care must be taken when converting to lower profile tires. Differences in overall diameter, static loaded radius and maximum load carrying capacity should be considered prior to mounting lower profile tires.

CONVERSION TO LOW PROFILE TIRES

Change In Overall Diameter

(FD663 Example)

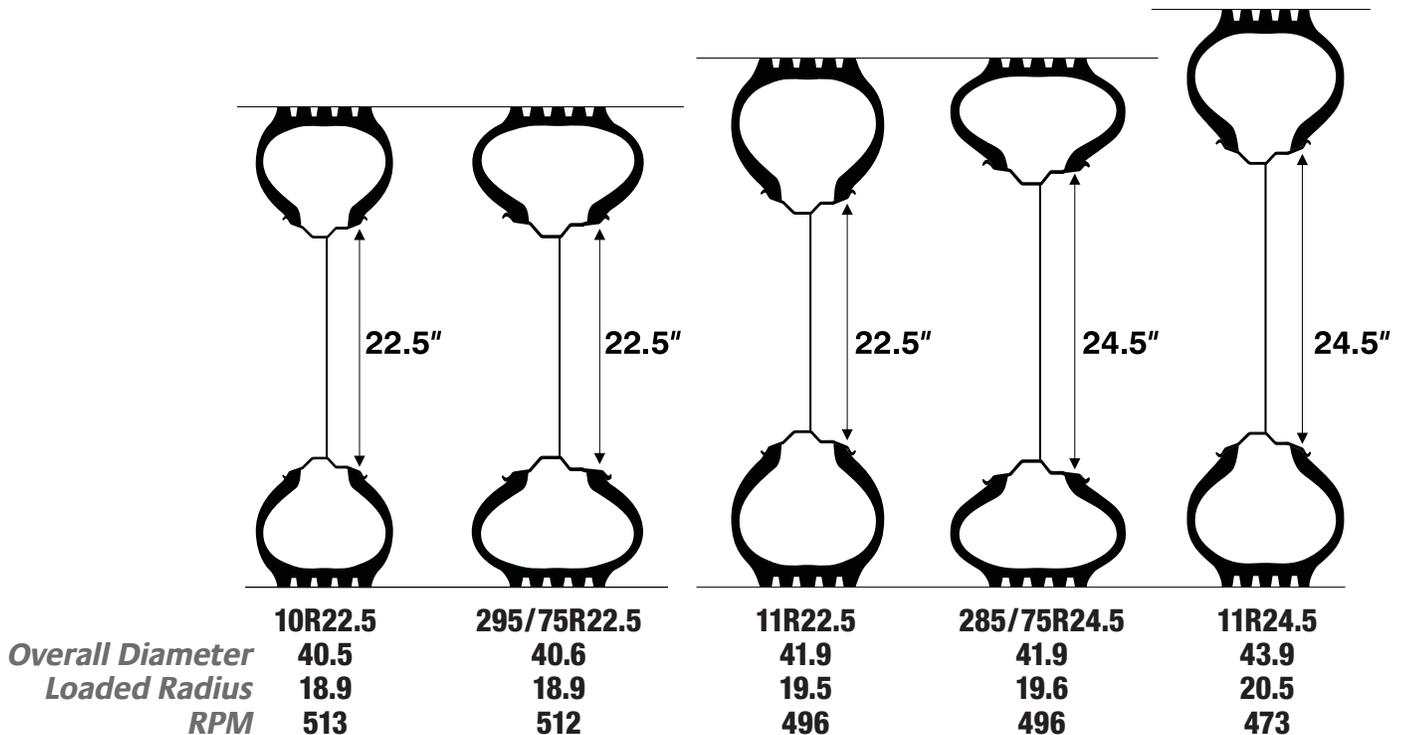

Mounting/Demounting Procedures

Proper mounting procedures must be followed or sudden tire destruction, personal injury or death may result. Tire mounting must be done only by personnel trained, supervised and equipped according to Federal OSHA regulations.

Demounting

Completely deflate tire by removing the valve core prior to removing the tire and wheel assembly from the truck.

Remove tire and wheel assembly from the vehicle and demount the tire from the wheel in the following manner:

Tube-type

- Ensure that the tire is completely deflated before removing from the rim. Place the tire on the floor, side-ring side up.
- Pry the bead loose from the lock ring using the proper tools.
- Disassemble the rim parts carefully to avoid damage to the tire, tube, flap or rim parts.
- Turn the wheel over and unseat the second bead from the wheel.
- Remove the rim from the tire.

Tubeless

- Ensure that the tire is completely deflated before removing from the rim.
- Break the beads loose on both sides of the tire using a bead-breaking tool.
- Lubricate both beads of the tire using a vegetable oil-based lubricant only.
- Place the tire and rim on the floor with the wide side of the rim down.
- Progressively work the tire off the rim using the proper tire irons.

Prior to Mounting

Clean and prepare rim or wheel – inspect the rim or wheel for damage. Cracked, broken, bent, or otherwise damaged rim components and wheels must not be reworked, welded, brazed or otherwise heated. Never weld a rim with a tire mounted on it or any other time.

Proper size tube and flaps (if applicable) must be installed in the tire. New Bridgestone tubes and flaps must be used when mounting new Bridgestone tube type tires. Never use undersized, oversized, or used tubes or flaps. Ensure that rim components are properly matched and that the proper size rim is being used (size, bead taper, etc.).

New valves, cores, caps, and O-rings should be installed with new tires. Never mount a damaged tire.

Mounting

Tube-type

- Remove the tube and flap from the tire (if installed). Clean and dry the inside of the tire to ensure that all moisture, dirt and foreign material is removed prior to mounting.
- Install the proper size tube and flap. Always install new Bridgestone radial tubes and radial flaps in new Bridgestone radial tires. Be sure tubes marked “radial” are used in radial tires. Place the tube inside the tire and install the flap, ensuring that the flap is centered. Slightly inflate the tube enough to shape it out.
- Lubricate the beads, rim side of the flap and the tube base with a vegetable-based lubricant. Do not over-lubricate (inside of tire must stay dry).
- Mount the tire, tube and flap assembly on the rim.
- Assemble the rim parts making sure proper components are used and a proper fit is established.
- When inflating, always place the tire in an approved safety cage or equivalent restraining device and use an extension hose and clip-on chuck.
- Never stand over a tire while inflating. Do not attempt to seat rim components by tapping with a mallet when tire is inflated.

Tubeless

- Clean and prepare rim or wheel.
- Replace valve seals and stem.
- Lubricate both beads and both rim flanges.
- Work the tire over the rim flanges using proper tubeless tire tools.
- Mount the tire over the valve side.
- Inflate tire in safety cage to seat beads.
- Do not exceed the maximum inflation pressures shown on tire sidewall/rim.

WARNING: When mounting truck tires, never use pressures above 40 psi to seat tire beads. If beads have not seated by the time pressure reaches 40 psi, deflate the assembly, reposition the tire on the rim, re-lubricate tire beads, rim humps, bead seat, and re-inflate.

Cautions

- Always inflate tire/rim assembly in an approved safety cage or equivalent restraining device, use remote controlled clip-on air hose, and inflate to pressure recommended by vehicle manufacturer.

- Always ensure that rim components fit properly before inflating.
- Never tap component parts with a mallet while the tire is inflated.
- Never attempt to disassemble multi-piece rims while inflated.
- Do not exceed the maximum inflation pressure on the sidewall of the tire. If beads do not seat at 40 psi, deflate, re-lubricate and re-inflate.

WARNING: Never pour or spray any flammable substance into or onto a tire or wheel for any purpose whatsoever. The residue left by the substance could result in a fire or explosion, which could cause an accident.

WARNING: Never pour or spray a flammable substance such as gasoline or ethyl ether into a tire and light with a match so that the resulting explosion seats the beads of a tubeless tire. This practice is extremely dangerous and can result in a severe explosion or undetected damage to the tire or rim which can cause severe injury or death.

WARNING: Always replace a tire on a rim with another tire of exactly the same bead diameter as the diameter of the rim on which it will be mounted.

Correct Rim Selection

Bridgestone tires are designed to be used on wheels and rims that conform to the dimensions and contours shown in the Tire and Rim Association Yearbook for the year in which the tire is manufactured and that are designed as approved wheels and rims for each particular tire size and type.

Usage of other wheels and rims must be expressly approved by Bridgestone Firestone North American Tire, LLC for the particular application involved.

The load and cold inflation pressure must not exceed the rim and wheel manufacturer's recommendations even though the tire may be approved for a higher load or inflation.


Rims and wheels may be identified (stamped) with a maximum load and maximum cold inflation rating. For rims and wheels not so identified or for service conditions exceeding the rated capacities, consult the rim and wheel manufacturer to determine rim and wheel capacities for the intended service.

Tire & Rim Matching Importance

Remember the importance of proper matching of tires and rims. In particular, special care must also be used in the mounting of any 16" diameter tire sizes, as well as the 15.5" and 17.5" sizes. The 16" size tire must be mounted only on the approved 16" rims and not the 15.5" or 16.5" rims. In addition, any 15" size tire must be mounted only on approved 15" rims, not a 15.5" rim and any 17" size tire must be mounted only on approved 17" rims, not on a 17.5" rim.

WARNING: There is a danger in installing a tire of one rim diameter on a rim of a different rim diameter. If attempts are made to mount and inflate a 15" diameter tire on a 15.5" rim, a 16" tire on a 16.5" rim, or a 17" tire on a 17.5" rim, serious injury or death may result.

Rims of different diameters and tapers cannot be interchanged. The following diagram illustrates the difference between rims of two different tapers and diameters:

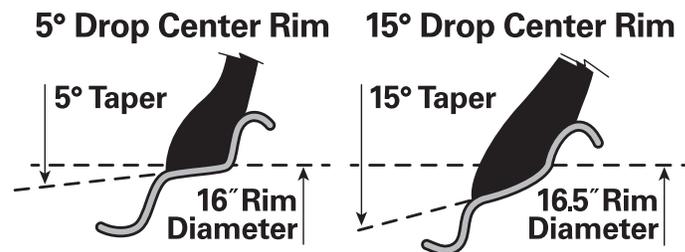

The following diagram shows how the beads of a 16" tire will not seat on a 16.5" rim. The beads should not be forced out against the rim flanges by using more air pressure, because this will break the beads and the tire will explode. Never exceed 40 psi when seating the beads on the rims.



Use of Lubricants In Mounting & Demounting of Truck/Bus Tires

Bridgestone does not recommend the use of petroleum products as a lubricant in tire mounting or demounting operations.

Only a vegetable oil-based lubricant should be used. Do not use solvents or petroleum products as lubricants for tire mounting or demounting.

In cases where a tire submitted for adjustment consideration for bead-related damages shows evidence of having been contaminated by petroleum lubricants or other non-recommended material, the adjustment will be disallowed by Bridgestone. The use of non-recommended (products or materials may result in deterioration of rubber and eventual failure of the tire.)

Acceptable lubricants such as Murphy's, Ru-Glyde, Sliptac, etc. are recommended for (mounting and demounting passenger and truck/bus tires.)

Tire Vibration

SAFETY WARNING: Serious injury or death may result from a tire failure. Many tire failures are preceded by vibration, bumps, bulges or other anomalies. If an unusual vibration occurs while driving your vehicle or you notice a bump, bulge, or an anomaly not associated with normal tire performance, have your tires and vehicle evaluated by a qualified service person.

Repair & Retreading

Improperly repaired or retreaded truck tires may cause sudden tire destruction.

Bridgestone truck tires should only be retreaded and repaired by trained personnel.

An inspection of each tire should be done before operating the vehicle. Damaged tires should be inspected by an authorized Bridgestone tire dealer.

A puncture left unrepaired may result in further internal casing damage and eventual tire destruction.

Never use plug-only repairs on Bridgestone truck tires. An interior patch with plug or other approved material is required. Nail hole repairs should be made only after demounting and inspecting the interior of the tire.

Never use a tube as a substitute for a proper tire repair.

Belt Removal

1. The removal of the fourth (outer) belt is permissible. This belt may be omitted when retreading.
2. The removal of the third belt is more involved. If it is essential that the third belt be removed, then it must be replaced before retreading.
3. A nail hole repair of 3/8" or less in diameter may be made in the crown area of either radial or bias tires. A section repair in a radial is required to repair any injury larger than a 3/8" nail hole.
4. Bias section repairs are made when the injury is either larger than 1-1/4" in diameter, is not perfectly round or perpendicular to the liner surface, or when the injury is larger than 3/8" in diameter and combination patch plugs are not used.



How much benefit can we get?

A fleet with average fuel economy of 5.0 miles per gallon that achieves a given percentage of fuel savings will save more fuel than a fleet with an average fuel economy of 7.0 miles per gallon.

Fleet size and annual miles also have an effect. The more fuel you use, the more you have to gain from any improvement.

| SAMPLE FUEL ECONOMY CALCULATIONS | | | | | | | |
|----------------------------------|------------|---------|---------|---------|------------|---------|---------|
| MILES PER YEAR | 100,000 | 100,000 | 100,000 | 100,000 | 100,000 | 100,000 | 100,000 |
| MILES PER GALLON | 5.0 | 5.5 | 6.0 | 6.5 | 7.0 | 7.5 | 8.0 |
| GALLONS PER YEAR | 20,000 | 18,182 | 16,667 | 15,385 | 14,286 | 13,333 | 12,500 |
| 1% Fuel Savings | 200 | 182 | 167 | 154 | 143 | 133 | 125 |
| 2% Fuel Savings | 400 | 364 | 333 | 308 | 286 | 267 | 250 |
| 5% Fuel Savings | 1,000 | 909 | 833 | 769 | 714 | 667 | 625 |
| 7% Fuel Savings | 1,400 | 1,273 | 1,167 | 1,077 | 1,000 | 933 | 875 |
| 10% Fuel Savings | 2,000 | 1,818 | 1,667 | 1,538 | 1,429 | 1,333 | 1,250 |

How do we know how much we're saving?

First, you have to know what your fuel economy is right now. Because it changes constantly, with weather, loads, roads, equipment and drivers, that may not be as simple as it sounds.

Scientific testing controls variables, but you may not have that kind of control in the real world.

And, in-truck on-board computers may not be your best guide. According to TMC, these displays can be in error plus or minus five percent.

According to TMC, on-board computer displays of fuel economy can be off by ±5%

One method that's real world is to take your fuel receipts and corresponding odometer readings, then divide miles by gallons. The more data you have, the more representative your "average" is going to be.

And remember, consider the cost of any fuel economy tactic. If it costs more than it saves, it's a bad investment.


Advanced computer methods

Your BCS representative has an innovative computer program that accurately compares the fuel economy of different tires, tires from different manufacturers, even retreads.

This program, *Tire Life Cycle Cost (TLCC)*, makes a true comparison by compensating for the fact that tire fuel economy changes constantly throughout tread life, and by accounting for differences in tire prices, casing values, installation costs and tread life.

TLCC will show you not only what the costs are, but what portion are for tread wear and what portion are for fuel consumed by the tires.

It's the most accurate "What if?"-way to select tires that will perform best. And only BCS has *TLCC*. Ask your representative to show you how much you can save.

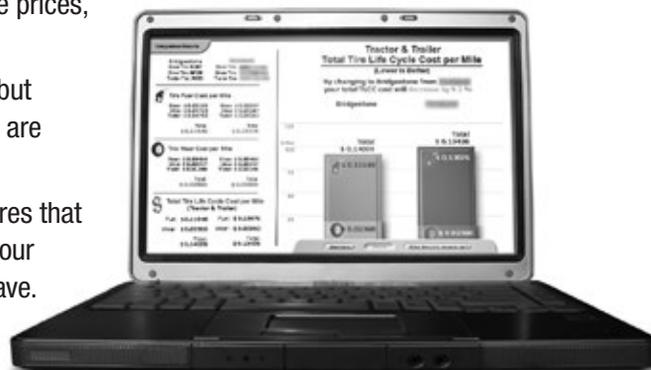

What consumes fuel?

SPEED

Every bit of energy produced or used by a truck comes from the fuel in the tank.

To move a truck, you must first run the engine to get power to the tires. With 40 percent engine efficiency, 60 percent of fuel is consumed through engine losses, the remaining 40 percent of fuel is consumed by tire rolling resistance, air resistance and all other mechanical losses. At 55 mph or below tire rolling resistance, air resistance and mechanical losses each account for about 33 percent of the 40 percent of fuel from the engine efficiency.


For example, increasing speed from 55 mph to 75 mph can take 39 percent more fuel, and much of that results from air resistance.

Speed affects other things too

In tests, vehicles went from 5.1 miles per gallon at 75 mph to 7.1 miles per gallon at 55 mph.

Speed also affects travel time, and therefore, the number of miles a driver can log each day. If you can meet delivery schedules without running out of hours of service, cutting speed can be an effective way to save fuel.

Fuel Economy at Different Speeds

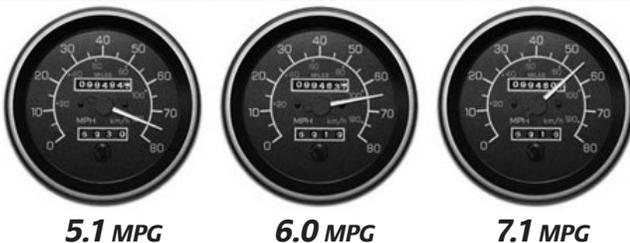


Fuel Economy & Travel Time at Different Speeds

Running at higher speeds can also have effects: Tire fuel efficiency, even with fuel-efficient tires, is severely cut.

And, engine manufacturers estimate maintenance costs may be 10-15 percent higher, while tire wear can be shortened by 10 to 30 percent.

| SPEED | MILES PER GALLON | INCREASE IN MILES PER GALLON | PERCENT FUEL SAVED | TIME FOR 500 MILES OF TRAVEL | INCREASE IN TRAVEL TIME |
|-------|------------------|------------------------------|--------------------|------------------------------|-------------------------|
| 75 | 5.1 | — | — | 6 hr. 40 min. | — |
| 65 | 6.0 | 18% | 15% | 7 hr. 42 min. | 15.5% |
| 55 | 7.1 | 39% | 28.2% | 9 hr. 5 min. | 36.2% |

Effect of Speed on Fuel Efficiency Factors

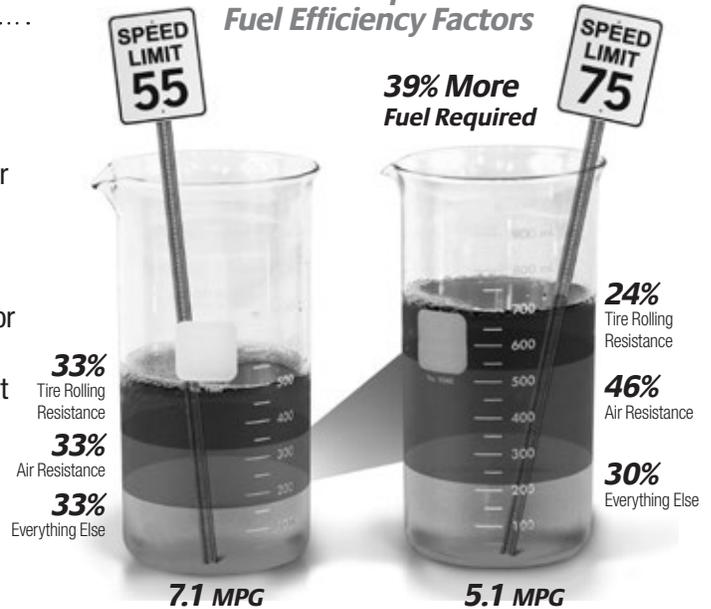

LOAD

No one would reduce payload as a way to save fuel, but there are ways to increase payload – by decreasing non-paying load.

Wide base tires weigh significantly less than dual pairs. With some cargoes, this can allow increased payload, and more revenue.

If the tires they replace were not fuel-efficient, wide base tires may also contribute to fuel economy.



WIDE BASE
181 lb per TIRE

LOW PROFILE
250 lb per PAIR

Wide base tires can allow weight savings to be converted into revenue-producing payload and may be more fuel-efficient than ordinary dual assemblies.

Tire Contributions to the Fuel Bill


Of the fuel used in moving the vehicle, about 1/4 to 1/3 of it is used to overcome rolling resistance. So if rolling resistance decreases by 10 percent the result is about (1/4 x 10% =) 2.5% to (1/3 x 10% =) 3% decrease in fuel consumption.

What consumes fuel?

continued

ROLLING RESISTANCE

The tread contributes about 35-50 percent of the tire's overall rolling resistance, while the casing contributes about 50 to 65 percent.

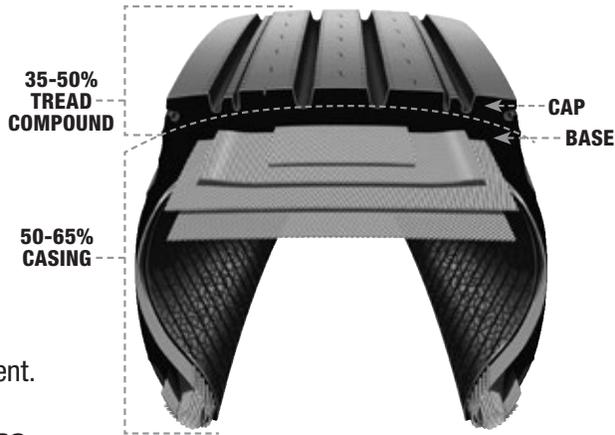


Wear effect on rolling resistance

Since the contribution of the tread is large, as the tread wears away, rolling resistance decreases.

As they approach wear-out, many tires become very similar in rolling resistance, even if they started out quite different.

That's one reason the BCS TLCC program uses true average rolling resistance – not new-tire rolling resistance – to calculate tire fuel consumption.

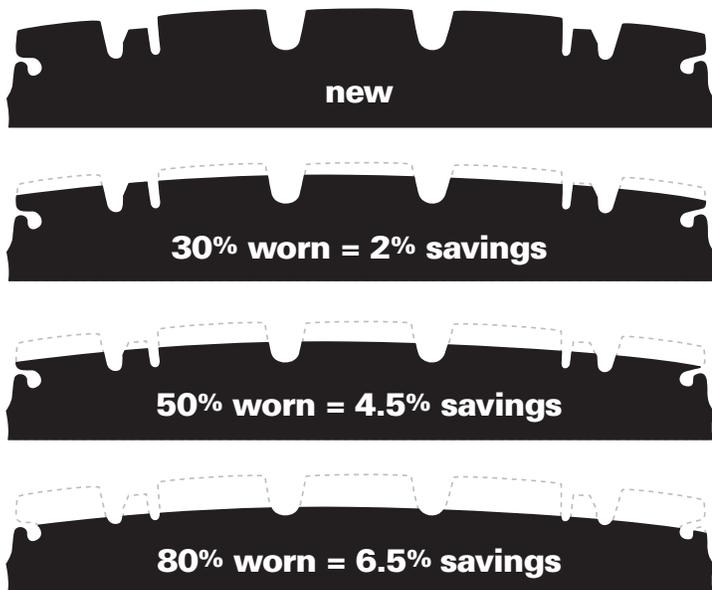

Tread design

Tread design also affects rolling resistance. In general, rib-type designs are more fuel-efficient than block- or lug-types. And, a tire with a shallower tread tends to be more fuel-efficient.

With drive tires, designs incorporating continuous shoulder ribs are so resistant to irregular wear that designers can use very fuel-efficient tread compounds.

Computer analysis, like that of the BCS TLCC program, can help you decide which tires deliver the best fuel efficiency.

Fuel economy with retreads


If only the tread is modified to produce fuel economy, the fuel efficiency of the tire may end when it is retreaded, unless it's retreaded with a fuel-efficient tread.

Fortunately, there are a number of fuel-efficient retread materials available offering fuel economy comparable to that of the best new tires, but at a fraction of their cost.

In addition, many BCS casings are specially constructed for fuel efficiency, and when retreaded – especially when capped with a fuel-efficient tread – may help to improve fuel economy.

Inflation pressure effects

Inflation pressure effects are relatively small, but you can expect about a 2 percent improvement in fuel efficiency over a range of 20 PSI below to 20 PSI above recommended pressure.

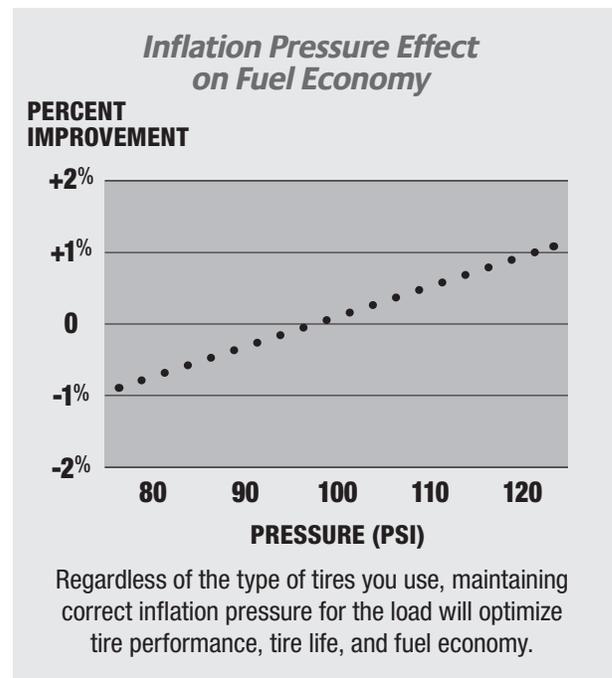


Position contribution to fuel economy

In general, the contribution of the tires on any given axle to overall vehicle fuel efficiency is roughly determined by the amount of load on that axle.

In general, trailer tires make the largest contribution.

If you are evaluating tires, you should probably try fuel-efficient trailer tires first. If that doesn't work, changing drive and steer tires probably won't either.

Axle Weight Distribution & Position Contribution to Fuel Economy

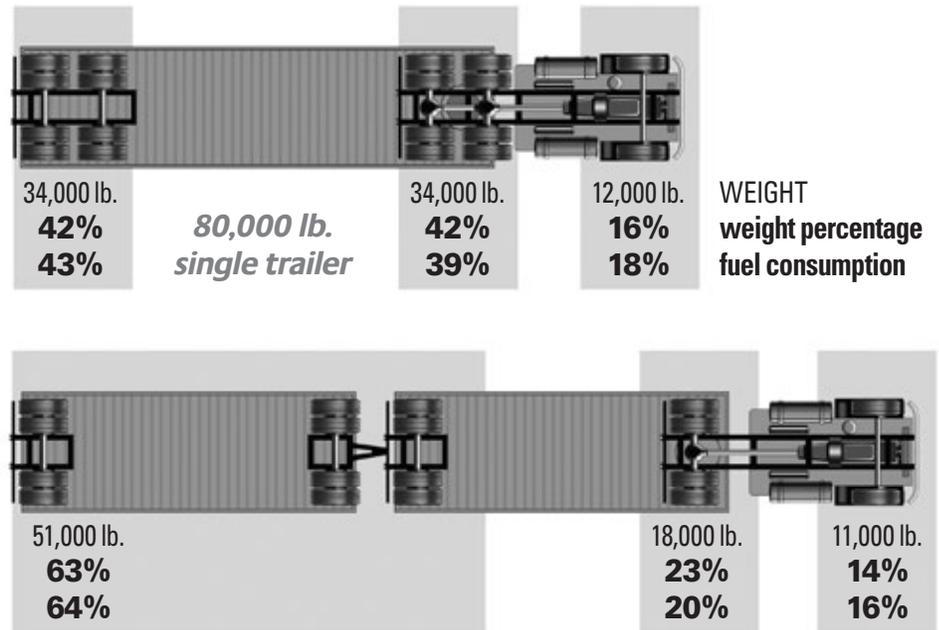

What effect can fuel-efficient tires have?

Generally you will only see about half of the scientific test results in the real world. Much of this is because of interference by other factors outside the controlled variables of testing.

So, any fuel economy method that does not produce at least a 2-percent improvement in controlled testing will probably not produce a measurable real-world effect.

Taking action

BCS recommends you conduct your own tests to determine whether your investment will achieve a satisfactory return.

Comparing fuel receipts with odometer readings is something you can do yourself, on an ongoing basis, to see if your fuel economy program is working.

Try TLCC

Remember, only BCS has the **Tire Life Cycle Cost (TLCC)** program, to help you make informed tire choices.

Your BCS representative will help you analyze your current tires (even if they are from BCS competitors), and recommend tires that will produce the lowest overall tire and fuel cost over their useful life.

Here are some steps to take:

Recommendations

- 1 Test things yourself:** If you can't convince yourself and your accountant, what you're saving may be too small to stand out from the "noise."
- 2 Limit your investment:** Try trailer tires first, or better still, try fuel-efficient trailer retreads first.
- 3 Consider all the variables:** Fuel-efficient duals may save just as much fuel as wide base tires, without forcing you to buy new wheels. If you can't benefit from the weight savings, why spend the money?
- 4 Try other methods:** Driver behavior has a big effect on fuel economy. Driver training or incentives may be a better investment than new equipment.
- 5 Examine your priorities:** Make sure everyone is on board. If one department is trying to save fuel and another is trying to cut tire costs, they may be working against each other.
- 6 Call for help:** Your tire supplier can help you with advice and in conducting tests. Call BCS for assistance at 1-800-847-3272.

Truck Type by Weight Class

| | | | |
|---|---|---|--|
| <p>CLASS 1 6,000 lb & less</p> |  Utility Van  Pick-up |  Compact Van  Multi-purpose |  Van |
| <p>CLASS 2 6,001-10,000 lb</p> |  Utility Van  Pick-up |  Compact Van  Walk-in |  Doubles |
| <p>CLASS 3 10,001-14,000 lb</p> |  Milk Bread  Compact Van |  Walk-in |  Liquid Tanker |
| <p>CLASS 4 14,001-16,000 lb</p> |  Conventional Van  Large Walk-in | |  Dry Bulk |
| <p>CLASS 5 16,001-19,500 lb</p> |  Rack  Large Walk-in |  Tree Specialist |  Logger |
| <p>CLASS 6 19,501-26,000 lb</p> |  Furniture  Coe Van |  School  Single Axle Van |  Platform |
| <p>CLASS 7 26,001-33,000 lb</p> |  Home Fuel  Trash |  Transit  Medium Conventional |  Drop Frame |
| <p>CLASS 8 33,001 lb & over</p> |  Dump  Cement |  Extra Heavy Tandem Conventional  Coe Sleeper |  Dump |
| | | |  Reefer |
| | | |  Deep Drop |
| | | |  Auto Trans |

Note: Trailer weight not listed.

Load & Inflation Tables

| | |
|--|---------|
| Medium Truck Tires | 64 - 67 |
| <i>Radial Ply Metric Tires on 15° Drop Center Rims</i> | 64 - 65 |
| <i>Radial Ply Metric Wide Base Tires as Singles</i> | 65 |
| <i>Radial Ply Tires on 15° Drop Center Rims</i> | 66 - 67 |
| Commercial Light Truck Tires | 68 - 71 |
| <i>Radial Ply Metric Tires on 5° Drop Center Rims</i> | 68 - 69 |
| <i>Radial Ply Tires on 5° Drop Center Rims</i> | 70 |
| <i>Diagonal Bias Ply Tires on 5° Drop Center Rims</i> | 70 |
| <i>Radial Ply Tires on 5° Drop Center Rims</i> | 71 |

Medium Truck Tires

Radial Ply **METRIC** Tires for Trucks, Buses & Trailers Used in Normal Highway Service

TIRES MOUNTED ON 15° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures (Pressure Listed is the Minimum for the Load) | | | | | | | | | | | | |
|---------------------------------------|--------|--|------|------|-------------------------------|------|------|-------------------------------|------|------|-------------------------------|------|------|------------------------|
| | | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 | 860 |
| | | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 |
| 215/75R17.5 FS560 PLUS ONLY | DUAL | kg. | | | 1450 | 1520 | 1590 | 1650 | 1720 | 1790 | 1860 | 1910 | 1990 | 2060(H) ¹³³ |
| | | lb. | | | 3195 | 3350 | 3500 | 3645 | 3795 | 3945 | 4095 | 4220 | 4390 | 4540(H) |
| | SINGLE | kg. | | | 1530 | 1610 | 1680 | 1750 | 1820 | 1900 | 1960 | 2040 | 2110 | 2180(H) ¹³⁵ |
| | | lb. | | | 3375 | 3540 | 3695 | 3860 | 4010 | 4180 | 4330 | 4495 | 4650 | 4805(H) |
| 225/70R19.5 | DUAL | kg. | 1230 | 1300 | 1360(E) ¹¹⁹ | 1410 | 1470 | 1550(F) ¹²³ | 1580 | 1640 | 1700(G) ¹²⁶ | | | |
| | | lb. | 2720 | 2860 | 3000(E) | 3115 | 3245 | 3415(F) | 3490 | 3615 | 3750(G) | | | |
| | SINGLE | kg. | 1310 | 1380 | 1450(E) ¹²¹ | 1500 | 1570 | 1650(F) ¹²⁵ | 1690 | 1740 | 1800(G) ¹²⁸ | | | |
| | | lb. | 2895 | 3040 | 3195(E) | 3315 | 3450 | 3640(F) | 3715 | 3845 | 3970(G) | | | |
| 245/70R19.5 FS561 | DUAL | kg. | | | 1550 | 1590 | 1660 | 1750(F) ¹²⁷ | 1790 | 1850 | 1950(G) ¹³¹ | | | |
| | | lb. | | | 3415 | 3515 | 3655 | 3860(F) | 3940 | 4075 | 4300(G) | | | |
| | SINGLE | kg. | | | 1600 | 1700 | 1770 | 1850(F) ¹²⁹ | 1900 | 1970 | 2060(G) ¹³³ | | | |
| | | lb. | | | 3640 | 3740 | 3890 | 4080(F) | 4190 | 4335 | 4540(G) | | | |
| 245/70R19.5 FS561 | DUAL | kg. | | | | 1590 | 1660 | 1750 | 1790 | 1850 | 1985(G) ¹³¹ | | | |
| | | lb. | | | | 3515 | 3655 | 3860 | 3940 | 4075 | 4375(G) | | | |
| | SINGLE | kg. | | | | 1700 | 1770 | 1850 | 1900 | 1970 | 2060(G) ¹³³ | | | |
| | | lb. | | | | 3740 | 3890 | 4080 | 4190 | 4335 | 4545(G) | | | |

| TIRE SIZE DESIGNATION | USAGE | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 |
|----------------------------------|--------|-----|------|------|------|------|------|-------------------------------|------|------|-------------------------------|------|-------------------------------|
| | | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| | | | | | | | | | | | | | |
| 255/70R22.5 | DUAL | kg. | | | 1800 | 1860 | 1940 | 2000 | 2020 | 2090 | 2120(G) ¹³⁴ | 2230 | 2300(H) ¹³⁷ |
| | | lb. | | | 3970 | 4110 | 4275 | 4410 | 4455 | 4610 | 4675(G) | 4915 | 5070(H) |
| | SINGLE | kg. | | | 1900 | 1980 | 2060 | 2120 | 2220 | 2300 | 2360(G) ¹³⁸ | 2450 | 2500(H) ¹⁴⁰ |
| | | lb. | | | 4190 | 4370 | 4550 | 4675 | 4895 | 5065 | 5205(G) | 5400 | 5510(H) |
| 275/70R22.5 | DUAL | kg. | | | | 2180 | 2300 | 2430 | 2500 | 2575 | 2725 | 2800 | 2900(H) ¹⁴⁵ |
| | | lb. | | | | 4805 | 5070 | 5355 | 5510 | 5675 | 6005 | 6175 | 6395(H) |
| | SINGLE | kg. | | | | 2430 | 2500 | 2650 | 2725 | 2900 | 3000 | 3075 | 3175(H) |
| | | lb. | | | | 5355 | 5510 | 5840 | 6005 | 6395 | 6610 | 6940 | 7000(H) |
| 295/75R22.5 | DUAL | kg. | 1860 | 1950 | 2060 | 2130 | 2220 | 2300(F) ¹³⁷ | 2390 | 2470 | 2575(G) ¹⁴¹ | 2630 | 2725(H) ¹⁴³ |
| | | lb. | 4095 | 4300 | 4540 | 4690 | 4885 | 5070(F) | 5260 | 5440 | 5675(G) | 5795 | 6005(H) |
| | SINGLE | kg. | 2040 | 2140 | 2240 | 2340 | 2440 | 2500(F) ¹⁴⁰ | 2620 | 2710 | 2800(G) ¹⁴⁴ | 2890 | 3000(H) ¹⁴⁸ |
| | | lb. | 4500 | 4725 | 4940 | 5155 | 5370 | 5510(F) | 5780 | 5980 | 6175(G) | 6370 | 6610(H) |
| 295/75R22.5 FS591 ONLY | DUAL | kg. | 1860 | 1950 | 2060 | 2130 | 2220 | 2300(F) ¹³⁷ | 2390 | 2470 | 2575(G) ¹⁴¹ | 2870 | 3000(H) ¹⁴⁸ |
| | | lb. | 4095 | 4300 | 4540 | 4690 | 4885 | 5070(F) | 5260 | 5440 | 5675(G) | 6330 | 6610(H) |
| | SINGLE | kg. | 2040 | 2140 | 2240 | 2340 | 2440 | 2500(F) ¹⁴⁰ | 2620 | 2710 | 2800(G) ¹⁴⁴ | 3150 | 3250(H) ¹⁴⁹ |
| | | lb. | 4500 | 4725 | 4940 | 5155 | 5370 | 5510(F) | 5780 | 5980 | 6175(G) | 6950 | 7160(H) |

| TIRE SIZE DESIGNATION | USAGE | kPa | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 | 860 | 900 |
|--|--------|-----|-----|------|------|------|------|------|------|------|------|------|----------------|
| | | psi | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 | 130 |
| | | | | | | | | | | | | | |
| 275/70R22.5 FS561 PLUS Load Range "J" Only | DUAL | kg. | | 2235 | 2334 | 2417 | 2483 | 2545 | 2625 | 2685 | 2765 | 2825 | 2900(J) |
| | | lb. | | 4925 | 5145 | 5327 | 5470 | 5610 | 5785 | 5915 | 6095 | 6225 | 6395(J) |
| | SINGLE | kg. | | 2425 | 2533 | 2627 | 2696 | 2764 | 2852 | 2918 | 3005 | 3067 | 3150(J) |
| | | lb. | | 5345 | 5580 | 5790 | 5940 | 6090 | 6285 | 6430 | 6620 | 6760 | 6940(J) |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum.

International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Medium Truck Tires

Radial Ply **METRIC** Tires for Trucks, Buses & Trailers Used in Normal Highway Service

TIRES MOUNTED ON 15° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures (Pressure Listed is the Minimum for the Load) | | | | | | | | | | | |
|-----------------------------|--------|--|------------|------------|------------|------------|------------|-------------------------------|------------|------------|-------------------------------|------------|-------------------------------|
| | | kPa | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 | 860 | 900 |
| | | psi | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 | 130 |
| 315/80R22.5 | Dual | kg. | 2575 | 2650 | 2750 | 2900 | 2970 | 3070 | 3150 | 3270 | 3450(J) ¹⁵¹ | 3590 | 3750(L) ¹⁵⁴ |
| | | lb. | 5675 | 5840 | 6070 | 6395 | 6545 | 6770 | 6940 | 7210 | 7610(J) ¹⁵¹ | 7910 | 8270(L) ¹⁵⁴ |
| | Single | kg. | 2800 | 2910 | 3030 | 3150 | 3260 | 3370 | 3450 | 3590 | 3750(J) ¹⁵⁴ | 3940 | 4125(L) ¹⁵⁷ |
| | | lb. | 6175 | 6415 | 6670 | 6940 | 7190 | 7440 | 7610 | 7920 | 8270(J) ¹⁵⁴ | 8690 | 9090(L) ¹⁵⁷ |
| 315/80R22.5 FS400 | Dual | kg. | 2575 | 2650 | 2750 | 2900 | 2970 | 3070 | 3150 | 3270 | 3450(J) ¹⁵¹ | 3725 | 4000(L) ¹⁵⁶ |
| | | lb. | 5675 | 5840 | 6070 | 6395 | 6545 | 6770 | 6940 | 7210 | 7610(J) ¹⁵¹ | 8215 | 8820(L) ¹⁵⁶ |
| | Single | kg. | 2800 | 2910 | 3030 | 3150 | 3260 | 3370 | 3450 | 3590 | 3750(J) ¹⁵⁴ | 4000 | 4250(L) ¹⁵⁸ |
| | | lb. | 6175 | 6415 | 6670 | 6940 | 7190 | 7440 | 7610 | 7920 | 8270(J) ¹⁵⁴ | 8820 | 9370(L) ¹⁵⁸ |
| 285/75R24.5 | DUAL | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 |
| | | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| | | kg. | 1870 | 1970 | 2060 | 2150 | 2240 | 2360(F) ¹³⁸ | 2410 | 2490 | 2575(G) ¹⁴¹ | 2660 | 2800(H) ¹⁴⁴ |
| | | lb. | 4135 | 4340 | 4540 | 4740 | 4930 | 5205(F) ¹³⁸ | 5310 | 5495 | 5675(G) ¹⁴¹ | 5860 | 6175(H) ¹⁴⁴ |
| | SINGLE | kg. | 2060 | 2160 | 2240 | 2360 | 2460 | 2575(F) ¹⁴¹ | 2650 | 2740 | 2800(G) ¹⁴⁴ | 2920 | 3075(H) ¹⁴⁷ |
| | | lb. | 4545 | 4770 | 2240 | 2360 | 2460 | 5675(F) ¹⁴¹ | 5835 | 6040 | 6175(G) ¹⁴⁴ | 6440 | 6780(H) ¹⁴⁷ |

METRIC WIDE BASE Radial Tires for Trucks, Buses & Trailers Used in Normal Highway Service

TIRES ARE USED AS SINGLES

| TIRE SIZE DESIGNATION | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures (Pressure Listed is the Minimum for the Load) | | | | | | | | | | | |
|-----------------------|--|------|------|------|------|------|-------|-------|-------|-------------------------------|-------|--------------------------------|
| | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 |
| | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| 385/65R22.5 | kg. | 2880 | 3060 | 3150 | 3350 | 3470 | 3650 | 3740 | 3850 | 4000 | 4100 | 4250(J) ¹⁵⁸ |
| | lb. | 6380 | 6720 | 6940 | 7350 | 7650 | 8050 | 8230 | 8510 | 8820 | 9050 | 9370(J) ¹⁵⁸ |
| 425/65R22.5 | kg. | 3430 | 3640 | 3750 | 3980 | 4130 | 4250 | 4440 | 4580 | 4750(J) ¹⁶² | 4880 | 5150(L) ¹⁶⁵ |
| | lb. | 7590 | 7990 | 8270 | 8740 | 9100 | 9370 | 9790 | 10100 | 10500 | 10700 | 11400(L) ¹⁶⁵ |
| 445/65R22.5 | kg. | 3720 | 3950 | 4125 | 4320 | 4470 | 4625 | 4820 | 4960 | 5150 | 5290 | 5600(L) ¹⁶⁸ |
| | lb. | 8230 | 8660 | 9090 | 9480 | 9870 | 10200 | 10600 | 11000 | 11400 | 11700 | 12300(L) ¹⁶⁸ |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum. International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Medium Truck Tires

Radial Ply Tires for Trucks, Buses & Trailers Used in Normal Highway Service

TIRES MOUNTED ON 15° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures (Pressure Listed is the Minimum for the Load) | | | | | | | | | | | |
|-----------------------|--------|--|------------------------------|------|------|------------------------------|------|------|------------------------------|-----|-----|-----|-----|
| | | kPa | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 | 860 | 900 | 930 |
| | | psi | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 | 125 | 130 | 135 |
| 10R17.5HC | DUAL | kg. | 1650(E)₁₂₅ | 1720 | 1790 | 1850(F)₁₂₉ | 1920 | 1990 | 2060(G)₁₃₃ | | | | |
| | | lb. | 3640(E) | 3785 | 3930 | 4080(F) | 4235 | 4390 | 4540(G) | | | | |
| | SINGLE | kg. | 1750(E)₁₂₇ | 1820 | 1890 | 1950(F)₁₃₁ | 2030 | 2110 | 2180(G)₁₃₅ | | | | |
| | | lb. | 3860(E) | 4005 | 4150 | 4300(F) | 4470 | 4640 | 4805(G) | | | | |

| TIRE SIZE DESIGNATION | USAGE | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 |
|-----------------------|--------|------|------|------|----------------|------------------------------|------------------------------|----------------|------------------------------|------------------------------|----------------|------------------------------|------------------------------|
| | | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| | | kg. | 1480 | 1550 | 1610 | 1670 | 1750(E)₁₂₇ | 1820 | 1890 | 1950(F)₁₃₁ | 2010 | 2070 | 2120(G)₁₃₄ |
| lb. | 3270 | 3410 | 3550 | 3690 | 3860(E) | 4005 | 4150 | 4300(F) | 4425 | 4550 | 4675(G) | | |
| 9R22.5 | DUAL | kg. | 1530 | 1610 | 1690 | 1760 | 1850(E)₁₂₉ | 1920 | 1990 | 2060(F)₁₃₃ | 2120 | 2180 | 2240(G)₁₃₆ |
| | | lb. | 3370 | 3560 | 3730 | 3890 | 4080(E) | 4235 | 4390 | 4540(F) | 4675 | 4810 | 4940(G) |
| | SINGLE | kg. | 1750 | 1830 | 1910 | 2000(E)₁₃₂ | 2080 | 2160 | 2240(F)₁₃₈ | 2300 | 2360 | 2430(G)₁₃₉ | |
| | | lb. | 3860 | 4045 | 4230 | 4410(E) | 4585 | 4760 | 4940(F) | 5075 | 5210 | 5355(G) | |
| 10R22.5 | DUAL | kg. | 1850 | 1940 | 2030 | 2120(E)₁₃₄ | 2200 | 2280 | 2360(F)₁₃₈ | 2430 | 2500 | 2575(G)₁₄₁ | |
| | | lb. | 4080 | 4280 | 4480 | 4675(E) | 4850 | 5025 | 5205(F) | 5360 | 5515 | 5675(G) | |
| | SINGLE | kg. | 1990 | 2080 | 2160 | 2250 | 2360(F)₁₃₈ | 2460 | 2560 | 2650(G)₁₄₂ | 2680 | 2710 | 2725(H)₁₄₃ |
| | | lb. | 4380 | 4580 | 4760 | 4950 | 5205(F) | 5415 | 5625 | 5840(G) | 5895 | 5950 | 6005(H) |
| 11R22.5 | DUAL | kg. | 2050 | 2160 | 2260 | 2370 | 2500(F)₁₄₀ | 2600 | 2700 | 2800(G)₁₄₄ | 2870 | 2940 | 3000(H)₁₄₆ |
| | | lb. | 4560 | 4770 | 4990 | 5220 | 5510(F) | 5730 | 5950 | 6175(G) | 6320 | 6465 | 6610(H) |
| | SINGLE | kg. | 2110 | 2210 | 2300 | 2390 | 2500(F)₁₄₀ | 2580 | 2660 | 2725(G)₁₄₃ | 2820 | 2910 | 3000(H)₁₄₆ |
| | | lb. | 4660 | 4870 | 5070 | 5260 | 5510(F) | 5675 | 5840 | 6005(G) | 6205 | 6405 | 6610(H) |
| 11R24.5 | DUAL | kg. | 2190 | 2300 | 2410 | 2520 | 2650(F)₁₄₂ | 2770 | 2890 | 3000(G)₁₄₆ | 3080 | 3160 | 3250(H)₁₄₉ |
| | | lb. | 4820 | 5070 | 5310 | 5550 | 5840(F) | 6095 | 6350 | 6610(G) | 6790 | 6970 | 7160(H) |
| | SINGLE | kg. | 2170 | 2260 | 2350 | 2440 | 2575(F)₁₄₁ | 2630 | 2680 | 2725(G)₁₄₃ | 2840 | 2960 | 3075(H)₁₄₇ |
| | | lb. | 4780 | 4990 | 5190 | 5390 | 5675(F) | 5785 | 5895 | 6005(G) | 6265 | 6525 | 6780(H) |
| 12R22.5 | DUAL | kg. | 2240 | 2360 | 2470 | 2580 | 2725(F)₁₄₃ | 2820 | 2910 | 3000(G)₁₄₆ | 3120 | 3240 | 3350(H)₁₅₀ |
| | | lb. | 4940 | 5000 | 5450 | 5690 | 6005(F) | 6205 | 6405 | 6610(G) | 6870 | 7130 | 7390(H) |
| | SINGLE | kg. | 2300 | 2400 | 2500 | 2600 | 2650(F)₁₄₂ | 2770 | 2890 | 3000(G)₁₄₆ | 3080 | 3160 | 3250(H)₁₄₉ |
| | | lb. | 5080 | 5300 | 5520 | 5730 | 5840(F) | 6095 | 6350 | 6610(G) | 6790 | 6970 | 7160(H) |
| 12R24.5 | DUAL | kg. | 2380 | 2500 | 2630 | 2740 | 2900(F)₁₄₅ | 3020 | 3140 | 3250(G)₁₅₂ | 3350 | 2450 | 3550(H)₁₅₂ |
| | | lb. | 5240 | 5520 | 5790 | 6040 | 6395(F) | 6650 | 6910 | 7160(G) | 7380 | 7600 | 7830(H) |
| | SINGLE | kg. | 2300 | 2400 | 2500 | 2600 | 2650(F)₁₄₂ | 2770 | 2890 | 3000(G)₁₄₆ | 3080 | 3160 | 3250(H)₁₄₉ |
| | | lb. | 5080 | 5300 | 5520 | 5730 | 5840(F) | 6095 | 6350 | 6610(G) | 6790 | 6970 | 7160(H) |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum. International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Medium Truck Tires

Radial Ply Tires for Trucks, Buses & Trailers Used in Normal Highway Service

| TIRES MOUNTED ON 15° DROP CENTER RIMS | | | | | | | | | | | | | |
|---------------------------------------|--------|--|-------------------------------|------|------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures (Pressure Listed is the Minimum for the Load) | | | | | | | | | | | |
| | | kPa | 480 | 520 | 550 | 590 | 620 | 660 | 690 | 720 | 760 | 790 | 830 |
| | | psi | 70 | 75 | 80 | 85 | 90 | 95 | 100 | 105 | 110 | 115 | 120 |
| 9.00R20 | DUAL | kg. | 1750(D) ¹²⁷ | 1830 | 1910 | 2000(E) ¹³² | 2080 | 2160 | 2240(F) ¹³⁶ | 2300 | 2360 | 2430(G) ¹³⁹ | |
| | | lb. | 3860(D) | 4045 | 4230 | 4410(E) | 4585 | 4760 | 4940(F) | 5080 | 5220 | 5355(G) | |
| | SINGLE | kg. | 1850(D) ¹²⁹ | 1940 | 2030 | 2120(E) ¹³⁴ | 2200 | 2280 | 2360(F) ¹³⁸ | 2430 | 2500 | 2575(G) ¹⁴¹ | |
| | | lb. | 4080(D) | 4280 | 4480 | 4675(E) | 4850 | 5025 | 5205(F) | 5360 | 5515 | 5675(G) | |
| 9.00R20 T546 ONLY | DUAL | kg. | 1750 | 1830 | 1910 | 2000 | 2080 | 2160 | 2240 | 2250(G) | | | |
| | | lb. | 3860 | 4045 | 4230 | 4410 | 4585 | 4760 | 4940 | 4970(G) | | | |
| | SINGLE | kg. | 1850 | 1940 | 2030 | 2120 | 2200 | 2280 | 2360 | 2430 | 2500 | 2570(G) | |
| | | lb. | 4080 | 4280 | 4480 | 4675 | 4850 | 5025 | 5205 | 5360 | 5515 | 5670(G) | |
| 10.00R20 | DUAL | kg. | 1990 | 2080 | 2160 | 2250 | 2360(F) ¹³⁸ | 2460 | 2560 | 2650(G) ¹⁴² | 2680 | 2710 | 2725(H) ¹⁴³ |
| | | lb. | 4380 | 4580 | 4760 | 4950 | 5205(F) | 5415 | 5625 | 5840(G) | 5895 | 5950 | 6005(H) |
| | SINGLE | kg. | 2050 | 2160 | 2260 | 2370 | 2500(F) ¹⁴⁰ | 2600 | 2700 | 2800(G) ¹⁴⁴ | 2870 | 2940 | 3000(H) ¹⁴⁶ |
| | | lb. | 4530 | 4770 | 4990 | 5220 | 5510(F) | 5730 | 5950 | 6175(G) | 6320 | 6465 | 6610(H) |
| 11.00R20 | DUAL | kg. | 2170 | 2260 | 2360 | 2450 | 2575(F) ¹⁴¹ | 2630 | 2680 | 2725(G) ¹⁴³ | 2840 | 2960 | 3075(H) ¹⁴⁷ |
| | | lb. | 4780 | 4990 | 5190 | 5390 | 5675(F) | 5785 | 5895 | 6005(G) | 6265 | 6525 | 6780(H) |
| | SINGLE | kg. | 2240 | 2360 | 2470 | 2580 | 2725(F) ¹⁴³ | 2820 | 2910 | 3000(G) ¹⁴⁶ | 3120 | 3240 | 3350(H) ¹⁵⁰ |
| | | lb. | 4940 | 5200 | 5450 | 5690 | 6005(F) | 6205 | 6405 | 6610(G) | 6870 | 7130 | 7390(H) |
| 11.00R22 | DUAL | kg. | 2300 | 2400 | 2500 | 2600 | 2650(F) ¹⁴² | 2770 | 2890 | 3000(G) ¹⁴⁶ | 3080 | 3160 | 3250(H) ¹⁴⁹ |
| | | lb. | 5080 | 5300 | 5520 | 5730 | 5840(F) | 6095 | 6350 | 6610(G) | 6790 | 6970 | 7160(H) |
| | SINGLE | kg. | 2380 | 2500 | 2630 | 2740 | 2900(F) ¹⁴⁵ | 3020 | 3140 | 3250(G) ¹⁴⁹ | 3350 | 3450 | 3550(H) ¹⁵² |
| | | lb. | 5240 | 5520 | 5790 | 6040 | 6395(F) | 6650 | 6910 | 7160(G) | 7380 | 7600 | 7830(H) |
| 12.00R20 | DUAL | kg. | 2470 | 2580 | 2680 | 2790 | 2880 | 3000(G) ¹⁴⁶ | 3080 | 3160 | 3250(H) ¹⁴⁹ | 3350 | 3450(J) ¹⁵¹ |
| | | lb. | 5440 | 5680 | 5910 | 6140 | 6360 | 6610(G) | 6790 | 6970 | 7160(H) | 7390 | 7610(J) |
| | SINGLE | kg. | 2550 | 2690 | 2810 | 2940 | 3060 | 3250(G) ¹⁴⁹ | 3350 | 3450 | 3550(H) ¹⁵² | 3650 | 3750(J) ¹⁵⁴ |
| | | lb. | 5620 | 5920 | 6200 | 6480 | 6740 | 7160(G) | 7380 | 7600 | 7830(H) | 8050 | 8270(J) |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum.

International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Commercial Light Truck Tires

Light Truck **METRIC** Radial Ply Tires for Trucks, Buses, Trailers & Multipurpose Passenger Vehicles Used in Normal Highway Service

TIRES MOUNTED ON 5° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (lb.) at various Cold Inflation Pressures | | | | | | | | | | |
|-----------------------|--------|--|------|------|------|-------------------------------|------|------|-------------------------------|------|------|-------------------------------|
| | | kPa | 250 | 275 | 300 | 350 | 380 | 400 | 450 | 480 | 500 | 550 |
| | | psi | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 |
| LT285/60R20 | DUAL | kg. | 865 | 916 | 975 | 1060 | 1145 | 1190 | 1285 | 1356 | 1390 | 1500(E) ₁₂₂ |
| | | lb. | 1840 | 2020 | 2195 | 2335 | 2525 | 2685 | 2835 | 2990 | 3135 | 3305(E) |
| | SINGLE | kg. | 950 | 1007 | 1070 | 1180 | 1259 | 1310 | 1400 | 1490 | 1530 | 1650(E) ₁₂₅ |
| | | lb. | 2020 | 2220 | 2410 | 2600 | 2775 | 2950 | 3085 | 3285 | 3445 | 3640(E) |
| LT275/65R18 | DUAL | kg. | 820 | 880 | 930 | 1060(C) ₁₁₀ | 1095 | 1140 | 1250(D) ₁₁₆ | 1300 | 1130 | 1400(E) ₁₂₀ |
| | | lb. | 1765 | 1940 | 2100 | 2335(C) ₁₁₀ | 2420 | 2570 | 2755(D) ₁₁₆ | 2865 | 3010 | 3085(E) ₁₂₀ |
| | SINGLE | kg. | 900 | 965 | 1020 | 1150(C) ₁₁₃ | 1205 | 1250 | 1360(D) ₁₁₉ | 1425 | 1450 | 1550(E) ₁₂₃ |
| | | lb. | 1940 | 2130 | 2310 | 2535(C) ₁₁₃ | 2660 | 2825 | 3000(D) ₁₁₉ | 3150 | 3305 | 3415(E) ₁₂₃ |
| LT245/70R17 | DUAL | kg. | 715 | 765 | 810 | 900(C) ₁₀₄ | 955 | 990 | 1060(D) ₁₁₀ | 1130 | 1160 | 1250(E) ₁₁₆ |
| | | lb. | 1540 | 1690 | 1830 | 1985(C) ₁₀₄ | 2105 | 2240 | 2335(D) ₁₁₀ | 2495 | 2615 | 2755(E) ₁₁₆ |
| | SINGLE | kg. | 785 | 840 | 890 | 1000(C) ₁₀₈ | 1050 | 1090 | 1180(D) ₁₁₄ | 1240 | 1270 | 1360(E) ₁₁₉ |
| | | lb. | 1690 | 1855 | 2010 | 2205(C) ₁₀₈ | 2315 | 2460 | 2600(D) ₁₁₄ | 2740 | 2875 | 3000(E) ₁₁₉ |
| LT265/70R17 | DUAL | kg. | 800 | 855 | 910 | 1030(C) ₁₀₉ | 1070 | 1110 | 1060(D) ₁₁₀ | 1240 | 1260 | 1320(E) ₁₁₈ |
| | | lb. | 1720 | 1890 | 2050 | 2270(C) ₁₀₉ | 2360 | 2510 | 2680(D) ₁₁₀ | 2735 | 2820 | 2910(E) ₁₁₈ |
| | SINGLE | kg. | 880 | 920 | 1000 | 1120(C) ₁₁₂ | 1175 | 1220 | 1215(D) ₁₁₄ | 1360 | 1390 | 1450(E) ₁₂₁ |
| | | lb. | 1890 | 2075 | 2255 | 2470(C) ₁₁₂ | 2595 | 2760 | 2910(D) ₁₁₄ | 3005 | 3100 | 3195(E) ₁₂₁ |
| LT265/70R18 | DUAL | kg. | 830 | 889 | 945 | 1060 | 1111 | 1160 | 1285 | 1315 | 1350 | 1450(E) ₁₂₁ |
| | | lb. | 1785 | 1960 | 2130 | 2335 | 2450 | 2605 | 2835 | 2900 | 3045 | 3195(E) ₁₂₁ |
| | SINGLE | kg. | 910 | 977 | 1040 | 1150 | 1220 | 1270 | 1400 | 1444 | 1480 | 1600(E) ₁₂₄ |
| | | lb. | 1960 | 2155 | 2340 | 2535 | 2690 | 2860 | 3085 | 3185 | 3345 | 3525(E) ₁₂₄ |
| LT275/70R18 | DUAL | kg. | 875 | 935 | 990 | 1120(C) ₁₁₂ | 1175 | 1220 | 1320(D) ₁₁₈ | 1390 | 1420 | 1500(E) ₁₂₂ |
| | | lb. | 1885 | 2065 | 2250 | 2470(C) ₁₁₂ | 2585 | 2750 | 2910(D) ₁₁₈ | 3060 | 3210 | 3305(E) ₁₂₂ |
| | SINGLE | kg. | 960 | 1030 | 1090 | 1215(C) ₁₁₅ | 1290 | 1340 | 1450(D) ₁₂₁ | 1525 | 1560 | 1650(E) ₁₂₅ |
| | | lb. | 2070 | 2270 | 2470 | 2680(C) ₁₁₅ | 2840 | 3020 | 3195(D) ₁₂₁ | 3360 | 3530 | 3640(E) ₁₂₅ |
| LT215/75R15 | DUAL | kg. | 570 | 608 | 645 | 730(C) ₉₇ | 762 | 790 | 875(D) ₁₀₃ | | | |
| | | lb. | 1255 | 1340 | 1460 | 1610(C) ₉₇ | 1680 | 1785 | 1930(D) ₁₀₃ | | | |
| | SINGLE | kg. | 625 | 669 | 710 | 800(C) ₁₀₀ | 837 | 870 | 950(D) ₁₀₆ | | | |
| | | lb. | 1345 | 1475 | 1605 | 1765(C) ₁₀₀ | 1845 | 1960 | 2095(D) ₁₀₆ | | | |
| LT235/75R15 | DUAL | kg. | 645 | 694 | 735 | 825(C) ₁₀₁ | 866 | 900 | 975(D) ₁₀₇ | 1027 | 1060 | 1150(E) ₁₁₃ |
| | | lb. | 1390 | 1530 | 1660 | 1820(C) ₁₀₁ | 1910 | 2035 | 2150(D) ₁₀₇ | 2265 | 2375 | 2535(E) ₁₁₃ |
| | SINGLE | kg. | 710 | 762 | 810 | 900(C) ₁₀₄ | 952 | 990 | 1060(D) ₁₁₀ | 1129 | 1160 | 1250(E) ₁₁₆ |
| | | lb. | 1530 | 1680 | 1825 | 1985(C) ₁₀₄ | 2100 | 2235 | 2335(D) ₁₁₀ | 2490 | 2610 | 2755(E) ₁₁₆ |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum. International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Commercial Light Truck Tires

Light Truck **METRIC** Radial Ply Tires for Trucks, Buses, Trailers & Multipurpose Passenger Vehicles Used in Normal Highway Service

TIRES MOUNTED ON 5° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (lb.) at various Cold Inflation Pressures | | | | | | | | | | |
|-----------------------|--------|--|------|------|------|-------------------------------|------|------|-------------------------------|------|------|-------------------------------|
| | | kPa | 250 | 275 | 300 | 350 | 380 | 400 | 450 | 480 | 500 | 550 |
| | | psi | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 |
| LT225/75R16 | DUAL | kg. | 635 | 675 | 725 | 800(C) ¹⁰⁰ | 945 | 885 | 975(D) ¹⁰⁷ | 1000 | 1040 | 1120(E) ¹¹² |
| | | lb. | 1365 | 1500 | 1630 | 1765(C) ¹⁰⁰ | 1875 | 1995 | 2150(D) ¹⁰⁷ | 2220 | 2330 | 2470(E) ¹¹² |
| | SINGLE | kg. | 700 | 745 | 795 | 880(C) ¹⁰³ | 930 | 970 | 1060(D) ¹¹⁰ | 1100 | 1140 | 1215(E) ¹¹⁵ |
| | | lb. | 1500 | 1650 | 1790 | 1940(C) ¹⁰³ | 2060 | 2190 | 2335(D) ¹¹⁰ | 2440 | 2560 | 2680(E) ¹¹⁵ |
| LT245/75R16 | DUAL | kg. | 720 | 770 | 820 | 910(C) ¹⁰⁴ | 960 | 1000 | 1080(D) ¹¹¹ | 1135 | 1170 | 1260(E) ¹¹⁶ |
| | | lb. | 1545 | 1700 | 1845 | 2006(C) ¹⁰⁴ | 2125 | 2255 | 2381(D) ¹¹¹ | 2515 | 2640 | 2778(E) ¹¹⁶ |
| | SINGLE | kg. | 790 | 850 | 900 | 1000(C) ¹⁰⁸ | 1055 | 1100 | 1190(D) ¹¹⁴ | 1250 | 1290 | 1380(E) ¹²⁰ |
| | | lb. | 1700 | 1870 | 2030 | 2205(C) ¹⁰⁸ | 2335 | 2480 | 2623(D) ¹¹⁴ | 2765 | 2900 | 3042(E) ¹²⁰ |
| LT265/75R16 | DUAL | kg. | 810 | 860 | 920 | 1030(C) ¹⁰⁹ | 1080 | 1130 | 1250(D) ¹¹⁶ | 1275 | 1310 | 1400(E) ¹²⁰ |
| | | lb. | 1740 | 1910 | 2075 | 2270(C) ¹⁰⁹ | 2390 | 2540 | 2755(D) ¹¹⁶ | 2825 | 2965 | 3085(E) ¹²⁰ |
| | SINGLE | kg. | 890 | 950 | 1010 | 1120(C) ¹¹² | 1185 | 1240 | 1360(D) ¹¹⁹ | 1400 | 1440 | 1550(E) ¹²³ |
| | | lb. | 1910 | 2100 | 2280 | 2470(C) ¹¹² | 2625 | 2790 | 3000(D) ¹¹⁹ | 3105 | 3260 | 3415(E) ¹²³ |
| LT225/75R17 | DUAL | kg. | 665 | 710 | 750 | 850(C) ¹⁰² | 885 | 920 | 1000(D) ¹⁰⁸ | 1050 | 1070 | 1150(E) ¹¹³ |
| | | lb. | 1425 | 1565 | 1695 | 1875(C) ¹⁰² | 1950 | 2075 | 2205(D) ¹⁰⁸ | 2310 | 2430 | 2535(E) ¹¹³ |
| | SINGLE | kg. | 730 | 780 | 825 | 925(C) ¹⁰⁵ | 970 | 1010 | 1090(D) ¹¹¹ | 1155 | 1180 | 1250(E) ¹¹⁶ |
| | | lb. | 1565 | 1720 | 1865 | 2040(C) ¹⁰⁵ | 2145 | 2280 | 2405(D) ¹¹¹ | 2540 | 2670 | 2755(E) ¹¹⁶ |
| LT215/80R15 | DUAL | kg. | 590 | 645 | 675 | 750 | 810 | 825 | 875(D) ¹⁰³ | | | |
| | | lb. | 1275 | 1395 | 1515 | 1655 | 1745 | 1855 | 1930(D) ¹⁰³ | | | |
| | SINGLE | kg. | 650 | 710 | 740 | 825 | 890 | 905 | 975(D) ¹⁰⁷ | | | |
| | | lb. | 1400 | 1535 | 1665 | 1820 | 1920 | 2040 | 2150(D) ¹⁰⁷ | | | |
| LT235/80R17 | DUAL | kg. | 730 | 800 | 830 | 925 | 1015 | 1010 | 1120 | 1090 | 1180 | 1285(E) ¹¹⁷ |
| | | lb. | 1570 | 1725 | 1870 | 2040 | 2190 | 2315 | 2470 | 2560 | 2685 | 2835(E) ¹¹⁷ |
| | SINGLE | kg. | 800 | 880 | 910 | 1030 | 1075 | 1140 | 1215 | 1272 | 1333 | 1400(E) ¹²⁰ |
| | | lb. | 1725 | 1895 | 2055 | 2270 | 2370 | 2515 | 2680 | 2805 | 2940 | 3085(E) ¹²⁰ |
| LT215/85R16 | DUAL | kg. | 630 | 690 | 720 | 800(C) ¹⁰⁰ | 865 | 870 | 975(D) ¹⁰⁷ | 1025 | 1030 | 1120(E) ¹¹² |
| | | lb. | 1360 | 1490 | 1625 | 1765(C) ¹⁰⁰ | 1865 | 1985 | 2150(D) ¹⁰⁷ | 2210 | 2320 | 2470(E) ¹¹² |
| | SINGLE | kg. | 695 | 760 | 790 | 880(C) ¹⁰³ | 950 | 965 | 1060(D) ¹¹⁰ | 1130 | 1130 | 1215(E) ¹¹⁵ |
| | | lb. | 1495 | 1640 | 1785 | 1940(C) ¹⁰³ | 2050 | 2180 | 2335(D) ¹¹⁰ | 2430 | 2550 | 2680(E) ¹¹⁵ |
| LT235/85R16 | DUAL | kg. | 720 | 790 | 820 | 910(C) ¹⁰⁴ | 985 | 1000 | 1080(D) ¹¹¹ | 1165 | 1170 | 1260(E) ¹¹⁶ |
| | | lb. | 1545 | 1700 | 1845 | 2006(C) ¹⁰⁴ | 2125 | 2260 | 2381(D) ¹¹¹ | 2515 | 2645 | 2778(E) ¹¹⁶ |
| | SINGLE | kg. | 790 | 965 | 900 | 1000(C) ¹⁰⁸ | 1100 | 1155 | 1190(D) ¹¹⁴ | 1285 | 1290 | 1380(E) ¹²⁰ |
| | | lb. | 1700 | 1870 | 2030 | 2205(C) ¹⁰⁸ | 2335 | 2485 | 2623(D) ¹¹⁴ | 2765 | 2905 | 3042(E) ¹²⁰ |
| LT255/85R16 | DUAL | kg. | 815 | 890 | 930 | 1030(C) ¹⁰⁹ | 1115 | 1130 | 1250(D) ¹¹⁶ | 1320 | 1320 | 1400(E) ¹²⁰ |
| | | lb. | 1745 | 1920 | 2085 | 2270(C) ¹⁰⁹ | 2400 | 2550 | 2755(D) ¹¹⁶ | 2840 | 2980 | 3085(E) ¹²⁰ |
| | SINGLE | kg. | 895 | 980 | 1020 | 1120(C) ¹¹² | 1225 | 1240 | 1360(D) ¹¹⁹ | 1450 | 1450 | 1550(E) ¹²³ |
| | | lb. | 1920 | 2110 | 2290 | 2470(C) ¹¹² | 2635 | 2800 | 3000(D) ¹¹⁹ | 3120 | 3275 | 3415(E) ¹²³ |

| | | kPa | 250 | 275 | 300 | 325 | 350 | 375 | 400 | 425 | 450 | 475 | 500 | 525 | 550 | 575 |
|------------|--------|-----|------|------|------|------|------|-------------------------------|------|------|------|-------------------------------|------|------|------|-------------------------------|
| | | psi | 35 | 40 | 45 | 47 | 50 | 54 | 60 | 62 | 65 | 69 | 75 | 76 | 80 | 83 |
| 205/65R15C | DUAL | kg. | 578 | 624 | 669 | 713 | 757 | 800(C) ¹⁰⁰ | | | | | | | | |
| | | lb. | 1275 | 1376 | 1475 | 1573 | 1669 | 1764(C) ¹⁰⁰ | | | | | | | | |
| | SINGLE | kg. | 615 | 663 | 711 | 758 | 804 | 850(C) ¹⁰² | | | | | | | | |
| | | lb. | 1355 | 1462 | 1568 | 1671 | 1773 | 1874(C) ¹⁰² | | | | | | | | |
| 195/75R16C | DUAL | kg. | 554 | 597 | 640 | 683 | 725 | 766 | 806 | 846 | 886 | 925(D) ¹⁰⁵ | | | | |
| | | lb. | 1220 | 1317 | 1412 | 1505 | 1597 | 1688 | 1777 | 1866 | 1953 | 2039(D) ¹⁰⁵ | | | | |
| | SINGLE | kg. | 583 | 630 | 675 | 720 | 764 | 807 | 850 | 892 | 934 | 975(D) ¹⁰⁷ | | | | |
| | | lb. | 1286 | 1388 | 1488 | 1587 | 1684 | 1779 | 1873 | 1966 | 2058 | 2149(D) ¹⁰⁷ | | | | |
| 235/65R16C | DUAL | kg. | 698 | 745 | 808 | 862 | 914 | 966 | 1017 | 1068 | 1118 | 1167 | 1216 | 1265 | 1312 | 1360(E) ¹¹⁹ |
| | | lb. | 1540 | 1662 | 1782 | 1899 | 2016 | 2130 | 2243 | 2354 | 2464 | 2573 | 2681 | 2788 | 2893 | 2998(E) ¹¹⁹ |
| | | kg. | 745 | 804 | 862 | 919 | 975 | 1030 | 1085 | 1139 | 1192 | 1244 | 1297 | 1348 | 1399 | 1450(E) ¹²¹ |
| | | lb. | 1642 | 1772 | 1900 | 2025 | 2149 | 2271 | 2391 | 2510 | 2627 | 2744 | 2858 | 2972 | 3085 | 3197(E) ¹²¹ |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum.

International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Commercial Light Truck Tires

Light Truck **RADIAL & BIAS Ply** Tires for Trucks, Buses, Trailers & Multipurpose Passenger Vehicles Used in Normal Highway Service

TIRES MOUNTED ON 5° DROP CENTER RIMS

| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures | | | | | | | | | | |
|------------------------|--------|--|------|------|------|----------------------------|------|------|-----------------------------|------|------|------------------------------|
| | | RADIAL PLY | | | | | | | | | | |
| | | kPa | 250 | 280 | 310 | 340 | 380 | 410 | 450 | 480 | 520 | 550 |
| | | psi | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 |
| | | DIAGONAL (BIAS) PLY | | | | | | | | | | |
| kPa | 210 | 240 | 280 | 310 | 340 | 380 | 410 | 450 | 480 | 520 | | |
| psi | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | | |
| 7.00R15LT 7.00*15LT | DUAL | kg. | 540 | 595 | 645 | 690(C)₉₅ | 735 | 780 | 825(D)₁₀₁ | 850 | 890 | 925(E)₁₀₅ |
| | | lb. | 1190 | 1310 | 1420 | 1520(C) | 1620 | 1715 | 1820(D) | 1870 | 1960 | 2040(E) |
| | SINGLE | kg. | 610 | 670 | 730 | 775(D)₉₉ | 830 | 880 | 925(D)₁₀₅ | 965 | 1005 | 1060(E)₁₁₀ |
| | | lb. | 1350 | 1480 | 1610 | 1710(C) | 1830 | 1940 | 2040(D) | 2130 | 2220 | 2335(E) |

| | | RADIAL PLY | | | | | | | | | | | | | |
|----------------------------|--------|---------------------|------|------|------|------------------------------|------|------|------------------------------|------|------|------------------------------|------|------|------------------------------|
| | | kPa | 250 | 280 | 310 | 350 | 380 | 410 | 450 | 480 | 520 | 550 | 590 | 620 | 660 |
| | | psi | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 |
| | | DIAGONAL (BIAS) PLY | | | | | | | | | | | | | |
| | | kPa | 210 | 250 | 280 | 310 | 350 | 380 | 410 | 450 | 480 | 520 | 550 | 590 | 620 |
| psi | 30 | 240 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | 75 | 80 | 85 | 90 | | |
| 8.00R16.5LT 8.00*16.5LT | DUAL | kg. | 540 | 595 | 640 | 690(C)₉₅ | 735 | 775 | 825(D)₁₀₁ | 855 | 895 | 925(E)₁₀₅ | 965 | 1000 | 1030(F)₁₀₉ |
| | | lb. | 1195 | 1310 | 1415 | 1520(C) | 1620 | 1710 | 1820(D) | 1885 | 1970 | 2040(E) | 2130 | 2200 | 2270(F) |
| | SINGLE | kg. | 615 | 675 | 730 | 800(C)₁₀₀ | 835 | 880 | 925(D)₁₀₅ | 975 | 1020 | 1060(E)₁₁₀ | 1100 | 1130 | 1180(F)₁₁₄ |
| | | lb. | 1360 | 1490 | 1610 | 1765(C) | 1840 | 1945 | 2040(D) | 2145 | 2240 | 2335(E) | 2420 | 2500 | 2600(F) |
| 8.75R16.5LT 8.75*16.5LT | DUAL | kg. | 625 | 685 | 740 | 800(C)₁₀₀ | 840 | 895 | 950(D)₁₀₅ | 985 | 1030 | 1090(E)₁₁₁ | 1110 | 1150 | 1215(F)₁₁₅ |
| | | lb. | 1380 | 1515 | 1630 | 1765(C) | 1855 | 1970 | 2095(D) | 2175 | 2260 | 2405(E) | 2450 | 2540 | 2680(F) |
| | SINGLE | kg. | 710 | 780 | 840 | 900(C)₁₀₄ | 955 | 1020 | 1090(D)₁₁₁ | 1120 | 1170 | 1215(E)₁₁₅ | 1260 | 1310 | 1360(F)₁₁₉ |
| | | lb. | 1570 | 1720 | 1850 | 1985(C) | 2110 | 2240 | 2405(D) | 2470 | 2570 | 2680(E) | 2780 | 2880 | 3000(F) |
| 9.50R16.5LT 9.50*16.5LT | DUAL | kg. | 740 | 810 | 875 | 950(C)₁₀₆ | 1000 | 1060 | 1120(D)₁₁₂ | 1170 | 1220 | 1285(E)₁₁₇ | | | |
| | | lb. | 1635 | 1785 | 1925 | 2095(C) | 2200 | 2330 | 2470(D) | 2570 | 2685 | 2835(E) | | | |
| | SINGLE | kg. | 845 | 920 | 995 | 1090(C)₁₁₁ | 1130 | 1200 | 1285(D)₁₁₇ | 1320 | 1380 | 1450(E)₁₂₁ | | | |
| | | lb. | 1860 | 2030 | 2190 | 2405(C) | 2500 | 2650 | 2835(D) | 2920 | 3050 | 3195(E) | | | |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum. International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Commercial Light Truck Tires

Light Truck Radial Ply Tires for Trucks, Buses & Trailers Used in Normal Highway Service

| TIRES MOUNTED ON 5° DROP CENTER RIMS | | | | | | | | | | | |
|--------------------------------------|--------|--|------|-------------------------------|------|------|-------------------------------|------|------|-------------------------------|-------------------------------|
| TIRE SIZE DESIGNATION | USAGE | Tire Load Limits (kg./lb.) at various Cold Inflation Pressures | | | | | | | | | |
| | | kPa | 410 | 450 | 480 | 520 | 550 | 590 | 620 | 660 | 690 |
| | | psi | 60 | 65 | 70 | 75 | 80 | 85 | 90 | 95 | 100 |
| 7.50R16LT | DUAL | kg. | 925 | 975(D) ₁₀₇ | 1020 | 1065 | 1120(E) ₁₁₂ | 1150 | 1190 | 1250(F) ₁₁₆ | 1450(G) ₁₂₁ |
| | | lb. | 2040 | 2150(D) | 2245 | 2345 | 2470(E) | 2540 | 2630 | 2755(F) | 3195(G) |
| | SINGLE | kg. | 1050 | 1120(D) ₁₁₂ | 1160 | 1210 | 1250(E) ₁₁₆ | 1310 | 1360 | 1400(F) ₁₂₀ | 1510(G) ₁₂₂ |
| | | lb. | 2310 | 2470(D) | 2560 | 2670 | 2755(E) | 2885 | 2900 | 3085(F) | 3330(G) |

NOTES: Letters in parentheses denote Load Range for which boldface loads and inflations are maximum.

International Load Index numbers are shown after Load Range.

IMPORTANT — Always use approved tire and rim combinations for diameter and contours.

Technical Bulletins

Title

Reference Number • Date

Truck/Bus Tire Tread Rubber Worn Color Appearance 74

T-16-10 • June 2016

11-Digit DOT Number 75

TB-2000-01 • January 2000

TBR Sidewall Repair & Identification 76

T9106TD • April 1996

Extra-Deep-Tread Tires' Lateral Stiffness Effects 77

T9502TI • October 1995

Bridgestone Firestone Chassis Dynamometer

Test Guides for Truck/Bus Tires 78

T9501X • October 1995

Aftermarket Tire Products

& Additives in Truck/Bus Tires 79

TB-2008-001 • January 2008

Aerosol Tire Sealer/Inflators 80, 81

G-008-X • October 1991

Innertube Storage 82

G-004-X • June 1991

Mismatching Tire Bead & Rim Diameters 83 - 85

T9106PD • August 1991

Mounting Tubeless Truck Tires 86

T9101TD • December 1990


Steam Cleaning Tires 87

T8701GD • October 1987

Truck/Bus Tire Tread Rubber Worn Color Appearance

The tread rubbers of Bridgestone, Firestone, and Dayton brand truck/bus tires incorporate various technologies to optimize traction, wear, and other tire performance criteria.

For those tires engineered with dual tread compounds, once the outer tread rubber (commonly referred to as cap compound) has worn away, the base tread rubber will become exposed and may be apparent (see examples below). Depending on the design, the base rubber may have a lighter or darker appearance than the outer tread rubber. This color difference is a cosmetic condition as long as the tire is not damaged, has adequate tread depth, and there is no condition that requires further evaluation with a tire service professional or would make it necessary to remove it from service.

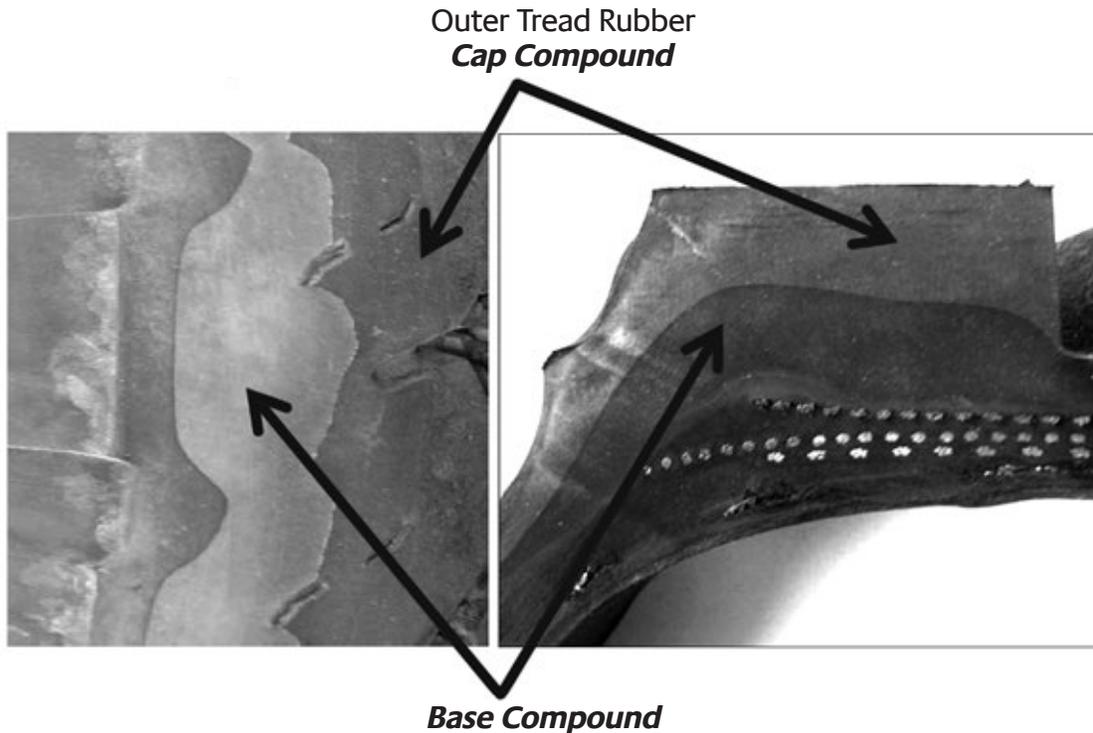

11 Digit DOT Number

The National Highway Traffic Safety Administration (NHTSA) has approved a change to the regulation that requires the date of manufacture in the tire identification number to change from 3 digits to 4 digits (2 digits for week + 2 digits for year.)

Bridgestone Firestone tire will start to adopt the new regulation for tires produced starting the first DOT week of 2000. Full integration of the 11 digit DOT serial number will be completed during the 2nd quarter of 2000.

Tire dealers will need to list the new 11-digit DOT serial number on Tire Registration Cards and Warranty Claim Forms (both forms have space for 11-digits.)

The new DOT Serial Number format:

| | | | |
|------------|-----------|-------------|-------------|
| 4D | HL | ABC | 0508 |
| Plant Code | Size Code | Option Code | Date Mfg. |

Ex: 5th week of 2008

TBR Sidewall Repair & Identification

Background


Radial truck tires can successfully be repaired in the sidewall area. When damaged body cord is removed and a reinforcing unit is used in the repair process, a radial sidewall bulge may be visible. In 1984, the Rubber Manufacturers Association (RMA) issued a bulletin stating that bulges up to $\frac{3}{8}$ " in height are permitted when associated with these repairs.

Issue

The Commercial Vehicle Safety Alliance (CVSA) is responsible for inspecting commercial vehicles for safety defects and placing vehicles out of service if defects such as tire separations or exposed cord/fabric are found. The inspectors, in the past have had difficulty distinguishing between sidewall bulges due to repairs (allowed) and tire separations.

Action


In October 1990, the CVSA agreed to accept the use of a blue triangular identification adjacent to a sidewall repair bulge. A vehicle will not be placed out of service if a tire repair bulge is $\frac{3}{8}$ " or less in height and is identified with an adjacent blue triangle. The retread and repair industry will be incorporating these identification patches into their sidewall repair procedures.

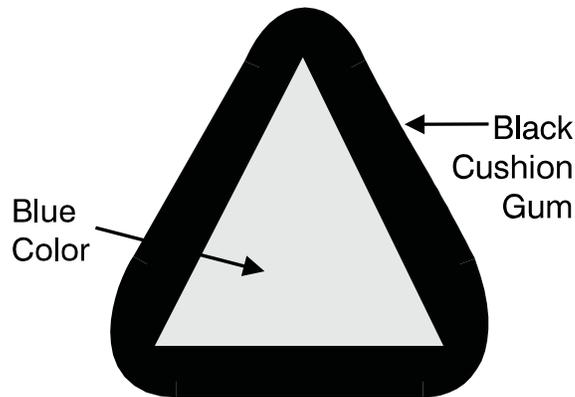

Sample Triangular Identification Patch

Note: Actual Size

Extra-Deep-Tread Tires' Lateral Stiffness Effects

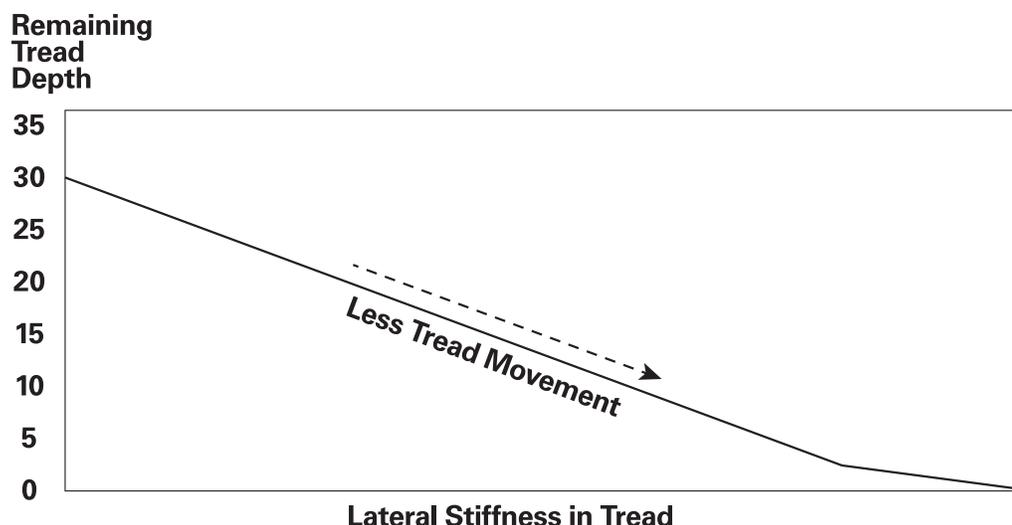

Many drivers are aware of the feel of the trucks used on a daily basis in fleets, and are sometimes sensitive to the ride dynamics of fitment changes of new tire designs on the vehicle.

One of the sensations drivers notice is a side-to-side motion. This motion is the byproduct of what is commonly referred to as lateral stiffness.

The lateral stiffness of a tire is due in large part to inflation pressure, as well as the tire's tread depth. Both of these factors vary over time. Reduced inflation pressure and deeper tread depth results in lower lateral stiffness.

Therefore, some users may comment on experiencing a slight swaying with newly installed extra-deep-tread drive tires, especially under full load or after replacing worn drive tires.

The sensation the driver feels is the lateral stiffness effect of the extra-deep-tread drive tire compared to the worn tire being replaced and does not affect traction or warrant any concerns.

The lateral stiffness improves quickly as the tread wears and a driver will become accustomed to the initial difference in sensation.

Bridgestone Firestone Chassis Dynamometer Test Guidelines for Truck/Bus Tires

I. Background

Vehicle manufacturers and many maintenance facilities conduct in-place vehicle testing on twin-roll chassis dynamometers. Testing is usually conducted over a short period of time on empty vehicles. If the following procedure is not adhered to, irreversible damage may occur to the tire.

II. Procedure

To prevent excessive head buildup in the center of the tire tread, follow the recommended time period based on roller diameter as listed below:

| Maximum Allowable Time by Roller Diameter | |
|---|------------|
| 8-5/8" Roller | 18" Roller |
| 3.5 minutes | 6 minutes |

Maximum Allowable Speed is 55 mph.

Load: These time restrictions apply regardless of the actual load and are, in fact, more critical when the vehicle is tested without a load.

III. Precautions

To avoid the possibility of irreversible tire damage and/or failure during testing, it is important that the following precautions be taken:

- Do not exceed the time and speed restrictions listed in part II.
- Allow at least one hour cool down between tests.
- When it is anticipated that a test will exceed the time/test value established, a worn or "slave" tire should be used in place of the new tire for testing purposes.

Questions regarding test procedures, loads, etc. should be directed to your Regional Field Engineering Office.



Example of Dyno Damage

Aftermarket Tire Products & Additives in Truck/Bus Tires

Bridgestone Firestone does not endorse or prohibit the use of aftermarket tire products. The use of internally applied additives for balance, sealing, cooling, or any other alleged tire performance enhancement in Bridgestone or Firestone brand truck/bus tires will not void the Limited Warranty unless an inspection of the tires reveals damage related to the use of the additive.

Aerosol Tire Sealer/Inflators

Aerosol tire sealer/inflators have been used by large numbers of motorists each year and an undetermined number of tires now on the road, which have been filled with these devices, may have combustible gases in their air chambers.

Please read carefully and make sure all your employees read the attached publications that have been approved and distributed by the Rubber Manufacturers Association and the National Highway Safety Administration.

TIRE OR RIM REPAIR SAFETY BULLETIN

FACTS YOU SHOULD KNOW...



It is difficult to determine whether a tire has been inflated with a flammable aerosol type tire sealer/inflator. Therefore, if your establishment repairs or works on rims or on pressurized, rim-mounted tires, you should handle all of them as if they contain a flammable tire sealer-inflator.

The gases in the sealer/inflator, which can be poisonous, are combustible inside the tire. An explosion can occur if ANY ignition source is present. Even the insertion of a plug into a steel-belted tire could cause an explosion!



Proper safety precautions to avoid ignition of flammable gases **MUST** be followed during the repair or maintenance of ALL tires or rims.

Failure to follow these precautions and procedures may result in serious or even fatal injury.

PRECAUTIONS YOU SHOULD TAKE...



All tires should be handled as if a flammable tire sealer has been used. Do not rely upon the customer, even if he advises you that one has not been used. Customers may neglect to tell you or even may have forgotten they used a sealer/inflator.



Always make sure that the repair area is well-ventilated so that any gases that are present will not accumulate.



Never weld or use a cutting torch on a wheel or rim without first completely removing the tire from the rim. Otherwise, explosions resulting in possible serious or fatal injury can occur, even in the absence of flammable sealer/inflator.



Do not use a tire rasp, plug or any object which could cause sparks on a tire or rim without first completely removing the tire from the rim. These ignition sources could lead to an explosion.



Do not permit smoking or any flame, spark or other ignition source in the area where tires or rims are being kept.



Never add air to a tire treated with a flammable sealer/inflator without completely removing the flammable gas. Air added to a tire containing flammable gas may make it more explosive.

BEFORE BEGINNING REPAIRS OR SERVICE ON ANY RIM OR TIRE, YOU SHOULD ALWAYS FOLLOW THESE SAFETY PROCEDURES:

Remove the valve stem completely to release the tire pressure in a well-ventilated area, away from sparks or other ignition sources.

After the pressure has been released and before making any repairs, remove the tire from the wheel rim.



If you believe a sealer/inflator has been used, wash the inside of the tire with a detergent/water solution and rinse thoroughly. Allow the tire to dry before repairs are made.



U.S. Department of
Transportation

News:

Office of the Assistant Secretary for Public Affairs
Washington, D.C. 20590

FOR IMMEDIATE RELEASE
Tuesday, September 24, 1991

CONSUMER ADVISORY

NHTSA 49-91
Contact: Skipp Calvert
Barry McCahill
Tel. No.: (202) 366-9550

NHTSA WARNS ABOUT HAZARDS OF FIXING TIRES FILLED WITH AEROSOL INFLATORS

The National Highway Traffic Safety Administration (NHTSA) today cautioned motorists and urged workers at service stations and auto and tire repair shops to be careful while fixing tires that have been filled with aerosol inflators.

According to NHTSA Administrator Jerry Ralph Curry, many of the aerosol inflators contain a flammable propellant that can cause an explosion under certain circumstances. "People in the tire repair business especially should be aware of the hazard and take precautions to reduce the risk of an explosion," he said.

Aerosol inflators, marketed under various brand names, are widely sold to the public for temporarily fixing tires that have gone flat because of slow leaks and small punctures, Curry said.

He said that despite flammability warnings on the cans and instructions for safe use, many consumers may be unaware of the potential danger. "Aerosol flat tire fixes should be considered as emergency, temporary repairs and used with caution. It is always preferable to have the tire repaired professionally or replaced.

"After filling a tire with an aerosol inflator, don't expose the tire to extreme heat, flames, sparks or other ignition sources. Be careful using metal tools like tire irons, metal reamers and hammers because they could cause sparks while being used to repair a tire," Curry said.

He noted that because aerosol inflators are used so commonly, consumers and service personnel should assume a tire may have been repaired previously with an aerosol product. "Before starting to fix a tire, remove the valve core and completely deflate the tire to eliminate as much of the aerosol propellant as possible. Then, inflate and deflate the tire a few times to completely remove all traces of the potentially explosive propellant. Once this is done, you may repair the tire without risk of explosion," Curry said.

####

Innertube Storage

Innertubes should always be stored in a sealed enclosure. If the seal is damaged or broken, reseal the enclosure or repackage the affected tubes to prevent premature ozone crack damage on tubes. Exposure to weather, open doors, sunlight, electric motors and fans can cause premature aging of the rubber compound, especially when folded. In addition, tubes stored in tires can be similarly affected if unprotected by a flap or rim.

**Tubes with ozone crack damage should be replaced.
Do not place these in service.**

Mismatching Tire Bead & Rim Diameters

There is danger in installing a tire of one rim diameter on a rim of a different rim diameter.

Always replace a tire on a rim with another tire of exactly the same rim diameter designation and suffix letter.

For example a 16" tire goes with a 16" rim. **Never mount a 16" size diameter tire on a 16.5" rim.** While it is possible to pass a 16" diameter tire over the lip or flange of a 16.5" size rim diameter, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflation, the tire bead will break with explosive force and could cause serious injury or death.

Various materials have been published on the importance of properly matching tire bead and rim diameters prior to attempting to mount the assembly. Listed below is a sampling of that material.

Bridgestone:

1. Technical Bulletin #T9104TD

Sec. V Tire and Rim Matching Importance

Remember the importance of proper matching of tires and rims. In particular, special care must also be used in the mounting of any 16" diameter tire sizes, as well as the 15.5" and 17.5" sizes. The 16" size tire must be mounted only

on the approved 16" rims and not the 15.5" or 16.5" rims. In addition, any 15" size tire must be mounted only on approved 15" rims not on the 15.5" rim and any 17" size tire must be mounted only on approved 17" rims not on the 17.5" rim.

If mounting of a 15" diameter tire is attempted on a 15.5" rim, or a 16" tire is attempted to be mounted on a 16.5" rim, or a 17" tire is attempted to be mounted on a 17.5" rim, serious injury or death may result.

2. Tire Label Safety Warning

Safety Warning

- Serious injury or death may result from an explosion of tire/rim assembly due to the use of excessive pressure during mounting.
- Never exceed 40 psi (275 kpa) to seat beads. After beads are seated, adjust inflation to pressure recommended by vehicle manufacturer.
- During tire inflation, always have assembly secured, stand clear, and use remote controlled clip on air hose.
- Only specially trained persons should mount tires.
- Mount only on 16 inch* diameter rims.

**Warning: Varies by tire size.*

1/3 continues >>>

3. Molded Sidewall Safety Warning

Safety Warning: Serious Injury may result from:

- Tire failure due to inflation/overloading — follow owner's manual or tire placard in vehicle.
- Explosion of tire/rim assembly due to improper mounting — never exceed 40 psi (275 kpa) to seat beads — mount only 16 inch diameter rims* — only specially trained persons should mount tires.

*Warning: Varies by tire size.

Rubber Manufacturer Association (RMA)

1. Care and Service of Automobile and Light Truck Tires *

* Copies from the RMA material can be ordered from:

Rubber Manufacturers Association
1400 K Street N.W.
Washington, D.C. 20005


WARNING

There is danger in installing a tire of one rim diameter on a rim of a different diameter.

Always replace a tire on a rim with another tire of exactly the same rim diameter designation and suffix letter.

For example a 16" tire goes with a 16" rim. Never mount a 16" size diameter tire on a 16.5" rim. While it is possible to pass a 16" diameter tire over the lip or flange of a 16.5" size rim diameter, it cannot be inflated enough to position itself against the rim flange. If an attempt is made to seat the tire bead by inflation, the tire bead will break with explosive force and could cause serious injury or death.

Rims of a different diameter and tapers cannot be interchanged. The following diagram illustrates the difference between rims of two different tapers and diameters:

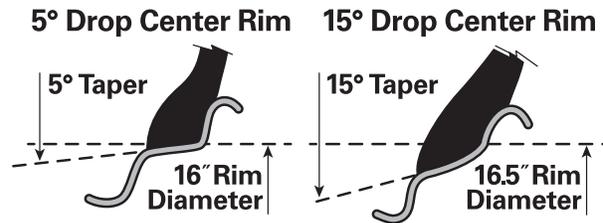

The following diagram shows how the beads of a 16" tire will not seat on a 16.5" rim. The beads cannot be forced out against the rim flanges by using more air pressure, because this will break the beads and the tire will explode.



Mismatching Tire Bead & Rim Diameters **2/3** continues >>>

WARNING

Never inflate beyond 40 pounds pressure to seat beads.

Never stand, lean or reach over the assembly during inflation.

Inspect both sides of the tire to be sure that the beads are evenly seated. If tire mounted on a machine that does not have a positive lock-down devices to hold the wheel, inflation should be done in a safety cage. If both beads are not properly seated when pressure reaches 40 pounds, completely deflate the assembly, reposition the tire and/or tube on the rim, relubricate and reinflate. Inflating beyond 40 pounds air pressure when trying to seat the bead is a DANGEROUS PRACTICE that may break a tire bead (or even the rim) with explosive force, possibly resulting in serious injury or death. After the beads are fully seated, pressure may be increased above 40 psi to operating pressures, not to exceed the maximum labeled on the tire sidewall.

WARNING

Serious Injury May Result From:

- **Tire failure due to underinflation/overloading – follow owner’s manual or tire placard in vehicle;**
- **Explosion of tire/rim assembly due to improper mounting – only specially trained persons should mount tires.**

WARNING

Tire changing can be dangerous and should be done by trained personnel using proper tools and procedures. Always read and understand any manufacturer’s warning contained in their customer’s literature or molded into the tire sidewall.

Failure to comply with these procedures may result in faulty positioning of the tire and/or rim parts, and cause the assembly to burst with explosive force, sufficient to cause serious physical injury or death. Never mount or use damaged tires or rims.

2. “Demounting and Mounting Procedures for Automobile Tires” (Wallchart)*

3. “Tire Replacement Guide for Light Trucks” (Wallchart)*

Consumer Inquires:

If questioned by a consumer on this matter, it is recommended that you stress the following areas:

1. Bridgestone tires are designed with adequate strength to withstand mounting and demounting stresses when correctly matched to rims of the correct diameter.
2. All Bridgestone 16” and 16.5” tires carry a safely warning permanently molded into the tire sidewall which directs trained personnel to mount only the approved matching rim (example: “Mount only on 16 inch diameter rims.”)*

**Warning: Varies by tire size.*

Mounting Tubeless Truck Tires

Proper mounting practices are mandatory to help ensure uniform tire/wheel assemblies for application to heavy duty trucks which use 22.5 and 24.5 bead diameter tubeless truck tires. Failure to follow the industry recommendations for mounting uniformity may result in improper tire bead/wheel fit and can lead to vehicle vibration and irregular tire wear.

Bridgestone recently conducted a tire mounting study involving tubeless tires of different brands, aspect ratios and bead diameters on new and used steel and aluminum wheels. Bridgestone tires included in this study were R299, R194-LP, R293 and R194 designs.

Results of the evaluation showed that regardless of the item combination checked, uniform assemblies were obtained when the following three practices were performed:

1. Clean the wheel or rim
2. Lubricate the tire and beads
AND WHEEL/RIM BEAD SEAT
3. Check the assembly for concentricity

1. A used wheel/rim should be cleaned by wire brushing to remove rust, scale and build-up. Painting the cleaned metal with primer or anti-rust paint is recommended.
2. Before assembling tire and wheel/rim, lubricate tire beads and wheel/rim seat with a vegetable oil-based lubricant formulated for tire and wheel/rim use. Do not use petroleum- or solvent-based products, as they cause rubber deterioration.



Failure to lubricate the wheel/rim as well as the tire can lead to a non-uniform assembly.

The best initial balance is obtained by matching the tire's light spot (marked by a yellow dot or circle) at the wheel/rim valve.

3. To check the assembly for concentricity of a tire and wheel/rim, measure the distance between the tire-flange interface and the circumferential ring molded into the

tire sidewall at four locations (90 degrees apart) around the tire-flange circumference. Distances measured should be within a 2/32" (1.5 mm) range for acceptable uniformity. If the ranges in distance within the same side of the tire are greater than this, break down assembly, re-lubricate and remount the tire.

Following these practices will reduce vehicle vibration and irregular wear occurrences. The first step in investigating these types of complaints should be the measurement of tire and wheel/rim concentricity to determine if non-uniform mounting is present, and the probable cause. If so, break down assembly, re-lubricate tire and wheel and remount tire.

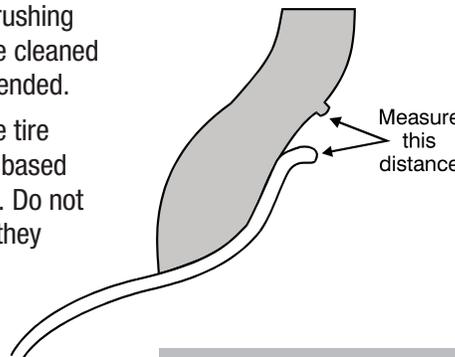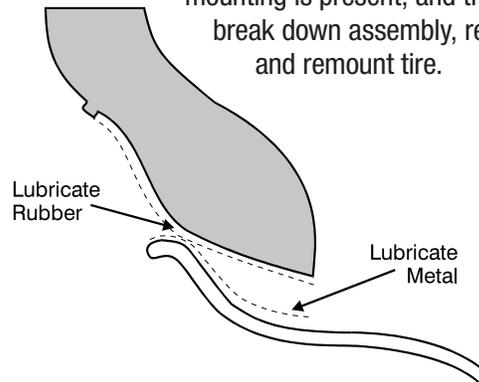

**REMEMBER:
CLEAN! LUBRICATE! CHECK!
AND ALWAYS FOLLOW ALL
OSHA, RMA, AND MANUFACTURER
MOUNTING SAFETY PRECAUTIONS!**

Steam Cleaning Tires

CAUTION: Steam cleaning can damage a tire and render it unserviceable.

At many businesses throughout the United States, it is common practice to use “steam cleaning equipment” to wash trucks and tires.

Nozzle temperature on steam cleaning equipment typically reaches 280°F.

When a steam cleaning nozzle is held too close to the sidewall of a tire for as short a time as 45 seconds, a small spongy blister may appear on the sidewall. When this blister is cut open, one will observe reverted rubber resulting from the excessive localized heat.

Steam cleaning of tires can be harmful to tires when the nozzle is concentrated in one spot for a period of time.

2016 MEDIUM TRUCK TIRE COMPARISON GUIDE



FS591 pg 6 *Fuel-Efficient Steer Radial*

Long & regional haul all-position steer featuring a proprietary shoulder design with the Equalizer Rib™ and Defense Groove™ designs to combat the initiation and spread of irregular wear.

EPA SmartWay® verified and CARB compliant.

Replaces:

- BFGoodrich **ST244**
- Hankook **AL11, AL07+**
- Yokohama **101ZL, RY617**




FS561 pg 7 *Steer Radial*

Excellent for steer position in pickup & delivery service and regional haul applications.

Enhanced features for long, even wear and casing durability. Innovative sidewall design to improve fuel efficiency, and protective ribs for curbing and impacts.

Replaces:

- BFGoodrich **ST230**
- Hankook **AH12**
- Yokohama **RY023, 108ZR**

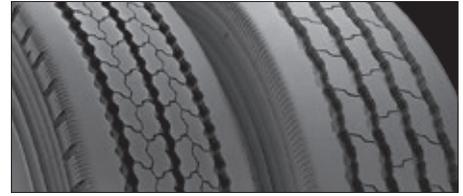

FS560 PLUS pg 9 *All-Position Radial with Low-Profile & Modified Versions*

All-position tire for use in urban, high-scrub service in pickup & delivery and regional haul applications.

Replaces:

- BFGoodrich **ST230**
- Hankook **AH12**
- Yokohama **RY023, 103ZR**



FD691 pg 10 *Fuel-Efficient Drive Radial*

Long & regional haul radial recommended for tandem- and single-drive axle applications. Special cap and sidewall compounds and construction improves life of tread.

EPA SmartWay® verified and CARB compliant.

Replaces:

- BFGoodrich **DR454**
- Hankook **DL11**
- Yokohama **709ZL**



FD690 PLUS pg 11 *Drive Radial*

Drive radial with solid shoulder and aggressive center lugs help to improve traction in wet or dry conditions for the life of the tread. Suitable for single- and tandem-axle drive radials.

Replaces:

- Hankook **DL12, DL07**
- Yokohama **703ZL, TY577**



FD663 pg 12 *Drive Radial*

Drive radial with open-shoulder design to help provide sure traction and grip in mud and snow. Recommended for high traction and high scrub drive-axle applications.

Replaces:

- Hankook **DH06, Z35A**
- Yokohama **SY767, TY303**



FT491 pg 13 *Fuel-Efficient Trailer Radial*

Radial suitable for all-position but recommended for single- and tandem-axle trailer. Features Equalizer Rib™ and Defense Groove™ designs that combat irregular wear.

EPA SmartWay® verified and CARB compliant.

Replaces:

- Hankook **TL01**
- Yokohama **RY587**



FS400 pg 14 *All-Position Radial*

Ideal for on-highway intercity bus service requiring very heavy load capacity, and ultra-quiet ride.

Replaces:

- Continental **HSL1 Coach**



FD600 pg 15 *Drive Radial*

Ideal for on-highway drive-axle intercity bus service. Features an open-shoulder lug pattern and tread design to help provide aggressive traction on wet and dry conditions.

Replaces:

- Continental **HDR2**

ON/OFF-HIGHWAY



FS820 pg 16
*On/Off-Highway
All-Position Radial*

Rugged five-rib design with tough cap/base compound helps resist cuts for extra durability. Stone rejecter platforms protect the belts and improve retreadability.

Replaces:

Hankook **AM06**
Yokohama **MY507, 501ZA**




T819 pg 17
*On/Off-Highway
All-Position Radial*

Rugged, four-rib on/off-highway all-position radial, featuring cut-resistant compounds for long tread life.

Replaces:

Hankook **AM06**
Yokohama **MY507, 501ZA**

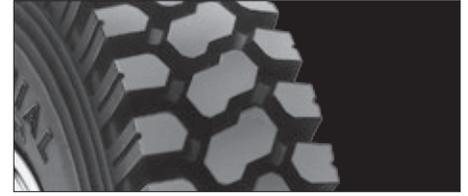

T831 pg 18
On/Off-Highway Drive Radial

An on/off-highway drive tire with a deep and wide tread design to help provide excellent mileage, high traction and irregular wear resistance.

Replaces:

BFGoodrich **DR675**
Hankook **DM04**
Yokohama **LY053**



FD835 pg 19
On/Off-Highway Drive Radial

An on/off-highway drive tire includes block design with angled siping helps to provide aggressive traction for both on and off highway use and a tough tread compound helps resist cuts, chips, chunks, and tears.

Replaces:

Dunlop **SP 881**
Yokohama **LY053**



FS818 pg 20-21
*On/Off-Highway
All-Position Wide Base Radial*

A wide base design for higher payloads and special tread compounds to help resist cuts, chips, tearing and irregular wear.

Replaces:


BFGoodrich **ST565**
Hankook **AM15**

TIRE CARE & SERVICE TIPS
FOR COMMERCIAL TRUCK TIRES

- » **Do not exceed your tire's maximum recommended speed which may be lower than posted speed limits**
- » **Select the right tire for the job considering the proper tire size, load carrying capacity, speed capability and service type**
- » **Set and maintain proper cold inflation pressures**
- » **Inspect your tires frequently for damage such as cuts, cracks, bulges and penetrations**

FIRESTONE TECHNICAL SERVICE

(800) 847-3272

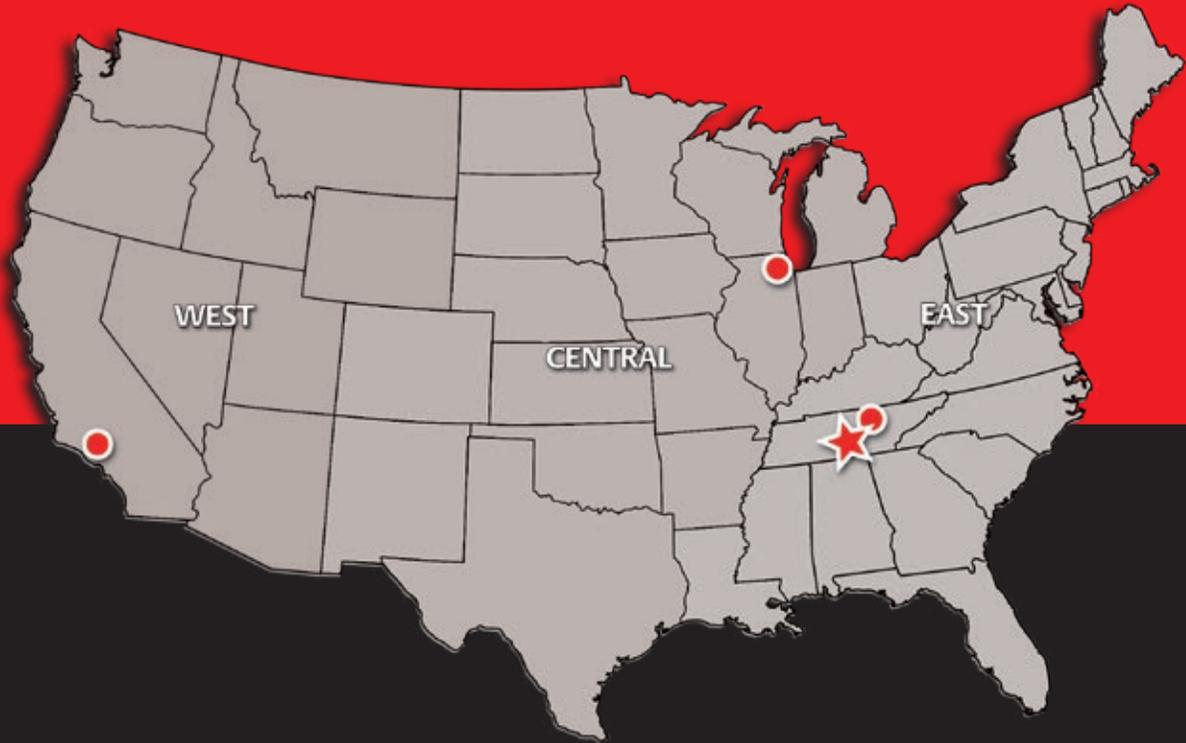

WEST

2500 South Doubleday
Ontario, CA 91761

CENTRAL

2100 Internationale Pkwy
Woodridge, IL 60517

EAST

201 Bridgestone Pkwy
Lebanon, TN 37090

Home Office

(615) 937-1000

200 4th Avenue South
Nashville, TN 37201

Firestone

commercial.firestone.com