



FT455 PLUS

LONG-AND
REGIONAL-HAUL
Trailer Radial

CLASSIC



FUEL EFFICIENT & LONG LASTING

The Firestone FT455 PLUS is leveraging the proven technologies to deliver the dependable performance to the fleets with achieving EPA SmartWay verified and CARB-compliant fuel efficiency.

With features such as straight, flow-through grooves and the innovative sidewall design, the FT455 PLUS is designed for single- and tandem-axle trailer and dolly application in long and regional-haul service.

DRIVE A FIRESTONE



EPA Smart Way verified and CARB-compliant.

Firestone

FT455 PLUS FEATURES & BENEFITS

A»

A

STRAIGHT, FLOW-THROUGH GROOVES

promote smooth rib-wear patterns and evacuate water effectively for solid wet traction

B

B

FUEL EFFICIENT TREAD DESIGN

Shallow trailer-style tread depth and five-rib design provide long even wear on free-rolling axles while achieving low rolling resistance as a Smartway verified trailer tire.




FUEL EFFICIENT TRAILER TREAD DESIGN

Shallow trailer-style tread depth and five-rib design provide long even wear on free-rolling axles.

INTELLISHAPE SIDEWALL

Low bead filler volume reduces tire weight and minimizes rolling resistance for enhanced fuel efficiency.

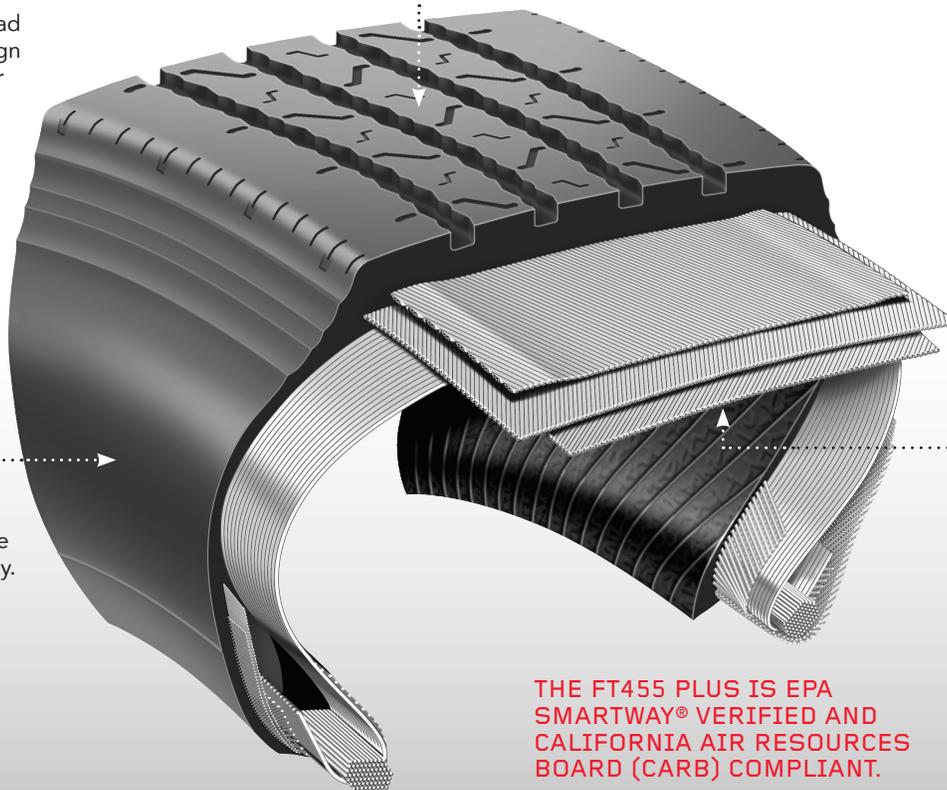

OPTIMIZED BELT PACKAGE

Achieves durability and retreadability while delivering reduced weight for improved rolling resistance and payload.

THE FT455 PLUS IS EPA SMARTWAY® VERIFIED AND CALIFORNIA AIR RESOURCES BOARD (CARB) COMPLIANT.

| FT455 PLUS TIRE SIZE | Load Range | Article Number | Weight [lbs/kg] | Meas. Rim [in] | Overall Diameter [in/mm] | Overall Width [in/mm] | Static Loaded Radius [in/mm] | Overall Width Loaded [in/mm] | Revs [per mile/km] | Tread Depth [32"/mm] | Max Load Capacity | | Inflation Pressure [PSI/kPa] | Max Speed [mph/kph] |
|----------------------|------------|----------------|-----------------|----------------|--------------------------|-----------------------|------------------------------|------------------------------|--------------------|----------------------|-------------------|---------------|------------------------------|---------------------|
| | | | | | | | | | | | Single [lbs/kg] | Dual [lbs/kg] | | |
| 295/75R22.5 metric | G | 11609 | 95 43 | 8.25 | 39.9 1013 | 10.9 277 | 18.6 472 | 12.0 305 | 521 324 | 12 10 | 6175 2800 | 5675 2575 | 110 760 | 75 120 |
| 11R22.5 metric | G | 11611 | 106 48 | 8.25 | 41.0 1041 | 10.7 273 | 19.1 485 | 11.8 300 | 506 314 | 12 10 | 6175 2800 | 5840 2650 | 105 720 | 75 120 |

Warranty and additional technical information is available at FirestoneTruckTires.com, or from your dealer or truck stop.

DEPENDABLE. DURABLE. GUARANTEED.*

At Firestone, we back up our promises so you never have to back down on yours. That's why we guarantee the durability and dependability of our tires with an unparalleled 90 day buy-and-try guarantee.

See your Firestone Sales Representative for details.

*Certain conditions and limitations apply.

